



OcNOS®

**Open Compute
Network Operating System
for Data Centers
Version 6.5.3**

OpenConfig Command Reference

November 2024

© 2024 IP Infusion Inc. All Rights Reserved.

This documentation is subject to change without notice. The software described in this document and this documentation are furnished under a license agreement or nondisclosure agreement. The software and documentation may be used or copied only in accordance with the terms of the applicable agreement. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or any means electronic or mechanical, including photocopying and recording for any purpose other than the purchaser's internal use without the written permission of IP Infusion Inc.

IP Infusion Inc.
3979 Freedom Circle
Suite 900
Santa Clara, California 95054
<http://www.ipinfusion.com/>

For support, questions, or comments via E-mail, contact:
support@ipinfusion.com

Trademarks:

IP Infusion and OcNOS are trademarks or registered trademarks of IP Infusion. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Use of certain software included in this equipment is subject to the IP Infusion, Inc. End User License Agreement at <http://www.ipinfusion.com/license>. By using the equipment, you accept the terms of the End User License Agreement.

Contents

Preface	24
IP Maestro Support	24
Audience	24
Conventions	24
Related Documentation	24
Migration Guide	24
Feature Availability	24
Support	25
Comments	25
Introduction	26
Overview	26
Feature Characteristics	26
Benefits	26
Prerequisites	26
Troubleshooting	26
Limitations	27
OpenConfig Configurations	27
Network-instance Object Values for “type” Attribute	27
Enable OpenConfig Translation	28
OpenConfig Optical-Channel and Terminal Device	29
Overview	29
Enable OpenConfig Translation	29
Enable Coherent modules	30
Configuration	30
Validation	31
Host Interface, Network Interface, and Logical Channels	32
Optical-channel	32
Logical-Channel	33
Optical-channel and Logical-channel behavior on OcNOS	33
Loopback-type on Host Interface	34
Configuration	34
Validation with Netconf get	35
Unconfiguration	35
Loopback-type on Network Interface	36
Configuration	36
Validation with Netconf get	37
Unconfiguration	38
Disable Coherent-Modules	38
Configuration	38
Validation with Netconf get	39
Operational-Mode	40
Configuration	40
Validation with Netconf get	41
Unconfiguration	42

Restriction	42
Soft-tx-disable	43
Configuration	43
Validation with Netconf get	44
Unconfiguration	44
tx-laser-freq	45
Configuration	45
Validation with Netconf get	46
Unconfiguration	47
Restriction	47
tx-output-power	47
Configuration	47
Validation with Netconf get	48
Unconfiguration	49
ISIS OpenConfig Translation	50
General Restrictions	50
Operation create	50
Deletion of AFI-SAFI	50
Create IS-IS instance	50
Release	50
OpenConfig NetConf Payload	50
OcNOS CLI Command	51
OcNOS NetConf Payload	51
Restrictions	51
Configure global parameters	52
Release	52
OpenConfig NetConf Payload	52
OcNOS CLI Command	53
OcNOS NetConf Payload	53
Restrictions	53
Configure level traffic-engineering	54
Release	54
OpenConfig NetConf Payload	54
OcNOS CLI Command	55
OcNOS NetConf Payload	55
Restrictions	55
Configure AF IPv6 support	56
Release	56
OpenConfig NetConf Payload	56
OcNOS CLI Command	57
OcNOS NetConf Payload	57
Restrictions	57
Configure metric parameter on AF IPv6	58
Release	58
OpenConfig NetConf Payload	58
OcNOS CLI Command	59

OcNOS NetConf Payload	59
Restrictions	59
Configure Global Timers parameters	60
Release	60
OpenConfig NetConf Payload	60
OcNOS CLI Command	61
OcNOS NetConf Payload	61
Restrictions	62
Configure Global Transport parameter	62
Release	62
OpenConfig NetConf Payload	62
OcNOS CLI Command	63
OcNOS NetConf Payload	63
Restrictions	64
Configure LSP-BIT parameter	64
Release	64
OpenConfig NetConf Payload	64
OcNOS CLI Command	65
OcNOS NetConf Payload	65
Restrictions	66
Configure Inter-level Propagation Policies parameter	66
Release	66
OpenConfig NetConf Payload	66
OcNOS CLI Command	67
OcNOS NetConf Payload	67
Restrictions	68
Configure Graceful Restart parameter	68
Release	68
OpenConfig NetConf Payload	68
OcNOS CLI Command	69
OcNOS NetConf Payload	69
Restrictions	70
Configure Metric Style parameter	70
Release	70
OpenConfig NetConf Payload	70
OcNOS CLI Command	71
OcNOS NetConf Payload	71
Restrictions	71
Configure Authentication parameter	71
Release	72
OpenConfig NetConf Payload	72
OcNOS CLI Command	73
OcNOS NetConf Payload	73
Restrictions	73
Configure Interface IS-IS Parameter	74
Release	74
OpenConfig NetConf Payload	74

OcNOS CLI Command	75
OcNOS NetConf Payload	75
Restrictions	75
Configure Interface Authentication Parameter	75
Release	75
OpenConfig NetConf Payload	76
OcNOS CLI Command	77
OcNOS NetConf Payload	77
Restrictions	77
Configure Interface IGP-LDP-SYNC Parameter	77
Release	78
OpenConfig NetConf Payload	78
OcNOS CLI Command	79
OcNOS NetConf Payload	79
Restrictions	79
Configure Interface Circuit-type Parameter	79
Release	79
OpenConfig NetConf Payload	80
OcNOS CLI Command	80
OcNOS NetConf Payload	81
Restrictions	81
Configure Primary IP Address	81
Release	81
OpenConfig NetConf Payload	81
OcNOS CLI Command	82
OcNOS NetConf Payload	82
Restrictions	83
Configure Interface Passive Parameter	83
Release	83
OpenConfig NetConf Payload	83
OcNOS CLI Command	84
OcNOS NetConf Payload	84
Restrictions	84
Configure Interface IPv6 AF Parameter	85
Release	85
OpenConfig NetConf Payload	85
OcNOS CLI Command	86
OcNOS NetConf Payload	86
Restrictions	86
Configure Interface BFD Parameter	86
Release	86
OpenConfig NetConf Payload	86
OcNOS CLI Command	87
OcNOS NetConf Payload	88
Restrictions	88
Configure Interface Priority Parameter	88
Release	88

OpenConfig NetConf Payload	88
OcNOS CLI Command	89
OcNOS NetConf Payload	89
Restrictions	90
Configure Interface Timers Parameter	90
Release	90
OpenConfig NetConf Payload	90
OcNOS CLI Command	92
OcNOS NetConf Payload	92
Restrictions	93
BGP OpenConfig Translation	94
Create BGP Instance	94
Release	94
OpenConfig NetConf Payload	94
OcNOS CLI Command	94
OcNOS NetConf Payload	95
Validation with NetConf get	95
Restrictions	97
Create BGP Global with default VRF	97
Release	97
OpenConfig NetConf Payload	97
OcNOS CLI Command	100
OcNOS NetConf Payload	101
Validation with NetConf get	102
Restrictions	108
Create BGP Global with User-defined VRFs	109
Release	109
OpenConfig NetConf Payload	109
OcNOS CLI Command	112
OcNOS NetConf Payload	112
Validation with NetConf get	113
Restrictions	119
Create BGP Neighbors	120
Release	120
OpenConfig NetConf Payload	120
OcNOS CLI Command	126
OcNOS NetConf Payload	127
Validation with NetConf get	131
Restrictions	135
Configure eBGP Neighbor with TTL	136
Release	136
OpenConfig NetConf Payload	136
OcNOS CLI Command	138
OcNOS NetConf Payload	139
Validation with NetConf get	140
Restrictions	142

Create BGP Peer-groups with Default VRF	143
Release	143
OpenConfig NetConf Payload	143
OcNOS CLI Command	147
OcNOS NetConf Payload	148
Validation with NetConf get	154
Restrictions	160
Create BGP Peer-groups with User-defined VRFs	160
Release	160
OpenConfig NetConf Payload	161
OcNOS CLI Command	164
OcNOS NetConf Payload	165
Validation with NetConf get	169
Restrictions	174
Configure Update-source on Neighbor	175
Release	175
OpenConfig NetConf Payload	175
OcNOS CLI Command	176
OcNOS NetConf Payload	176
Validation with NetConf get	177
Restrictions	178
Double Link in Load Balance	179
Release	179
OpenConfig NetConf Payload	179
OcNOS CLI Command	181
OcNOS NetConf Payload	182
Validation with NetConf get	184
Restrictions	188
Delete BGP Instance	188
Release	188
OpenConfig NetConf Payload	188
OcNOS NetConf Payload	189
Restrictions	190
BGP RIB Counters IPv4	190
Release	191
OpenConfig NetConf Payload	191
OcNOS CLI Command	191
OcNOS NetConf Payload	192
Validation with NetConf get	201
Restrictions	207
BGP RIB Counters IPv6	208
Release	209
OpenConfig NetConf Payload	209
OcNOS CLI Command	209
OcNOS NetConf Payload	209
Validation with NetConf get	219
Restrictions	228

OSPFv2 Openconfig Translation	229
Create OSPF Process	229
Release	229
OpenConfig NETCONF Payload	229
OcNOS CLI Command	230
OcNOS NetConf Payload	231
Validation with NetConf get	232
Restrictions	234
Create OSPF Process	234
Release	234
OpenConfig NETCONF Payload	234
OcNOS CLI Command	238
OcNOS NETCONF Payload	238
Validation with NETCONF get	241
Restrictions	245
Interface Configuration OpenConfig Translation	246
Configure Interfaces	246
Release	246
OpenConfig NetConf Payload	246
OcNOS CLI Command	247
OcNOS NetConf Payload	247
Validation with NetConf get	248
Restrictions	250
Configure Description	250
Release	250
OpenConfig NetConf Payload	250
OcNOS CLI Command	250
OcNOS NetConf Payload	250
Validation with NetConf get	251
Restrictions	252
Configure MTU	252
Release	252
OpenConfig NetConf Payload	252
OcNOS CLI Command	252
OcNOS NetConf Payload	253
Validation with NetConf get	253
Restrictions	254
Configure Primary IP Address	254
Release	255
OpenConfig NetConf Payload	255
OcNOS CLI Command	255
OcNOS NetConf Payload	255
Validation with NetConf get	256
Restrictions	257
Configure Secondary IP Address	257
Release	258

OpenConfig NetConf Payload	258
OcNOS CLI Command	258
OcNOS NetConf Payload	259
Validation with NetConf get	259
Restrictions	261
Configure IPv6 Addresses	261
Release	261
OpenConfig NetConf Payload	261
OcNOS CLI Command	262
OcNOS NetConf Payload	262
Validation with NetConf get	263
Restrictions	264
Configure Duplex-mode	264
Release	264
OpenConfig NetConf Payload	264
OcNOS CLI Command	265
OcNOS NetConf Payload	265
Validation with NetConf get	265
Restrictions	266
Default	266
Configure Port-Speed	267
Release	267
OpenConfig NetConf Payload	267
OcNOS CLI Command	267
OcNOS NetConf Payload	267
Validation with NetConf get	268
Restrictions	269
Configure Ethernet Type	269
Release	269
OpenConfig NetConf Payload	269
OcNOS CLI Command	270
OcNOS NetConf Payload	270
Validation with NetConf get	270
Restrictions	271
Configure Sub-interface with Primary and Secondary Addresses	271
Release	272
OpenConfig NetConf Payload	272
OcNOS CLI Command	272
OcNOS NetConf Payload	273
Validation with NetConf get	273
Restrictions	274
LACP OpenConfig Translation	275
Create Static LAG Interface	275
Release	275
OpenConfig NetConf Payload	275
OcNOS CLI Command	276

OcNOS NetConf Payload	276
Validation with NetConf get	278
Restrictions	282
Create Dynamic LAG Interface	282
Release	282
OpenConfig NetConf Payload	283
OcNOS CLI Command	283
OcNOS NetConf Payload	284
Validation with NetConf get	284
Restrictions	286
Tunnel Interfaces OpenConfig Translation	287
Create Tunnel Interface	287
Release	287
OpenConfig NetConf Payload	287
OcNOS CLI Command	287
OcNOS NetConf Payload	288
Validation with NetConf get	288
Restrictions	289
Static Route OpenConfig Translation	291
Create a static route	291
Release	291
OpenConfig NetConf Payload	291
OcNOS CLI Command	293
OcNOS NetConf Payload	293
Validation with NetConf get	294
Restrictions	296
Create a Static Route with Load Balancing	297
Release	297
OpenConfig NetConf Payload	297
OcNOS CLI Command	299
OcNOS NetConf Payload	299
Validation with NetConf get	300
Restrictions	303
Create a Static Route with Active/Standby	303
Release	303
OpenConfig NetConf Payload	303
OcNOS CLI Command	305
OcNOS NetConf Payload	305
Validation with NetConf get	306
Restrictions	309
Use Cases	309
Platform OpenConfig Translation	310
Description	310
FAN	310
OpenConfig Filter	310

Get OpenConfig Return	310
Get OcNOS Result	316
Show command	323
RAM	323
OpenConfig Filter	323
Get OpenConfig Return	323
OcNOS get result	324
Show command	325
Hard-disk	326
OpenConfig Filter	326
Get OpenConfig Return	326
OcNOS get result	326
Show command	328
PSU	329
OpenConfig Filter	329
Get OpenConfig Return	329
OcNOS get result	330
Show command	332
Temperature	333
OpenConfig Filter	333
Get OpenConfig return	333
OcNOS get result	335
Show command	337
Transceiver	337
OpenConfig Filter	337
Get OpenConfig return	338
OcNOS get result	371
Show command	411
EEPROM	413
OpenConfig Filter	413
OpenConfig get result	414
OcNOS get result	414
Show command	423
CPU	423
OpenConfig Filter	424
OpenConfig get result	424
OcNOS get result	424
Show command	425
System OpenConfig Translation	426
Host	426
Release	426
OpenConfig NETCONF Payload	426
OcNOS CLI command	426
OcNOS NETCONF Payload	426
Validation	426
Unconfiguration	427

Restriction	427
TimeZone Clock	427
Release	427
OpenConfig NETCONF Payload	427
OcNOS CLI command	428
OcNOS NETCONF Payload	428
Validation	428
Restrictions	429
Rsyslog	429
Release	429
OpenConfig NETCONF Payload	429
OcNOS CLI command	429
OcNOS NETCONF Payload	429
Validation	430
Restrictions	430
Logging Remote Server	430
Release	430
OpenConfig NETCONF Payload	430
OcNOS CLI command	431
OcNOS NETCONF Payload	431
Validation	432
Restrictions	432
Logging Remote Facility	433
Release	433
OpenConfig NETCONF Payload	433
OcNOS CLI command	434
OcNOS NETCONF Payload	434
Validation	434
Restrictions	435
Alarms	436
Release	436
Get OpenConfig Payload	436
Get OpenConfig Return	436
OcNOS CLI show command	437
Restrictions	437
VLAN OpenConfig Translation	438
Match Single Tagged VLAN	438
Release	438
OpenConfig NetConf Payload	438
OcNOS CLI Command	438
OcNOS NetConf Payload	439
Validation with NetConf get	439
Restrictions	440
Match single tagged VLAN range	440
Release	440
OpenConfig NetConf Payload	440

OcNOS CLI Command	441
OcNOS NetConf Payload	441
Validation with NetConf get	441
Restrictions	443
Match double tagged VLAN	443
Release	443
OpenConfig NetConf Payload	443
OcNOS CLI Command	444
OcNOS NetConf Payload	444
Validation with NetConf get	444
Restrictions	445
Match double tagged with outer and inner VLAN	445
Release	445
OpenConfig NetConf Payload	445
OcNOS CLI Command	446
OcNOS NetConf Payload	446
Validation with NetConf get	447
Restrictions	448
Ingress-mapping actions	448
Release	448
OpenConfig NetConf Payload	448
OcNOS CLI Command	449
OcNOS NetConf Payload	449
Validation with NetConf get	449
Restrictions	451
Trunk VLANs in interface	451
Release	451
OpenConfig NetConf Payload	451
OcNOS CLI Command	452
OcNOS NetConf Payload	452
Validation with NetConf get	454
Restrictions	457
Trunk interface with native VLAN	457
Release	457
OpenConfig NetConf Payload	457
OcNOS CLI Command	458
OcNOS NetConf Payload	458
Validation with NetConf get	458
Restrictions	460
Access VLAN in interface	460
Release	460
OpenConfig NetConf Payload	460
OcNOS CLI command	461
OcNOS NetConf Payload	461
Validation with NetConf get	462
Restrictions	464
Trunk VLANs in link aggregation interface	464

Release	464
OpenConfig NetConf Payload	464
OcNOS CLI Command	465
OcNOS NetConf Payload	465
Validation with NetConf get	467
Restrictions	468
Trunk LAG with native VLAN	468
Release	468
OpenConfig NetConf Payload	468
OcNOS CLI Command	469
OcNOS NetConf Payload	470
Validation with NetConf get	471
Restrictions	473
Creation of a cross connect	473
Release	473
OpenConfig NetConf Payload	473
OcNOS CLI Command	474
OcNOS NetConf Payload	475
Validation with NetConf get	476
Restrictions	477
Deletion of a cross connect	477
Release	477
OpenConfig NetConf Payload	477
OcNOS CLI Command	477
OcNOS NetConf Payload	478
Validation with NetConf get	478
Restrictions	478
Configure Bridge Domain and associate L2 Subinterfaces	478
Release	478
OpenConfig NetConf Payload	478
OcNOS CLI Command	480
OcNOS NetConf Payload	480
Restrictions	482
Deletion of a Bridge Domain instance	482
Release	482
OpenConfig NetConf Payload	482
OcNOS CLI Command	482
OcNOS NetConf Payload	482
Validation with NetConf get	482
Restrictions	483
Creation of a VLAN bridge	483
Release	483
OpenConfig NetConf Payload	483
OcNOS CLI Command	483
OcNOS NetConf Payload	484
Validation with NetConf get	484
Restrictions	485

LLDP OpenConfig Translation	486
Enable Management Attributes	486
Release	486
OpenConfig NETCONF Payload	486
OcNOS CLI command	486
OcNOS NETCONF Payload	486
Validation with NETCONF get	487
Restrictions	487
Configure chassis-id	487
Release	487
OpenConfig NETCONF Payload	487
OcNOS CLI command	487
OcNOS NETCONF Payload	488
Validation with NETCONF get	488
Restrictions	488
Configure suppress advertisement	488
Release	488
OpenConfig NETCONF Payload	489
OcNOS CLI command	489
OcNOS NETCONF Payload	489
Validation with NETCONF get	489
Restrictions	490
Configure system name	490
Release	490
OpenConfig NETCONF Payload	490
OcNOS CLI command	490
OcNOS NETCONF Payload	490
Validation with NETCONF get	491
Restrictions	491
Enable LLDP on an interface	491
Release	491
OpenConfig NETCONF Payload	491
OcNOS CLI command	492
OcNOS NETCONF Payload	492
Validation with NETCONF get	492
Restrictions	492
LLDP get Attributes	492
Counters	493
OpenConfig Filter	493
OpenConfig get result	493
OcNOS get result	493
Restrictions	493
Interface counters	494
OpenConfig Filter	494
OpenConfig get result	494
OcNOS get result	494
Restrictions	495

Neighbors	495
OpenConfig Filter	495
OpenConfig get result	495
OcNOS get result	497
Neighbors name and description	498
OpenConfig Filter	499
OpenConfig get result	499
OcNOS get result	500
Neighbors chassis-id, type and ttl	501
OpenConfig Filter	501
OpenConfig get result	502
OcNOS get result	503
Neighbors port-id, type and description	504
OpenConfig Filter	504
OpenConfig get result	504
OcNOS get result	505
Neighbors custom TLVs type/subtype	506
OpenConfig Filter	506
OpenConfig get result	507
OcNOS get result	511
Neighbors custom TLVs	512
OpenConfig Filter	512
OpenConfig get result	512
OcNOS get result	514
Neighbors capabilities	514
OpenConfig Filter	514
OpenConfig get result	515
OcNOS get result	517
ACL OpenConfig Translation	518
Enable Management Attributes	518
Release	518
OpenConfig NetConf Payload	518
OcNOS CLI Command	519
OcNOS NetConf Payload	519
Validation with NetConf get	519
Restrictions	520
Create IPv4 Entries	520
Release	521
OpenConfig NetConf Payload	521
OcNOS CLI Command	522
OcNOS NetConf Payload	522
Validation with NetConf get	522
Restrictions	523
Create IPv6 Entries	524
Release	524
OpenConfig NetConf Payload	524

OcNOS CLI Command	525
OcNOS NetConf Payload	525
Validation with NetConf get	526
Restrictions	527
Create Interfaces Egress for IPv4/IPv6	527
Release	527
OpenConfig NetConf Payload	527
OcNOS CLI Command	528
OcNOS NetConf Payload	528
Validation with NetConf get	529
Restrictions	529
Create Interfaces Ingress for IPv4/IPv6	530
Release	530
OpenConfig NetConf Payload	530
OcNOS CLI Command	530
OcNOS NetConf Payload	531
Validation with NetConf get	531
Restrictions	532
Create Interfaces Egress for L2	532
Release	532
OpenConfig NetConf Payload	532
OcNOS CLI Command	533
OcNOS NetConf Payload	533
Validation with NetConf get	533
Restrictions	534
Create Interfaces Ingress for L2	534
Release	534
OpenConfig NetConf Payload	534
OcNOS CLI Command	535
OcNOS NetConf Payload	535
Validation with NetConf get	536
Restrictions	536
QoS OpenConfig Translation	537
Enable QoS on OcNOS	537
Release	537
Configuration	537
OpenConfig NetConf Payload	537
OcNOS CLI command	537
OcNOS NetConf Payload	537
Validation with NetConf get	537
Restrictions	538
Enable QoS Profile on OcNOS	538
Release	538
Configuration	538
OpenConfig NetConf Payload	538
OcNOS CLI command	538

OcNOS NetConf Payload	538
Validation with NetConf get	538
Restrictions	538
Create Classifiers Profiles	539
Release	539
Configuration	539
OpenConfig NetConf Payload	539
OcNOS CLI command	541
OcNOS NetConf Payload	541
Validation with NetConf get	544
Restrictions	547
Create Forwarding-groups Profiles	547
Release	547
Configuration	547
OpenConfig NetConf Payload	547
OcNOS CLI command	547
OcNOS NetConf Payload	547
Validation with NetConf get	548
Restrictions	548
Create Queues and Queue-Management-profiles Entries	548
Release	548
Configuration	548
OpenConfig NetConf Payload	548
OcNOS CLI command	549
OcNOS NetConf Payload	549
Validation with NetConf get	550
Restrictions	551
Create Scheduler-policies Entries	551
Release	551
Configuration	551
Create Scheduler-policies entries without leaf max-queue-depth-bytes	552
Release	552
Configuration	552
OpenConfig NetConf Payload	552
OcNOS CLI command	555
OcNOS NetConf Payload	555
Validation with NetConf get	560
Restrictions	564
Create Scheduler-policies Entries with leaf max-queue-depth-bytes	565
Release	565
Configuration	565
OpenConfig NetConf Payload	565
OcNOS CLI command	568
OcNOS NetConf Payload	569
Validation with NetConf get	574
Restrictions	578
Create Interfaces Classifier Association	580

Release	580
Configuration	580
OpenConfig NetConf Payload	580
OcNOS CLI command	582
OcNOS NetConf Payload	582
Validation with NetConf get	584
Restrictions	588
Create Interfaces Scheduler-policies Association	588
Release	588
Configuration	589
OpenConfig NetConf Payload	589
OcNOS CLI command	590
OcNOS NetConf Payload	591
Validation with NetConf get	592
Restrictions	595
EVPN Openconfig Translation	596
Configure EVPN-MAC with inter-instance-policies	596
Release	596
OpenConfig NetConf Payload	596
OcNOS CLI Command	596
OcNOS NetConf Payload	597
Validation with NetConf get	597
Restrictions	598
Configure EVPN-VPLS type	598
Release	599
Initial Configuration:	599
OcNOS CLI Command	599
OcNOS NetConf Payload	600
OpenConfig NetConf Payload	602
Validation with NetConf get	608
Restrictions	619
Configure EVPN-VPWS type	619
Release	619
Initial Configuration:	619
OcNOS CLI Command	619
OcNOS NetConf Payload	620
OpenConfig NetConf Payload	622
Validation with NetConf get	628
Restrictions	638
OpenZR+ OpenConfig Translation	640
General Restrictions	640
Operation create	640
Operation merge and create	640
Laser frequency configuration in OpenZR+ media channel	640
Disable/enable OpenZR+ transceiver	640
Release	640

Disable configuration	640
OpenConfig NetConf Payload	640
OcNOS CLI Command	641
OcNOS NetConf Payload	641
Enable configuration	641
OpenConfig NetConf Payload	641
OcNOS CLI Command	642
OcNOS NetConf Payload	642
Configure OpenZR+ optical channel operational mode	642
Release	642
OpenConfig NetConf Payload	642
OcNOS CLI Command	642
OcNOS NetConf Payload	643
Unconfiguration	643
OpenConfig NetConf Payload	643
OcNOS CLI Command	643
OcNOS NetConf Payload	643
Configure OpenZR+ optical channel target output power	644
Release	644
OpenConfig NetConf Payload	644
OcNOS CLI Command	644
OcNOS NetConf Payload	644
Unconfiguration	645
OpenConfig NetConf Payload	645
OcNOS CLI Command	645
OcNOS NetConf Payload	645
Configure OpenZR+ optical channel frequency	646
Release	646
OpenConfig NetConf Payload	646
OcNOS CLI Command	646
OcNOS NetConf Payload	646
Unconfiguration	647
OpenConfig NetConf Payload	647
OcNOS CLI Command	647
OcNOS NetConf Payload	647
Configure OpenZR+ loopback mode	648
Release	648
OpenConfig NetConf Payload	648
OcNOS CLI Command	648
OcNOS NetConf Payload	649
Unconfiguration	649
OpenConfig NetConf Payload	649
OcNOS CLI Command	649
OcNOS NetConf Payload	649
Validate OpenZR+ module state	650
Release	650
Get OpenConfig Payload	650

Get OpenConfig Return	650
Validate OpenZR+ transceiver state	651
Release	651
Get OpenConfig Payload	651
Get OpenConfig Return	651
Validate OpenZR+ transceiver thresholds	652
Release	652
Severity CRITICAL	652
Get OpenConfig Payload	652
Get OpenConfig Return	652
Severity MAJOR	653
Get OpenConfig Payload	653
Get OpenConfig Return	653
Validate OpenZR+ transceiver physical channels	654
Release	654
Get OpenConfig Payload	654
Get OpenConfig Return	654
Validate OpenZR+ transceiver optical channel state	655
Release	655
Get OpenConfig Payload	655
Get OpenConfig Return	655
Validate OpenZR+ logical channels	657
Release	657
Optical channel assignment type	657
Get OpenConfig Payload	657
Get OpenConfig Return	658
Logical channel assignment type	658
Get OpenConfig Payload	659
Get OpenConfig Return	659
Configure OpenZR+ port-breakout	660
Release	660
OpenConfig NetConf Payload	660
OcNOS CLI Command	661
OcNOS NetConf Payload	661
Unconfiguration	661
OpenConfig NetConf Payload	661
OcNOS CLI Command	662
OcNOS NetConf Payload	662
Validate OpenZR+ port-breakout	662
Release	662
Get OpenConfig Payload	662
Get OpenConfig Return	663
PYANG Tree	664
module: openconfig-acl	664
module: openconfig-bfd	667
module: openconfig-if-aggregate	669

module: openconfig-if-ip	669
module: openconfig-interfaces	675
module: openconfig-lacp	682
module: openconfig-lldp	682
module: openconfig-network-instance	684
module: openconfig-platform	729
module: openconfig-qos	735
module: openconfig-routing-policy	740
module: openconfig-system	742
module: openconfig-terminal-device	743
module: openconfig-terminal-device-properties	745
module: ipi-oc-if-deviations	746

Preface

This guide contains OpenConfig commands for OcNOS.

Note: OcNOS DC 6.5 no longer supports MPLS-based or MPLS-related features.

IP Maestro Support

Monitor devices running OcNOS Release 6.3.4-70 and above using IP Maestro software.

Audience

This guide is intended for network operators who configure and manage multi-vendor networks.

Conventions

[Table 3.1](#) shows the conventions used in this guide.

Table 3.1: Conventions

Convention	Description
<i>Italics</i>	Emphasized terms; titles of books
Note:	Special instructions, suggestions, or warnings
<code>monospaced type</code>	Code elements such as commands, functions, parameters, files, and directories

Related Documentation

For information about installing OcNOS, see the *Installation Guide* for your platform.

Migration Guide

Check the *Migration Guide* for configuration changes to make when migrating from one version of OcNOS to another.

Feature Availability

The features described in this document are available depending upon the OcNOS SKU that you purchased. See the *Feature Matrix* for a description of the OcNOS SKUs.

Support

For support-related questions, contact support@ipinfusion.com.

Comments

If you have comments, or need to report a problem with the content, contact techpubs@ipinfusion.com.

Introduction

Overview

OpenConfig Translation feature is designed to enable NETCONF clients to interact with OcNOS (a network operating system) using standardized YANG models, particularly OpenConfig. This feature involves translating data between OpenConfig and OcNOS data models, primarily for `edit-config`, `get-config`, `get`, and `notification` operations. A Translation Framework has been developed to facilitate these translations.

Feature Characteristics

It is primarily designed to work with OpenConfig 2.0.0 and uses the latest models available at the time of implementation.

The feature targets network operators who wish to manage their multi-vendor network using a standardized interface, reducing operational costs and complexity.

Benefits

The OpenConfig Translation benefits are listed below:

Standardization: Allows network operators to manage OcNOS products using standardized YANG models, promoting consistency and simplifying network management.

Multi-Vendor Support: Facilitates the management of multi-vendor networks through a unified interface.

Flexibility: Supports the translation of both OpenConfig and OcNOS data models, offering flexibility to network administrators.

Error Reporting: Enables error reporting using OpenConfig paths, enhancing troubleshooting and diagnostics.

Prerequisites

Here are the prerequisites for OpenConfig Translation:

- The feature depends on using OpenConfig or OcNOS data models in the NETCONF client.
- The OcNOS NetConf server needs to be restarted and configured with translation enabled.
- The translation is based on OpenConfig release 2.0.0.

Troubleshooting

- Error reporting is done using OpenConfig paths; unknown or unsupported leafs are ignored.
- The translation may lead to the rejection of configuration if unsupported parts are encountered.
- Ensure that the correct data models are used, and translations are properly configured.

Limitations

- Certain operations such as "replace" and "create" might not be supported on all nodes.
- Not all network configurations may be visible through NetConf if they are not supported by the translation.
- Support for RPCs and notifications in OpenConfig models are not supported.

OpenConfig Configurations

This document describes the OpenConfig configurations and state attributes supported by OcNOS SP and RON versions 4.2, 5.0, 5.1, 6.1 and 6.2, as well the limitations that apply to some of the paths.

Network-instance Object Values for “type” Attribute

Several protocols are configured inside the Network-instance object, and what distinguishes them is the value of the `/network-instances/network-instance/config/type` attribute. Additionally, for some protocols, it is necessary to configure the leaf `/network-instances/network-instance/encapsulation/config/encapsulation-type`.

Below, there is a table listing all the values used for the current translated protocols.

OcNOS Network Instance (NI) type xpath: <code>/network-instances/network-instance/instance-type</code>	Open Config NI type xpath: <code>/network-instances/network-instance/config/type</code>
vrf	L3VRF DEFAULT_INSTANCE
mac-vrf	L2L3 + leaf <code>/network-instances/network-instance/encapsulation/config/encapsulation-type</code> as "MPLS"
l2ni (bridge)	L2L3
vpls	L2VSI + leaf <code>/network-instances/network-instance/encapsulation/config/encapsulation-type</code> as "MPLS"
vpws	L2P2P + leaf <code>/network-instances/network-instance/encapsulation/config/encapsulation-type</code> as "MPLS"
evpn	L2L3 + leaf <code>/network-instances/network-instance/encapsulation/config/encapsulation-type</code> as "VXLAN"
cross-connect	L2P2P
bridge-domain	L2VSI

Enable OpenConfig Translation

The OpenConfig feature is disabled by default and must be enabled using the following CLI command in the OcNOS shell:

```
OcNOS>enable
OcNOS#configure terminal
OcNOS(config)#netconf translation openconfig
OcNOS(config)#commit
OcNOS#show running-config netconf translation
!
netconf translation openconfig
!
```

Or use the equivalent NetConf:

```
<netconf-server xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-management-server">
  <netconf-translation>
    <config>
      <translation-mode>openconfig</translation-mode>
    </config>
  </netconf-translation>
</netconf-server>
```

The translation is disabled using the following CLI command in the OcNOS shell:

```
OcNOS>enable
OcNOS#configure terminal
OcNOS(config)#no netconf translation
OcNOS(config)#commit
OcNOS#show running-config netconf translation
OcNOS#
```

To get the OpenConfig data, the corresponding namespace must be given:

```
yangcli ocnos@localhost> sget-config /netconf-server source=running
<rpc-reply xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <data>
    <netconf-server xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-management-server">
      <netconf-translation>
        <config>
          <translation-mode>openconfig</translation-mode>
        </config>
        <state>
          <translation-mode>openconfig</translation-mode>
        </state>
      </netconf-translation>
    </netconf-server>
  </data>
</rpc-reply>
```

OpenConfig Optical-Channel and Terminal Device

Overview

This document describes the OpenConfig configurations for Optical-Channel and Terminal Device and states the attributes supported by OcNOS versions 5.0 and 5.1 and the limitations which apply for some of the paths.

This section used to be dedicated to Optical Transport Network (OTN), but with additional OpenZR/ZR+ support in OcNOS release 6.5.0, this section applies to all platforms which support similar optical features.

Enable OpenConfig Translation

The OpenConfig feature is disabled by default and must be enabled using the following CLI command on the OcNOS shell.

```
OcNOS#cml netconf translation (disable|openconfig)
```

Or using the equivalent NETCONF RPC:

```
<netconf-translation xmlns="http://ipinfusion.com/ns/zebmcli">
  <status>disable|openconfig</status>
</netconf-translation>
```

Once enabled, the user is still able to get data in OcNOS format by specifying the required namespace:

```
yangcli ocnos@localhost> sget-config /ipi-interface:interfaces source=running
```

This generates the following RPC:

```
<get-config xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <source>
    <running/>
  </source>
  <filter type="subtree">
    <interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface"/>
  </filter>
</get-config>
```

To get OpenConfig data, the corresponding namespace must be given:

```
yangcli ocnos@localhost> sget-config /oc-if:interfaces source=running

<get-config xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <source>
    <running/>
  </source>
  <filter type="subtree">
    <interfaces xmlns="http://openconfig.net/yang/interfaces"/>
  </filter>
</get-config>
```

If OpenConfig is enabled and no filter is provided, all the supported OpenConfig models are retrieved in OpenConfig format. The OcNOS models for which no translation is supported will be retrieved in OcNOS format.

Enable Coherent modules

It is mandatory to enable the module previously for all other configurations.

Configuration

This XML configuration snippet is used to enable coherent modules (slot 6 and slot 3).

OpenConfig Netconf Payload:

Here is a sample OpenConfig NetConf Payload to enable coherent modules.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>SLOT-6</name>
    <linecard xmlns="http://openconfig.net/yang/platform/linecard">
      <config>
        <power-admin-state>oc-platform-types:POWER_ENABLED</power-admin-state>
      </config>
    </linecard>
  </component>
  <component>
    <name>SLOT-3</name>
    <linecard xmlns="http://openconfig.net/yang/platform/linecard">
      <config>
        <power-admin-state>oc-platform-types:POWER_ENABLED</power-admin-state>
      </config>
    </linecard>
  </component>
</components>
```

OcNOS CLI Command

The below CLI command is used to enable coherent modules.

```
OcNOS#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
OcNOS (config)#coherent-module 6
OcNOS (config-module)#enable
OcNOS (config-module)#commit
```

OcNOS Netconf Payload

Here is a sample OcNOS NetConf Payload to enable coherent modules.

```
<terminal-device xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform-
terminal-device">
  <coherent-module>
    <slot-index>3</slot-index>
    <config>
      <slot-index>3</slot-index>
      <service-enable/>
    </config>
  </coherent-module>
  <coherent-module>
    <slot-index>6</slot-index>
    <config>
```

```

        <slot-index>6</slot-index>
        <service-enable/>
    </config>
</coherent-module>
</terminal-device>

```

Validation

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below:

```

<filter >
<components xmlns="http://openconfig.net/yang/platform">
<component>
<name>SLOT-6</name>
<linecard xmlns="http://openconfig.net/yang/platform/linecard">
<state>
</state>
</linecard>
</component>
</components>
</filter>

```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for enabling coherent modules.

```

    <components xmlns="http://openconfig.net/yang/platform">
    <component>
    <name>SLOT-6</name>
    <linecard xmlns="http://openconfig.net/yang/platform/linecard">
    <state>
    <power-admin-state>POWER_ENABLED</power-admin-state>
    <slot-id>6</slot-id>
    </state>
    </linecard>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <name>SLOT-6</name>
    <equipment-failure xmlns="http://openconfig.net/yang/alarms">false</
equipment-failure>
    <temperature>
    <alarm-status>false</alarm-status>
    </temperature>
    <id>SLOT-6</id>
    <parent>CHASSIS</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:ACTIVE</oper-status>
    <removable>true</removable>
    <part-no>TRB200DAA-01</part-no>
    <serial-no>VCD19330008</serial-no>
    <software-version>NA</software-version>
    <firmware-version>1.5</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>LUMENTUM</mfg-name>

```


```

    <location>6</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:LINECARD</type>
  </state>
  <subcomponents xmlns="http://openconfig.net/yang/platform">
    <subcomponent>
      <name>PORT-coherent-6</name>
      <state>
        <name>PORT-coherent-6</name>
      </state>
    </subcomponent>
    <subcomponent>
      <name>PORT-ce27</name>
      <state>
        <name>PORT-ce27</name>
      </state>
    </subcomponent>
    <subcomponent>
      <name>PORT-ce28</name>
      <state>
        <name>PORT-ce28</name>
      </state>
    </subcomponent>
  </subcomponents>
</component>
</components>

```

Host Interface, Network Interface, and Logical Channels

Host interface Loopback-type and Network interface prbs-type are translated to logical channels. The correlation is shown in the image below:

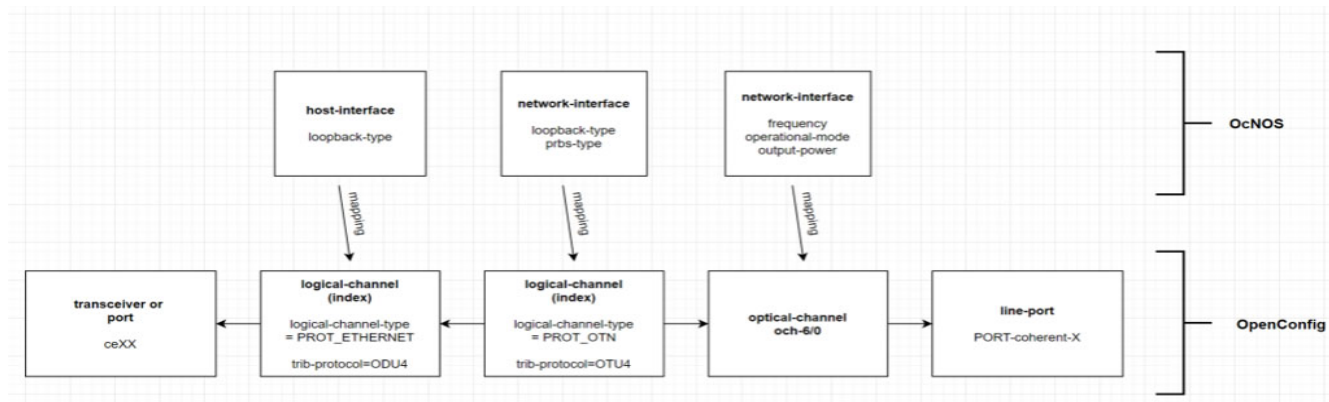

Optical-channel

The optical channel contains the following:

- frequency
- operational mode
- output-power

The network interface is translated to an Optical channel and has the same value as a coherent module slot. (i.e. slot 6/ network interface 0 → och-6/0).

Logical-Channel

The logical channel contains the following:

- loopback-type
- prbs-type

The network interface is translated to logical channels. The index is represented by a 8 digits hexa number, where:

- 2 digits for slot
- 2 digits for network interface
- 2 digits for host interface

To avoid ambiguity, 1 is added to the desired interface.

For example:

Slot 6, host-interface 1 is represented by 0x060002. In OpenConfig, this number is translated to decimal 393218.

Slot 4, network-interface 0 is represented by 0x040100. In OpenConfig, this number is translated to decimal 262400.

Optical-channel and Logical-channel behavior on OcNOS

Both optical-channel and logical-channel are mapped to `/terminal-device/coherent-module/network-interfaces/network-interface` on OcNOS. Hence, some specific information about configuration and unconfiguration are necessary.

Here is the mapping:

OcNOS XPATH	OpenConfig XPATH
<code>/terminal-device/coherent-module/network-interfaces/interface/config/frequency</code>	<code>/components/component[name=OCH-X/Y]/optical-channel/config/frequency</code>
<code>/terminal-device/coherent-module/network-interfaces/interface/config/operational-mode</code>	<code>/components/component[name=OCH-X/Y]/optical-channel/config/operational-mode</code>
<code>/terminal-device/coherent-module/network-interfaces/interface/config/target-output-power</code>	<code>/components/component[name=OCH-X/Y]/optical-channel/config/target-output-power</code>
<code>/terminal-device/coherent-module/network-interfaces/interface/config/soft-tx-disable</code>	<code>/terminal-device/logical-channels/channel[index]/config/admin-state</code>
<code>/terminal-device/coherent-module/network-interfaces/interface/config/loopback-type</code>	<code>/terminal-device/logical-channels/channel[index]/config/loopback-mode</code>

When the user creates optical-channel or logical-channel for the first time, it already creates the structure of `/terminal-device/coherent-module/network-interfaces/interface/`.

When the user wants to delete the entire component OCH or logical-channels/channel, it tries to delete `/terminal-device/coherent-module/network-interfaces/interface/`. So it is important to delete only one of them.

It is recommended to delete network-interfaces through component OCH.

Here are some examples:

```
<component operation="delete">
<name>OCH-1/0</name>
```

```
<channel operation="delete">
<index>393218</index>
```

To delete the network-interfaces/interface in OcNOS, there is a restriction that it must be empty and not have any configuration under it. So, if the user wants to delete on that level, the other configurations must be deleted one by one.

Loopback-type on Host Interface

This configuration is used to configure loopback type on the host interface.

The two possible values are: FACILITY (shallow in Netconf mode) and TERMINAL (deep in Netconf mode).

Configuration

Configure slot 6, Host-interface 1 loopback -type to shallow.

OpenConfig Netconf Payload

Here is a sample OpenConfig NetConf Payload to configure loopback type on host interface.

```
<terminal-device xmlns="http://openconfig.net/yang/terminal-device">
  <logical-channels>
    <channel>
      <index>393218</index>
      <config>
        <index>393218</index>
        <loopback-mode>oc-opt-types:FACILITY</loopback-mode>
      </config>
    </channel>
  </logical-channels>
</terminal-device>
```

OcNOS CLI Command

The below CLI command is used to configure loopback type on host interface.

```
OcNOS#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
OcNOS (config)#coherent-module 6
OcNOS (config-module)#host-interface 1
OcNOS (config-hostif)#loopback-type shallow
OcNOS (config-hostif)#commit
OcNOS (config-hostif)#
```

OcNOS Netconf Payload

Here is a sample OcNOS NetConf Payload to configure loopback type on host interface.

```
<terminal-device xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform-
terminal-device">
  <coherent-module>
    <slot-index>6</slot-index>
    <host-interfaces>
      <interface>
        <host-index>1</host-index>
        <config>
          <host-index>1</host-index>
          <loopback-type>shallow</loopback-type>
        </config>
      </interface>
    </host-interfaces>
  </coherent-module>
</terminal-device>
```

```

    </config>
  </interface>
</host-interfaces>
</coherent-module>
</terminal-device>

```

Validation with Netconf get

Get Openconfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```

<filter type="subtree">
  <terminal-device xmlns="http://openconfig.net/yang/terminal-device">
    <logical-channels>
      <channel>
        <index>393218</index>
        <state/>
      </channel>
    </logical-channels>
  </terminal-device>
</filter>

```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for configuring loopback type on host interface.

```

<terminal-device xmlns="http://openconfig.net/yang/terminal-device">
  <logical-channels>
    <channel xmlns:oc-opt-types="http://openconfig.net/yang/transport-types">
      <index>393218</index>
      <state>
        <index>393218</index>
        <logical-channel-type>oc-opt-types:PROT_ETHERNET</logical-channel-
type>
        <trib-protocol>oc-opt-types:PROT_ODU4</trib-protocol>
        <description>preset</description>
        <loopback-mode>FACILITY</loopback-mode>
      </state>
      <ethernet>
        <state>
          <out-block-errors>0</out-block-errors>
          <out-pcs-bip-errors>0</out-pcs-bip-errors>
          <in-block-errors>0</in-block-errors>
          <in-pcs-bip-errors>2</in-pcs-bip-errors>
        </state>
      </ethernet>
    </channel>
  </logical-channels>
</terminal-device>

```

Unconfiguration

Use the delete operation remove this configuration, as shown below:

```

<terminal-device xmlns="http://openconfig.net/yang/terminal-device">

```

```
<logical-channels>
  <channel>
    <index>393218</index>
    <config>
      <index>393218</index>
      <loopback-mode operation='delete' />
    </config>
  </channel>
</logical-channels>
</terminal-device>
```

Loopback-type on Network Interface

This configuration is used to configure loopback type on the network interface.

The two possible values are: FACILITY (shallow in NetConf mode) and TERMINAL (deep in NetConf mode).

Configuration

Configuration of deep mode at slot 6, Network interface 0, loopback-type to deep.

OpenConfig Netconf Payload

Here is a sample OpenConfig NetConf Payload to configure loopback type on the network interface.

```
<terminal-device xmlns="http://openconfig.net/yang/terminal-device">
  <logical-channels>
    <channel>
      <index>393472</index>
      <config>
        <index>393472</index>
        <loopback-mode>oc-opt-types:TERMINAL</loopback-mode>
      </config>
    </channel>
  </logical-channels>
</terminal-device>
```

OcNos CLI Command

The below CLI command is used to configure loopback type on the network interface.

```
OcNOS#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
OcNOS (config)#coherent-module 6
OcNOS (config-module)#network-interface 0
OcNOS (config-netif)#loopback-type deep
OcNOS (config-netif)#commit
```

OcNOS Netconf Payload

Here is a sample OcNOS NetConf Payload to configure loopback type on the network interface.

```
<terminal-device xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform-
terminal-device">
  <coherent-module>
    <slot-index>6</slot-index>
    <network-interfaces>
```

```

<interface>
  <net-index>0</net-index>
  <config>
    <net-index>0</net-index>
    <loopback-type>deep</loopback-type>
  </config>
</interface>
</network-interfaces>
</coherent-module>
</terminal-device>

```

Validation with Netconf get

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below

```

<filter type="subtree">
  <terminal-device xmlns="http://openconfig.net/yang/terminal-device">
    <logical-channels>
      <channel>
        <index>393472</index>
        <state/>
      </channel>
    </logical-channels>
  </terminal-device>
</filter>

```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for configuring loopback type on the network interface.

```

<terminal-device xmlns="http://openconfig.net/yang/terminal-device">
  <logical-channels>
    <channel xmlns:oc-opt-types="http://openconfig.net/yang/transport-types">
      <index>393472</index>
      <state>
        <index>393472</index>
        <admin-state>ENABLED</admin-state>
        <logical-channel-type>oc-opt-types:PROT_OTN</logical-channel-type>
        <trib-protocol>oc-opt-types:PROT_OTU4</trib-protocol>
        <description>preset</description>
        <loopback-mode>TERMINAL</loopback-mode>
      </state>
    <logical-channel-assignments>
      <assignment>
        <index>1</index>
        <state>
          <index>1</index>
          <assignment-type>OPTICAL_CHANNEL</assignment-type>
          <optical-channel>OCH-6/0</optical-channel>
        </state>
      </assignment>
    </logical-channel-assignments>
  </terminal-device>
  <otn>
    <state>

```

```
        <q-value>
          <instant>2.60</instant>
        </q-value>
        <fec-uncorrectable-blocks>0</fec-uncorrectable-blocks>
        <errored-blocks>0</errored-blocks>
      </state>
    </otn>
  </channel>
</logical-channels>
</terminal-device>
```

Unconfiguration

Use the delete operation to remove this configuration, as shown below:

```
<terminal-device xmlns="http://openconfig.net/yang/terminal-device">
  <logical-channels>
    <channel>
      <index>393472</index>
      <config>
        <index>393472</index>
        <loopback-mode operation='delete' />
      </config>
    </channel>
  </logical-channels>
</terminal-device>
```

Disable Coherent-Modules

Configuration

This configuration is used to disable coherent module 6.

OpenConfig Netconf Payload

Here is a sample NetConf Payload to disable coherent module 6.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>SLOT-6</name>
    <linecard xmlns="http://openconfig.net/yang/platform/linecard">
      <config>
        <power-admin-state>oc-platform-types:POWER_DISABLED</power-admin-state>
      </config>
    </linecard>
  </component>
</components>
```

OcNos CLI Command

The below CLI command is used to disable coherent module 6

```
OcNOS#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
OcNOS(config)#coherent-module 6
```

```
OcNOS (config-module) #disable
OcNOS (config-module) #commit
```

OcNOS Netconf Payload

Here is a sample NetConf Payload to disable coherent module 6.

```
<terminal-device xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform-
terminal-device">
  <coherent-module>
    <slot-index>6</slot-index>
    <config>
      <slot-index>6</slot-index>
      <service-enable operation='delete' />
    </config>
  </coherent-module>
</terminal-device>
```

Validation with Netconf get

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```
<filter >
  <components xmlns="http://openconfig.net/yang/platform">
<component>
  <name>SLOT-6</name>
  <linecard xmlns="http://openconfig.net/yang/platform/linecard">
<state>
</state>
  </linecard>
</component>
  </components>
</filter>
```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for disabling coherent module 6.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>SLOT-6</name>
    <linecard xmlns="http://openconfig.net/yang/platform/linecard">
      <state>
        <power-admin-state>POWER_DISABLED</power-admin-state>
        <slot-id>6</slot-id>
      </state>
    </linecard>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <name>SLOT-6</name>
      <equipment-failure xmlns="http://openconfig.net/yang/alarms">false</
equipment-failure>
      <temperature>
        <alarm-status>false</alarm-status>
      </temperature>
      <id>SLOT-6</id>
      <parent>CHASSIS</parent>
```

```

    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:INACTIVE</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>6</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://www.ipinfusion.com/
yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-types:LINECARD</type>
  </state>
  <subcomponents xmlns="http://openconfig.net/yang/platform">
    <subcomponent>
      <name>PORT-coherent-6</name>
      <state>
        <name>PORT-coherent-6</name>
      </state>
    </subcomponent>
    <subcomponent>
      <name>PORT-ce27</name>
      <state>
        <name>PORT-ce27</name>
      </state>
    </subcomponent>
    <subcomponent>
      <name>PORT-ce28</name>
      <state>
        <name>PORT-ce28</name>
      </state>
    </subcomponent>
  </subcomponents>
</component>
</components>

```

Operational-Mode

This XML configuration snippet is used to select the operational modes.

Each mode configures specific modulation-format, fec-mode, speed, and grid-spacing.

Configuration

Configure operational-mode 6 at slot 6, interface 0.

OpenConfig Netconf Payload

Here is a sample OpenConfig NetConf Payload to select the operational modes.

```

<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>OCH-6/0</name>
    <optical-channel xmlns="http://openconfig.net/yang/terminal-device">

```



```
<config>
  <operational-mode>6</operational-mode>
</config>
</optical-channel>
</component>
</components>
```

OcNos CLI Command

The below CLI command is used to select the operational modes.

```
OcNOS#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
OcNOS (config)#coherent-module 6
OcNOS (config-module)#network-interface 0
OcNOS (config-netif)#operational-mode 6
OcNOS (config-netif)#commit
OcNOS (config-netif)#
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to select the operational modes.

```
<terminal-device xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform-
terminal-device">
  <coherent-module>
    <slot-index>6</slot-index>
    <network-interfaces>
      <interface>
        <net-index>0</net-index>
        <config>
          <net-index>0</net-index>
          <operational-mode>6</operational-mode>
        </config>
      </interface>
    </network-interfaces>
  </coherent-module>
</terminal-device>
```

Validation with Netconf get

Get Openconfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```
<filter type="subtree">
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>OCH-6/0</name>
      <optical-channel xmlns="http://openconfig.net/yang/terminal-device">
        <state>
          <operational-mode/>
        </state>
      </optical-channel>
    </component>
  </components>
</filter>
```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for selecting the operational modes.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>OCH-6/0</name>
    <optical-channel xmlns="http://openconfig.net/yang/terminal-device">
      <state>
        <operational-mode>6</operational-mode>
      </state>
    </optical-channel>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>OCH-6/0</id>
      <name>OCH-6/0</name>
      <parent>PORT-coherent-6</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:INACTIVE</oper-status>
      <removable>false</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>0</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://www.ipinfusion.com/
yang/ocnos/ipi-oc-platform-types-deviations">oc-opt-types:OPTICAL_CHANNEL</
type>
    </state>
  </component>
</components>
```

Unconfiguration

Use the delete operation to remove this configuration, as shown below:

```
<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>OCH-6/0</name>
    <optical-channel xmlns="http://openconfig.net/yang/terminal-device">
      <config>
        <operational-mode operation='delete' />
      </config>
    </optical-channel>
  </component>
</components>
```

Restriction

The acceptable values range is 1-6.

Soft-tx-disable

This XML configuration snippet is used to disable the transmission of data on a network interface.

Configuration

Disable transmission of slot 6, network interface 0.

OpenConfig Netconf Payload

Here is a sample OpenConfig NetConf Payload to disable the transmission of data on a network interface.

```
<terminal-device xmlns="http://openconfig.net/yang/terminal-device">
  <logical-channels>
    <channel>
      <index>393472</index>
      <config>
        <index>393472</index>
        <admin-state>oc-opt-types:DISABLED</admin-state>
      </config>
    </channel>
  </logical-channels>
</terminal-device>
```

OcNos CLI Command

The below CLI command is used to disable the transmission of data on a network interface.

```
OcNOS#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
OcNOS (config)#coherent-module 6
OcNOS (config-module)#network-interface 0
OcNOS (config-netif)#soft-tx-disable
OcNOS (config-netif)#commit
OcNOS (config-netif)#
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to disable the transmission of data on a network interface.

```
<terminal-device xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform-
terminal-device">
  <coherent-module>
    <slot-index>6</slot-index>
    <network-interfaces>
      <interface>
        <net-index>0</net-index>
        <config>
          <net-index>0</net-index>
          <soft-tx-disable/>
        </config>
      </interface>
    </network-interfaces>
  </coherent-module>
</terminal-device>
```

Validation with Netconf get

Get Openconfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```
<filter type="subtree">
  <terminal-device xmlns="http://openconfig.net/yang/terminal-device">
    <logical-channels>
      <channel>
        <index>393472</index>
        <state>
          <admin-state/>
        </state>
      </channel>
    </logical-channels>
  </terminal-device>
</filter>
```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for disabling the transmission of data on a network interface.

```
<terminal-device xmlns="http://openconfig.net/yang/terminal-device">
  <logical-channels>
    <channel xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
      <index>393472</index>
      <state>
        <index>393472</index>
        <admin-state>DISABLED</admin-state>
        <logical-channel-type>oc-opt-types:PROT_OTN</logical-channel-type>
        <trib-protocol>oc-opt-types:PROT_OTU4</trib-protocol>
        <description>preset</description>
      </state>
      <logical-channel-assignments>
        <assignment>
          <index>1</index>
          <state>
            <index>1</index>
            <assignment-type>OPTICAL_CHANNEL</assignment-type>
            <optical-channel>OCH-6/0</optical-channel>
          </state>
        </assignment>
      </logical-channel-assignments>
    </channel>
  </logical-channels>
</terminal-device>
```

Unconfiguration

Use the delete operation to remove this configuration, as shown below:

```
<terminal-device xmlns="http://openconfig.net/yang/terminal-device">
  <logical-channels>
    <channel>
```

```

    <index>196864</index>
    <config>
      <index>196864</index>
      <admin-state operation='delete'>
    </config>
  </channel>
</logical-channels>
</terminal-device>

```

tx-laser-freq

This XML configuration snippet is used to set the laser frequency for a network interface in Hz, THz, GHz, and MHz.

Configuration

Configure the frequency 196100GHz at slot 6 network interface 0.

OpenConfig Netconf Payload

Here is a sample OpenConfig NetConf Payload to set the laser frequency for a network interface in Hz, THz, GHz, and MHz.

```

<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>OCH-6/0</name>
    <optical-channel xmlns="http://openconfig.net/yang/terminal-device">
      <config>
        <frequency>196100000.000000</frequency>
      </config>
    </optical-channel>
  </component>
</components>

```

OcNos CLI Command

Here is a sample CLI command used to set the laser frequency for a network interface.

```

OcNOS#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
OcNOS(config)#coherent-module 6
OcNOS(config-module)#network-interface 0
OcNOS(config-netif)#tx-laser-freq 196100000000000Hz
OcNOS(config-netif)#commit

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to set the laser frequency for a network interface.

```

<terminal-device xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform-
terminal-device">
  <coherent-module>
    <slot-index>6</slot-index>
    <network-interfaces>
      <interface>
        <net-index>0</net-index>
        <config>
          <net-index>0</net-index>

```

```

        <frequency>196100000.000000MHz</frequency>
      </config>
    </interface>
  </network-interfaces>
</coherent-module>
</terminal-device>

```

Validation with Netconf get

Get Openconfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```

<filter type="subtree">
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>OCH-6/0</name>
      <optical-channel xmlns="http://openconfig.net/yang/terminal-device">
        <state>
          <oper-status/>
        </state>
      </optical-channel>
    </component>
  </components>
</filter>

```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for setting the laser frequency for a network interface.

```

<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>OCH-6/0</name>
    <optical-channel xmlns="http://openconfig.net/yang/terminal-device">
      <state>
        <frequency xmlns:ipi-oc-terminal-device-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-terminal-device-deviations">191250000</
frequency>
        <line-port>PORT-coherent-6</line-port>
      </state>
    </optical-channel>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>OCH-6/0</id>
      <name>OCH-6/0</name>
      <parent>PORT-coherent-6</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:DISABLED</oper-status>
      <removable>false</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
    </state>
  </component>
</components>

```

```
    <location>0</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://www.ipinfusion.com/
yang/ocnos/ipi-oc-platform-types-deviations">oc-opt-types:OPTICAL_CHANNEL</
type>
  </state>
</component>
<component>
  <name>CFP-6</name>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <physical-channels>
      <channel>
        <index>1</index>
        <state>
          <index>1</index>
          <output-frequency xmlns:ipi-oc-platform-transceiver-
deviations="http://www.ipinfusion.com/yang/ocnos/ipi-oc-platform-transceiver-
deviations">191250000</output-frequency>
        </state>
      </channel>
    </physical-channels>
  </transceiver>
</component>
</components>
```

Unconfiguration

Use the delete operation to remove this configuration, as shown below:

```
<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>OCH-6/0</name>
    <optical-channel xmlns="http://openconfig.net/yang/terminal-device">
      <config>
        <frequency operation='delete' />
      </config>
    </optical-channel>
  </component>
</components>
```

Restriction

The permitted range is correlated to module brand.

tx-output-power

This XML configuration snippet is used to set the output power of the network interface in dBm.

Configuration

Configure tx-output-power to 1.0dBm at Slot 6, network-interface 0.

OpenConfig Netconf Payload

Here is a sample OpenConfig NetConf Payload to set the output power of the network interface in dBm.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>OCH-6/0</name>
    <optical-channel xmlns="http://openconfig.net/yang/terminal-device">
      <config>
        <target-output-power>1.0</target-output-power>
      </config>
    </optical-channel>
  </component>
</components>
```

OcNos CLI Command

The below CLI command is used to set the output power of the network interface in dBm.

```
OcNOS#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
OcNOS (config)#coherent-module 6
OcNOS (config-module)#network-interface 0
OcNOS (config-netif)#tx-output-power 1.00
OcNOS (config-netif)#commit
OcNOS (config-netif)#
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to set the output power of the network interface in dBm.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>OCH-6/0</name>
    <optical-channel xmlns="http://openconfig.net/yang/terminal-device">
      <config>
        <target-output-power>1.0</target-output-power>
      </config>
    </optical-channel>
  </component>
</components>
```

Validation with Netconf get

Get Openconfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```
<filter type="subtree">
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>OCH-6/0</name>
      <optical-channel xmlns="http://openconfig.net/yang/terminal-device">
        <state>
          <target-output-power/>
        </state>
      </optical-channel>
    </component>
  </components>
</filter>
```


Get OpenConfig Return

This validation response provides information on the configuration and runtime for setting the output power of the network interface in dBm.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>OCH-6/0</name>
    <optical-channel xmlns="http://openconfig.net/yang/terminal-device">
      <state>
        <target-output-power>1.00</target-output-power>
      </state>
    </optical-channel>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>OCH-6/0</id>
      <name>OCH-6/0</name>
      <parent>PORT-coherent-6</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:ACTIVE</oper-status>
      <removable>false</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>0</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://www.ipinfusion.com/
yang/ocnos/ipi-oc-platform-types-deviations">oc-opt-types:OPTICAL_CHANNEL</
type>
    </state>
  </component>
</components>
```

Unconfiguration

Use the delete operation to remove this configuration, as shown below:

```
<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>OCH-6/0</name>
    <optical-channel xmlns="http://openconfig.net/yang/terminal-device">
      <config>
        <target-output-power operation='delete' />
      </config>
    </optical-channel>
  </component>
</components>
```

ISIS OpenConfig Translation

General Restrictions

Operation create

- NETCONF's operation="create" is only supported at *objectlist* elements. For example: /network-instances/network-instance/protocols/protocol/isis/interfaces/interface[id]. Payloads with this operation on other elements have undefined behavior.

Deletion of AFI-SAFI

By default AF-IPv4 is always present on IS-IS global configuration and cannot be deleted. Deletion of this entry affects only its children configuration, if any. No error message is expected otherwise.

When deleting /oc-netinst:network-instances/network-instance/protocols/protocol/isis/global/afi-safi or /oc-netinst:network-instances/network-instance/protocols/protocol/isis/global/afi-safi/af, the following occurs:

- Operation="delete" will be placed at the supported attribute's nodes.
- If AF-IPv6 is configured, it will remove the entire element from af object-list.

Create IS-IS instance

This XML configuration snippet is used to configure an IS-IS instance.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure an IS-IS instance.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABC</name>
        <isis>
          <global>
            <afi-safi>
```

```
        <afi>
          <afi-name
            xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
          <safi-name
            xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
          <config>
            <afi-name
              xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
            <safi-name
              xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
            </config>
          </afi>
        </afi-safi>
      </global>
    </isis>
  </config>
  <identifier
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:ISIS</identifier>
    <name>ABC</name>
    <enabled>true</enabled>
  </config>
</protocol>
</protocols>
</network-instance>
</network-instances>
```

OcNOS CLI Command

The below CLI command is used to configure an IS-IS instance.

```
router isis ABC
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure an IS-IS instance.

```
<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <isis-instances>
    <isis-instance>
      <instance>ABC</instance>
      <config>
        <instance>ABC</instance>
        <vrf-name>default</vrf-name>
      </config>
    </isis-instance>
  </isis-instances>
</isis>
```

Restrictions

- An instance without AF-IPv4 support cannot be configured.

- AF-IPv4 cannot be deleted.
- Only safi-name UNICAST is supported.
- `operation="create"` is not supported on the *objectlist* `isis/global/afi-safi/af`.

Configure global parameters

This XML configuration snippet is used to configure the following IS-IS global parameters:

- *metric*
- *level-capability*
- *maximum-area-addresses*
- *net*

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS global parameters.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABC</name>
        <isis>
          <global>
            <afi-safi>
              <af>
                <afi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                <safi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                <config>
                  <afi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                  <safi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                  <metric>10</metric>
                </config>
              </af>
            </afi-safi>
          </global>
        </isis>
      </protocol>
    </protocols>
  </network-instance>
</network-instances>
```

```

        <level-capability>LEVEL_2</level-capability>
        <maximum-area-addresses>5</maximum-area-addresses>
        <net>49.0000.0000.0001.00</net>
    </config>
</global>
</isis>
<config>
  <identifier
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:ISIS</identifier>
    <name>ABC</name>
    <enabled>true</enabled>
  </config>
</protocol>
</protocols>
</network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI is used to configure IS-IS global parameters.

```

router isis ABC
 distance 10
 is-type level-2-only
 max-area-address 5
 net 49.0000.0000.0001.00

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS global parameters.

```

<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <isis-instances>
    <isis-instance>
      <instance>ABC</instance>
      <config>
        <instance>ABC</instance>
        <distance>10</distance>
        <vrf-name>default</vrf-name>
        <level-capability>level-2-only</level-capability>
        <maximum-area-addresses>5</maximum-area-addresses>
      </config>
      <network-entity-title>
        <config>
          <net>49.0000.0000.0001.00</net>
        </config>
      </network-entity-title>
    </isis-instance>
  </isis-instances>
</isis>

```

Restrictions

None

Configure level traffic-engineering

This XML configuration snippet is used to configure IS-IS level traffic-engineering.

Release

This configuration was introduced in OcNOS version 6.5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS level traffic-engineering.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:ISIS</identifier>
        <name>ABC</name>
        <isis>
          <levels >
            <level >
              <level-number>1</level-number>
              <config >
                <metric-style>WIDE_METRIC</metric-style>
                <level-number>1</level-number>
              </config>
              <traffic-engineering >
                <config>
                  <ipv4-router-id operation='delete' />
                  <enabled>true</enabled>
                </config>
              </traffic-engineering>
            </level>
            <level >
              <level-number>2</level-number>
              <config>
                <metric-style>WIDE_METRIC</metric-style>
                <level-number>2</level-number>
              </config>
              <traffic-engineering>
                <config>
                  <ipv4-router-id />
                  <enabled>true</enabled>
                </config>
              </traffic-engineering>
            </level>
          </levels>
        </isis>
      </config>
      <identifier xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:ISIS</identifier>
      <name>ABC</name>
```

```
        <enabled>true</enabled>
    </config>
</protocol>
</protocols>
</network-instance>
</network-instances>
```

OcNOS CLI Command

The below CLI command is used to configure IS-IS level traffic-engineering.

```
router isis ABC
mpls traffic-eng router-id 10.10.0.23

router isis ABC
mpls traffic-eng ipv6 router-id 10.10.0.23
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS level traffic-engineering.

```
<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <isis-instances>
    <isis-instance>
      <instance>ABC</instance>
      <config>
        <instance>ABC</instance>
        <vrf-name>default</vrf-name>
      </config>
      <metric>
        <style>wide</style>
        <level-number>level-1-2</level-number>
        <config>
          <style>wide</style>
          <level-number>level-1-2</level-number>
        </config>
      </metric>
      <traffic-engineering>
        <config>
          <ipv4-router-id>10.10.0.11</ipv4-router-id>
        </config>
      </traffic-engineering>
      <mpls-traffic-engg>
        <config>
          <enable-level-1 />
          <enable-level-2 />
        </config>
      </mpls-traffic-engg>
    </isis-instance>
  </isis-instances>
</isis>
```

Restrictions

- When configuring traffic-engineering on the OcNOS side, the router-id will be set up at both levels (level-1 and level-2) on the OpenConfig side.

- The configuration on the OpenConfig side must have the same router-ids for both levels.
- Deletion will only work if the router-ids for both levels are deleted.

Configure AF IPv6 support

This XML configuration snippet is used to configure IS-IS instance with IPv6 support.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS instance with IPv6 support.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
          <name>ABCv6</name>
          <isis>
            <global>
              <afi-safi>
                <af>
                  <afi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                    <safi-name
                      xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                      <config>
                        <afi-name
                          xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                          <safi-name
                            xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                            </config>
                        </af>
                      </af>
                    </afi-name>
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv6</afi-name>
                    <safi-name
                      xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                      <config>
                        <afi-name
                          xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv6</afi-name>
```



```
        <safi-name
            xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
        </config>
    </af>
</afi-safi>
</global>
</isis>
<config>
    <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:ISIS</identifier>
        <name>ABCV6</name>
        <enabled>true</enabled>
    </config>
</protocol>
</protocols>
</network-instance>
</network-instances>
```

OcNOS CLI Command

The below CLI command is used to configure IS-IS instance with IPv6 support.

```
router isis ABCV6
address-family ipv6
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS instance with IPv6 support.

```
<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <isis-instances>
    <isis-instance>
      <instance>ABCV6</instance>
      <config>
        <instance>ABCV6</instance>
        <vrf-name>default</vrf-name>
      </config>
      <address-family-ipv6>
        <config>
          <afi-name>ipv6</afi-name>
        </config>
      </address-family-ipv6>
    </isis-instance>
  </isis-instances>
</isis>
```

Restrictions

None

Configure metric parameter on AF IPv6

This XML configuration snippet is used to configure IS-IS global parameter *metric* on AF IPv6.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS global parameter *metric* on AF IPv6.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABCv6</name>
        <isis>
          <global>
            <afi-safi>
              <af>
                <afi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                <safi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                <config>
                  <afi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                  <safi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                  </config>
                </af>
              </af>
              <afi-name
                xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv6</afi-name>
              <safi-name
                xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
              <config>
                <afi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv6</afi-name>
                <safi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                <metric>20</metric>
```

```
        </config>
      </af>
    </afi-safi>
  </global>
</isis>
<config>
  <identifier
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:ISIS</identifier>
    <name>ABCv6</name>
    <enabled>true</enabled>
  </config>
</protocol>
</protocols>
</network-instance>
</network-instances>
```

OcNOS CLI Command

The below CLI command is used to configure IS-IS global parameter *metric* on AF IPv6.

```
router isis ABCv6
 address-family ipv6
   distance 20
 exit-address-family
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS global parameter *metric* on AF IPv6.

```
<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <isis-instances>
    <isis-instance>
      <instance>ABCv6</instance>
      <config>
        <instance>ABCv6</instance>
        <vrf-name>default</vrf-name>
      </config>
      <address-family-ipv6>
        <config>
          <afi-name>ipv6</afi-name>
          <administrative-distance>20</administrative-distance>
        </config>
      </address-family-ipv6>
    </isis-instance>
  </isis-instances>
</isis>
```

Restrictions

None

Configure Global Timers parameters

This XML configuration snippet is used to configure the following IS-IS global timers parameters:

- *lsp-refresh-interval*
- *lsp-lifetime-interval*
- *spf-first-interval*
- *spf-second-interval*
- *lsp-max-wait-interval*

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS global timers parameters.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABC</name>
        <isis>
          <global>
            <afi-safi>
              <af>
                <afi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                <safi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                <config>
                  <afi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                  <safi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                  </config>
                </af>
              </afi-safi>
            <timers>
              <config>
                <lsp-refresh-interval>1</lsp-refresh-interval>
                <lsp-lifetime-interval>350</lsp-lifetime-interval>
              </config>
            <spf>
```

```

        <config>
          <spf-first-interval>0</spf-first-interval>
          <spf-second-interval>2147483647</spf-second-interval>
        </config>
      </spf>
    <lsp-generation>
      <config>
        <lsp-max-wait-interval>40</lsp-max-wait-interval>
      </config>
    </lsp-generation>
  </timers>
</global>
</isis>
<config>
  <identifier
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:ISIS</identifier>
    <name>ABC</name>
    <enabled>true</enabled>
  </config>
</protocol>
</protocols>
</network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI command is used to configure IS-IS global timers parameters.

```

router isis ABC
  lsp-gen-interval 40
  lsp-refresh-interval 1
  max-lsp-lifetime 350
  spf-interval-exp 0 2147483647

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS global timers parameters.

```

<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <isis-instances>
    <isis-instance>
      <instance>ABC</instance>
      <config>
        <instance>ABC</instance>
        <vrf-name>default</vrf-name>
      </config>
      <timers>
        <config>
          <lsp-refresh-interval>1</lsp-refresh-interval>
          <lsp-lifetime-interval>350</lsp-lifetime-interval>
        </config>
      </timers>
      <spf-levels>
        <spf-level>
          <level>level-1-2</level>

```

```
<spf-delay>
  <spf-min-delay>0</spf-min-delay>
  <spf-max-delay>2147483647</spf-max-delay>
  <config>
    <spf-min-delay>0</spf-min-delay>
    <spf-max-delay>2147483647</spf-max-delay>
  </config>
</spf-delay>
<config>
  <level>level-1-2</level>
</config>
</spf-level>
</spf-levels>
<levels>
  <level>
    <type>level-1-2</type>
    <config>
      <type>level-1-2</type>
      <lsp-max-wait-interval>40</lsp-max-wait-interval>
    </config>
  </level>
</levels>
</isis-instance>
</isis-instances>
</isis>
```

Restrictions

The following timer parameters are supported only in OcNOS level-1-2.

- *spf-interval-exp*
- *max-lsp-lifetime*
- *lsp-max-wait-interval*

Configure Global Transport parameter

This XML configuration snippet is used to configure IS-IS global transport parameter *lsp-mtu-size*.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS global transport parameter *lsp-mtu-size*.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
```

```

        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABC</name>
        <isis>
        <global>
        <afi-safi>
        <af>
        <afi-name
        xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
        <safi-name
        xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
        <config>
        <afi-name
        xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
        <safi-name
        xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
        </config>
        </af>
        </afi-safi>
        <transport>
        <config>
        <lsp-mtu-size>600</lsp-mtu-size>
        </config>
        </transport>
        </global>
        </isis>
        <config>
        <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:ISIS</identifier>
        <name>ABC</name>
        <enabled>true</enabled>
        </config>
        </protocol>
        </protocols>
        </network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI command is used to configure IS-IS global transport parameter *lsp-mtu-size*.

```

router isis ABC
  lsp-mtu 600

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS global transport parameter *lsp-mtu-size*.

```

<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <isis-instances>
    <isis-instance>
      <instance>ABC</instance>
    </isis-instance>
  </isis-instances>
</isis>

```

```

<config>
  <instance>ABC</instance>
  <vrf-name>default</vrf-name>
</config>
<levels>
  <level>
    <type>level-1-2</type>
    <config>
      <type>level-1-2</type>
      <lsp-mtu-size>600</lsp-mtu-size>
    </config>
  </level>
</levels>
</isis-instance>
</isis-instances>
</isis>

```

Restrictions

The parameter *lsp-mtu-size* is only supported on OcNOS level-1-2.

Configure LSP-BIT parameter

This XML configuration snippet is used to configure IS-IS global parameter LSP-BIT's *set-bit* and *set-bit-on-boot*.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS global parameter LSP-BIT's *set-bit* and *set-bit-on-boot*.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABC</name>
        <isis>
          <global>
            <afi-safi>
              <af>
                <afi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                <safi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>

```



```

        <config>
        <afi-name
            xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
        <safi-name
            xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
        </config>
    </af>
</afi-safi>
<lsp-bit>
    <overload-bit>
        <config>
            <set-bit>true</set-bit>
            <set-bit-on-boot>true</set-bit-on-boot>
        </config>
        <reset-triggers>
            <reset-trigger>
                <reset-trigger
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:WAIT_FOR_BGP</reset-trigger>
                <config>
                    <reset-trigger
                        xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:WAIT_FOR_BGP</reset-trigger>
                    </config>
                </reset-trigger>
            </reset-triggers>
        </overload-bit>
    </lsp-bit>
</global>
</isis>
<config>
    <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:ISIS</identifier>
        <name>ABC</name>
        <enabled>true</enabled>
    </config>
</protocol>
</protocols>
</network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI command is used to configure IS-IS global parameter LSP-BIT's *set-bit* and *set-bit-on-boot*.

```

router isis ABC
    set-overload-bit on-startup wait-for-bgp

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS global parameter LSP-BIT's *set-bit* and *set-bit-on-boot*.

```

<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
    <isis-instances>

```

```

<isis-instance>
  <instance>ABC</instance>
  <config>
    <instance>ABC</instance>
    <vrf-name>default</vrf-name>
  </config>
  <lsp-over-load>
    <config>
      <enabled/>
      <set-bit-on-boot>wait-for-bgp</set-bit-on-boot>
    </config>
  </lsp-over-load>
</isis-instance>
</isis-instances>
</isis>

```

Restrictions

- When *set-bit-on-boot* is set, *reset-trigger* is always *oc-isis-types: WAIT_FOR_BGP*.
- *operation="create"* is not supported on *objectlist* *lsp-bit/overload-bit/reset-triggers/reset-trigger*.

Configure Inter-level Propagation Policies parameter

This XML configuration snippet is used to configure the following IS-IS inter-level propagation policies:

- *level1-to-level2*
- *level2-to-level1*

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS inter-level propagation policies.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABC</name>
        <isis>
          <global>
            <afi-safi>
              <af>
                <afi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>

```

```

        <safi-name
          xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
        <config>
          <afi-name
            xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPV4</afi-name>
            <safi-name
              xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
            </config>
          </af>
        </afi-safi>
        <inter-level-propagation-policies>
          <level1-to-level2>
            <config>
              <default-import-policy>ACCEPT_ROUTE</default-import-policy>
            </config>
          </level1-to-level2>
          <level2-to-level1>
            <config>
              <default-import-policy>ACCEPT_ROUTE</default-import-policy>
            </config>
          </level2-to-level1>
        </inter-level-propagation-policies>
      </global>
    </isis>
    <config>
      <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:ISIS</identifier>
      <name>ABC</name>
      <enabled>true</enabled>
    </config>
  </protocol>
</protocols>
</network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI command is used to configure IS-IS inter-level propagation policies.

```

router isis ABC
 redistribute isis level-1 into level-2
 redistribute isis level-2 into level-1

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS inter-level propagation policies.

```

<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <isis-instances>
    <isis-instance>
      <instance>ABC</instance>
      <config>
        <instance>ABC</instance>

```

```

    <vrf-name>default</vrf-name>
  </config>
<address-family-ipv4>
  <redistribute-level-1-into-2>
    <enable/>
  <config>
    <enable/>
  </config>
</redistribute-level-1-into-2>
<redistribute-level-2-into-1>
  <enable/>
  <config>
    <enable/>
  </config>
</redistribute-level-2-into-1>
</address-family-ipv4>
</isis-instance>
</isis-instances>
</isis>

```

Restrictions

None

Configure Graceful Restart parameter

This XML configuration snippet is used to configure IS-IS *graceful restart* parameter.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS *graceful restart* parameter.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABC</name>
        <isis>
          <global>
            <afi-safi>
              <afi>
                <afi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                <safi-name

```

```

        xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
        <config>
        <afi-name
types">oc-isis-types:IPV4</afi-name>
        <safi-name
types">oc-isis-types:UNICAST</safi-name>
        </config>
        </af>
        </afi-safi>
        <graceful-restart>
        <config>
        <enabled>>false</enabled>
        </config>
        </graceful-restart>
        </global>
    </isis>
    <config>
        <identifier
pol-types:ISIS</identifier>
        <name>ABC</name>
        <enabled>>true</enabled>
        </config>
    </protocol>
</protocols>
</network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI command is used to configure IS-IS *graceful restart* parameter.

```

router isis ABC
no capability restart graceful

```

OcNOS NetConf Payload

Here is a sample NetConf Payload to configure IS-IS *graceful restart* parameter.

```

<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <isis-instances>
    <isis-instance>
      <instance>ABC</instance>
      <config>
        <instance>ABC</instance>
        <vrf-name>default</vrf-name>
        <disable-gr-capability/>
      </config>
    </isis-instance>
  </isis-instances>
</isis>

```

Restrictions

- IS-IS *Graceful Restart* is enabled by default on OcNOS.

Configure Metric Style parameter

This XML configuration snippet is used to configure IS-IS *metric-style* parameter.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS *metric-style* parameter.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABC</name>
        <isis>
          <levels>
            <level>
              <level-number>1</level-number>
              <config>
                <metric-style>WIDE_METRIC</metric-style>
                <level-number>1</level-number>
              </config>
            </level>
          </levels>
        </global>
        <afi-safi>
          <af>
            <afi-name
              xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPV4</afi-name>
            <safi-name
              xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
            <config>
              <afi-name
                xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPV4</afi-name>
              <safi-name
                xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
            </config>
          </af>
        </afi-safi>
      </protocol>
    </protocols>
  </network-instance>
</network-instances>
```

```
    </global>
  </isis>
  <config>
    <identifier
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:ISIS</identifier>
      <name>ABC</name>
      <enabled>true</enabled>
    </config>
  </protocol>
</protocols>
</network-instance>
</network-instances>
```

OcNOS CLI Command

The below CLI command is used to configure IS-IS *metric-style* parameter.

```
router isis ABC
metric-style wide level-1
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS *metric-style* parameter.

```
<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <isis-instances>
    <isis-instance>
      <instance>ABC</instance>
      <metric>
        <style>wide</style>
        <level-number>level-1</level-number>
        <config>
          <style>wide</style>
          <level-number>level-1</level-number>
        </config>
      </metric>
    </isis-instance>
  </isis-instances>
</isis>
```

Restrictions

- When configuring *metric-style* parameter on both levels together, both the values must match.

Configure Authentication parameter

This XML configuration snippet is used to configure IS-IS instance *authentication*.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS instance *authentication*.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABC</name>
        <isis>
          <global>
            <afi-safi>
              <af>
                <afi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPV4</afi-name>
                <safi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                <config>
                  <afi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPV4</afi-name>
                  <safi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                  </config>
                </af>
              </afi-safi>
            </global>
            <levels>
              <level>
                <level-number>1</level-number>
                <authentication>
                  <config>
                    <auth-password>A-PWD</auth-password>
                  </config>
                </authentication>
                <config>
                  <level-number>1</level-number>
                </config>
              </level>
              <level>
                <level-number>2</level-number>
                <authentication>
                  <config>
                    <auth-password>D-PWD</auth-password>
                  </config>
                </authentication>
              </level>
            </levels>
          </isis>
        </protocol>
      </protocols>
    </network-instance>
  </network-instances>
```



```
        <config>
          <level-number>2</level-number>
        </config>
      </level>
    </levels>
  </isis>
  <config>
    <identifier
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:ISIS</identifier>
      <name>ABC</name>
      <enabled>true</enabled>
    </config>
  </protocol>
</protocols>
</network-instance>
</network-instances>
```

OcNOS CLI Command

The below CLI command is used to configure IS-IS instance *authentication*.

```
router isis ABC
  area-password A-PWD
  domain-password D-PWD
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS instance *authentication*.

```
<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <isis-instances>
    <isis-instance>
      <instance>ABC</instance>
      <config>
        <instance>ABC</instance>
        <vrf-name>default</vrf-name>
      </config>
      <area-authentication>
        <config>
          <area-password>A-PWD</area-password>
        </config>
      </area-authentication>
      <domain-authentication>
        <config>
          <domain-password>D-PWD</domain-password>
        </config>
      </domain-authentication>
    </isis-instance>
  </isis-instances>
</isis>
```

Restrictions

None

Configure Interface IS-IS Parameter

This XML configuration snippet is used to associate an interface to an IS-IS instance:

- *interface-id*
- *hello-padding*.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to associate an interface to an IS-IS instance.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABC</name>
        <isis>
          <interfaces>
            <interface>
              <interface-id>eth2</interface-id>
              <interface-ref>
                <config>
                  <interface>eth2</interface>
                </config>
              </interface-ref>
              <config>
                <interface-id>eth2</interface-id>
                <hello-padding>STRICT</hello-padding>
              </config>
              <afi-safi>
                <af>
                  <afi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                  <safi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                  <config>
                    <afi-name
                      xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                    <safi-name
                      xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                    </config>
                  </af>
                </afi-safi>
              </isis>
            </interfaces>
          </protocol>
        </protocols>
      </network-instance>
    </network-instances>
```

```
        </interface>
      </interfaces>
    </isis>
  </protocol>
</protocols>
</network-instance>
</network-instances>
```

OcNOS CLI Command

The below CLI command is used to associate an interface to an IS-IS instance.

```
interface eth2
ip address 22.22.22.10/24
ip router isis ABC
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to associate an interface to an IS-IS instance.

```
<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <interfaces>
    <interface>
      <name>eth2</name>
      <config>
        <name>eth2</name>
      </config>
      <interface-parameters>
        <config>
          <ipv4-instance-tag>ABC</ipv4-instance-tag>
        </config>
      </interface-parameters>
    </interface>
  </interfaces>
</isis>
```

Restrictions

- There is a deviation to make `oc-netinst:isis/interfaces/interface/afi-safi/af` mandatory when `oc-netinst:isis/interfaces/interface` is being configured.
- On OcNOS, IS-IS interface-related configuration can be applied even if the IS-IS instance is not yet created. In this case, edit operations using OpenConfig namespace will not work.

Configure Interface Authentication Parameter

This XML configuration snippet is used to configure IS-IS *interface authentication*.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS *interface authentication*.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
          <name>ABC</name>
          <isis>
            <interfaces>
              <interface>
                <interface-id>eth2</interface-id>
                <interface-ref>
                  <config>
                    <interface>eth2</interface>
                  </config>
                </interface-ref>
                <config>
                  <interface-id>eth2</interface-id>
                  <hello-padding>STRICT</hello-padding>
                </config>
                <afi-safi>
                  <afi>
                    <afi-name
                      xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                      <safi-name
                        xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                        <config>
                          <afi-name
                            xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                            <safi-name
                              xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                              </config>
                            </afi>
                          </afi-safi>
                        <levels>
                          <level>
                            <level-number>1</level-number>
                            <config>
                              <level-number>1</level-number>
                            </config>
                            <hello-authentication>
                              <config>
                                <auth-password>ABCDEFGHJIJ</auth-password>
                              </config>
                            </hello-authentication>
                          </level>
                        </levels>
                      </interface>
```

```
        </interfaces>
      </isis>
    </protocol>
  </protocols>
</network-instance>
</network-instances>
```

OcNOS CLI Command

The below CLI command is used to configure IS-IS *interface authentication*.

```
interface eth2
ip address 22.22.22.10/24
ip router isis ABC
isis password ABCDEFGHIJ level-1
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS *interface authentication*.

```
<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <interfaces>
    <interface>
      <name>eth2</name>
      <config>
        <name>eth2</name>
      </config>
      <interface-parameters>
        <config>
          <ipv4-instance-tag>ABC</ipv4-instance-tag>
        </config>
        <level-infos>
          <level-info>
            <level>level-1</level>
            <config>
              <level>level-1</level>
              <password>ABCDEFGHIJ</password>
            </config>
          </level-info>
        </level-infos>
      </interface-parameters>
    </interface>
  </interfaces>
</isis>
```

Restrictions

None

Configure Interface IGP-LDP-SYNC Parameter

This XML configuration snippet is used to configure IS-IS *igp-ldp-sync* parameter.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS *igp-ldp-sync* parameter.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABC</name>
        <isis>
          <interfaces>
            <interface>
              <interface-id>eth2</interface-id>
              <interface-ref>
                <config>
                  <interface>eth2</interface>
                </config>
              </interface-ref>
              <config>
                <interface-id>eth2</interface-id>
                <hello-padding>STRICT</hello-padding>
              </config>
              <afi-safi>
                <afi>
                  <afi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                  <safi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                  <config>
                    <afi-name
                      xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                    <safi-name
                      xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                    </config>
                  </afi>
                </afi-safi>
              <mpls>
                <igp-ldp-sync>
                  <config>
                    <enabled>true</enabled>
                  </config>
                </igp-ldp-sync>
              </mpls>
            </interface>
          </interfaces>
```

```
    </isis>
  </protocol>
</protocols>
</network-instance>
</network-instances>
```

OcNOS CLI Command

The below CLI command is used to configure IS-IS *igp-ldp-sync* parameter.

```
interface eth2
 mpls ldp-igp sync isis level-1-2
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS *igp-ldp-sync* parameter.

```
<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <interfaces>
    <interface>
      <name>eth2</name>
      <config>
        <name>eth2</name>
      </config>
      <interface-parameters>
        <config>
          <ipv4-instance-tag>ABC</ipv4-instance-tag>
        </config>
      </interface-parameters>
      <igp-ldp-sync>
        <config>
          <level>level-1-2</level>
          <hold-timer>70000</hold-timer>
        </config>
      </igp-ldp-sync>
    </interface>
  </interfaces>
</isis>
```

Restrictions

- When *igp-ldp-sync* is configured, OcNOS will use a default *hold-timer* value of 70000.
- This parameter is only supported on OcNOS level-1-2.

Configure Interface Circuit-type Parameter

This XML configuration snippet is used to configure IS-IS interface's *circuit-type* parameter.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS interface's *circuit-type* parameter.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
          <name>ABC</name>
          <isis>
            <interfaces>
              <interface>
                <interface-id>eth2</interface-id>
                <interface-ref>
                  <config>
                    <interface>eth2</interface>
                  </config>
                </interface-ref>
                <config>
                  <interface-id>eth2</interface-id>
                  <hello-padding>STRICT</hello-padding>
                  <circuit-type>POINT_TO_POINT</circuit-type>
                </config>
                <afi-safi>
                  <af>
                    <afi-name
                      xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPV4</afi-name>
                    <safi-name
                      xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                    <config>
                      <afi-name
                        xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPV4</afi-name>
                      <safi-name
                        xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                      </config>
                    </af>
                  </afi-safi>
                </interface>
              </interfaces>
            </isis>
          </protocol>
        </protocols>
      </network-instance>
    </network-instances>
```

OcNOS CLI Command

The below CLI command is used to configure IS-IS interface's *circuit-type* parameter.


```
interface eth2
  isis network point-to-point
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS interface's *circuit-type* parameter.

```
<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <interfaces>
    <interface>
      <name>eth2</name>
      <config>
        <name>eth2</name>
      </config>
      <interface-parameters>
        <config>
          <network-type>point-to-point</network-type>
          <ipv4-instance-tag>ABC</ipv4-instance-tag>
        </config>
      </interface-parameters>
    </interface>
  </interfaces>
</isis>
```

Restrictions

None

Configure Primary IP Address

This XML configuration snippet is used to configure IS-IS *hello-padding* parameter.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS *hello-padding* parameter.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABC</name>
      <isis>
        <interfaces>
          <interface>
            <interface-id>eth2</interface-id>
```

```

    <interface-ref>
      <config>
        <interface>eth2</interface>
      </config>
    </interface-ref>
  </config>
  <interface-id>eth2</interface-id>
  <hello-padding>DISABLE</hello-padding>
</config>
<afi-safi>
  <af>
    <afi-name
      xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPV4</afi-name>
    <safi-name
      xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
    <config>
      <afi-name
        xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPV4</afi-name>
      <safi-name
        xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
    </config>
  </af>
</afi-safi>
</interface>
</interfaces>
</isis>
</protocol>
</protocols>
</network-instance>

```

OcNOS CLI Command

The below CLI command is used to configure IS-IS *hello-padding* parameter.

```

interface eth2
  no isis hello padding

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS *hello-padding* parameter.

```

<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <interfaces>
    <interface>
      <name>eth2</name>
      <config>
        <name>eth2</name>
      </config>
      <interface-parameters>
        <config>
          <ipv4-instance-tag>ABC</ipv4-instance-tag>
          <disable-padding/>
        </config>
      </interface-parameters>
    </interface>
  </interfaces>
</isis>

```

```

    </interface-parameters>
  </interface>
</interfaces>
</isis>

```

Restrictions

- IS-IS *hello-padding* is enabled by default on OcNOS.
- Only OpenConfig's *DISABLE* value is supported.

Configure Interface Passive Parameter

This XML configuration snippet is used to configure IS-IS *passive* parameter.

Note: On OcNOS, this attribute is configured at the instance mode, whereas on OpenConfig, it's at interface.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS *passive* parameter.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABC</name>
        <isis>
          <interfaces>
            <interface>
              <interface-id>eth2</interface-id>
              <config>
                <interface-id>eth2</interface-id>
                <passive>true</passive>
                <hello-padding>STRICT</hello-padding>
              </config>
            <interface-ref>
              <config>
                <interface>eth2</interface>
              </config>
            </interface-ref>
          <afi-safi>
            <af>
              <afi-name
                xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
              <safi-name

```

```

        xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
        <config>
        <afi-name
        xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPV4</afi-name>
        <safi-name
        xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
        </config>
        </af>
        </afi-safi>
        </interface>
        </interfaces>
        </isis>
        </protocol>
        </protocols>
        </network-instance>
        </network-instances>

```

OcNOS CLI Command

The below CLI command is used to configure IS-IS *passive* parameter.

```

router isis ABC
  passive-interface eth2

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS *passive* parameter.

```

<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <isis-instances>
    <isis-instance>
      <instance>ABC</instance>
      <config>
        <instance>ABC</instance>
        <vrf-name>default</vrf-name>
      </config>
      <passive-interfaces>
        <passive-interface>
          <name>eth2</name>
          <config>
            <name>eth2</name>
          </config>
        </passive-interface>
      </passive-interfaces>
    </isis-instance>
  </isis-instances>
</isis>

```

Restrictions

None

Configure Interface IPv6 AF Parameter

This XML configuration snippet is used to configure IS-IS IPv6 support parameter.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS IPv6 support parameter.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABCV6</name>
        <isis>
          <interfaces>
            <interface>
              <interface-id>eth3</interface-id>
              <interface-ref>
                <config>
                  <interface>eth3</interface>
                </config>
              </interface-ref>
              <config>
                <interface-id>eth3</interface-id>
                <hello-padding>STRICT</hello-padding>
              </config>
              <afi-safi>
                <afi>
                  <afi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv6</afi-name>
                  <safi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                  <config>
                    <afi-name
                      xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv6</afi-name>
                    <safi-name
                      xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                    </config>
                  </afi>
                </afi-safi>
              </interface>
            </interfaces>
          </isis>
```

```
    </protocol>
  </protocols>
</network-instance>
</network-instances>
```

OcNOS CLI Command

The below CLI command is used to configure IS-IS IPv6 support parameter.

```
interface eth3
  ipv6 router isis ABCv6
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS IPv6 support parameter.

```
<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <interfaces>
    <interface>
      <name>eth3</name>
      <config>
        <name>eth3</name>
      </config>
      <interface-parameters>
        <config>
          <ipv6-instance-tag>ABCv6</ipv6-instance-tag>
        </config>
      </interface-parameters>
    </interface>
  </interfaces>
</isis>
```

Restrictions

None

Configure Interface BFD Parameter

This XML configuration snippet is used to configure IS-IS *enable-bfd* parameter.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS *enable-bfd* parameter.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
```

```

    <protocol>
      <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
      <name>ABC</name>
      <isis>
        <interfaces>
          <interface>
            <interface-id>eth2</interface-id>
            <interface-ref>
              <config>
                <interface>eth2</interface>
              </config>
            </interface-ref>
            <config>
              <interface-id>eth2</interface-id>
              <hello-padding>STRICT</hello-padding>
            </config>
            <afi-safi>
              <af>
                <afi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                <safi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                <config>
                  <afi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                  <safi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                  </config>
                </af>
              </afi-safi>
            <enable-bfd>
              <config>
                <enabled>true</enabled>
              </config>
            </enable-bfd>
          </interface>
        </interfaces>
      </isis>
    </protocol>
  </protocols>
</network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI command is used to configure IS-IS *enable-bfd* parameter.

```

interface eth2
  isis bfd

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS *enable-bfd* parameter.

```
<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <interfaces>
    <interface>
      <name>eth2</name>
      <config>
        <name>eth2</name>
      </config>
      <interface-parameters>
        <config>
          <ipv4-instance-tag>ABC</ipv4-instance-tag>
        </config>
        <bfd>
          <config>
            <enable/>
          </config>
        </bfd>
      </interface-parameters>
    </interface>
  </interfaces>
</isis>
```

Restrictions

None

Configure Interface Priority Parameter

This XML configuration snippet is used to configure IS-IS *priority* parameter.

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS *priority* parameter.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABC</name>
        <isis>
          <interfaces>
            <interface>
```



```

    <interface-id>eth2</interface-id>
    <interface-ref>
      <config>
        <interface>eth2</interface>
      </config>
    </interface-ref>
    <config>
      <interface-id>eth2</interface-id>
      <hello-padding>STRICT</hello-padding>
    </config>
    <afi-safi>
      <af>
        <afi-name
          xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
          <safi-name
            xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
            <config>
              <afi-name
                xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPv4</afi-name>
                <safi-name
                  xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                  </config>
                </af>
              </afi-safi>
            </levels>
          </interface>
        </interfaces>
      </isis>
    </protocol>
  </protocols>
</network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI command is used to configure IS-IS *priority* parameter.

```

interface eth2
  isis priority 50 level-1

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS *priority* parameter.

```

<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">

```

```
<interfaces>
  <interface>
    <name>eth2</name>
    <config>
      <name>eth2</name>
    </config>
    <interface-parameters>
      <config>
        <ipv4-instance-tag>ABC</ipv4-instance-tag>
      </config>
      <level-infos>
        <level-info>
          <level>level-1</level>
          <config>
            <level>level-1</level>
            <priority>50</priority>
          </config>
        </level-info>
      </level-infos>
    </interface-parameters>
  </interface>
</interfaces>
</isis>
```

Restrictions

- The OcNOS *level-1-2* value for level-info is not supported by OpenConfig.
 - `/isis/interfaces/interface/interface-parameters/level-infos/level-info`
- The XPath related to interfaces level-number below can only have values "1" or "2".
 1. `/oc-netinst:network-instances/network-instance[name]/protocols/protocol[identifier][name]/isis/interfaces/interface[interface-id]/levels/level[level-number]/level-number`
 2. `/oc-netinst:network-instances/network-instance[name]/protocols/protocol[identifier][name]/isis/interfaces/interface[interface-id]/levels/level[level-number]/config/level-number`

Configure Interface Timers Parameter

This XML configuration snippet is used to configure the following IS-IS parameters:

- *hello-interval*
- *hello-multiplier*

Release

This configuration was introduced in OcNOS version 6.4.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure IS-IS parameters *hello-interval* and *hello-multiplier*.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:ISIS</identifier>
        <name>ABC</name>
        <isis>
          <interfaces>
            <interface>
              <interface-id>eth2</interface-id>
              <interface-ref>
                <config>
                  <interface>eth2</interface>
                </config>
              </interface-ref>
              <config>
                <interface-id>eth2</interface-id>
                <hello-padding>STRICT</hello-padding>
              </config>
              <afi-safi>
                <afi>
                  <afi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPV4</afi-name>
                  <safi-name
                    xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                  <config>
                    <afi-name
                      xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:IPV4</afi-name>
                    <safi-name
                      xmlns:oc-isis-types="http://openconfig.net/yang/isis-
types">oc-isis-types:UNICAST</safi-name>
                    </config>
                  </afi>
                </afi-safi>
              <levels>
                <level>
                  <level-number>1</level-number>
                  <config>
                    <level-number>1</level-number>
                  </config>
                  <timers>
                    <config>
                      <hello-interval>1</hello-interval>
                    </config>
                  </timers>
                </level>
                <level>
                  <level-number>2</level-number>
                  <config>
                    <level-number>2</level-number>
                  </config>
                  <timers>

```

```

        <config>
          <hello-multiplier>2</hello-multiplier>
        </config>
      </timers>
    </level>
  </levels>
</interface>
</interfaces>
</isis>
</protocol>
</protocols>
</network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI command is used to configure IS-IS parameters *hello-interval* and *hello-multiplier*.

```

interface eth2
  isis hello-interval 1 level-1
  isis hello-multiplier 2 level-2

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure IS-IS parameters *hello-interval* and *hello-multiplier*.

```

<isis xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-isis">
  <interfaces>
    <interface>
      <name>eth2</name>
      <config>
        <name>eth2</name>
      </config>
      <interface-parameters>
        <config>
          <ipv4-instance-tag>ABC</ipv4-instance-tag>
        </config>
        <level-infos>
          <level-info>
            <level>level-1</level>
            <config>
              <level>level-1</level>
              <hello-interval>1</hello-interval>
            </config>
          </level-info>
          <level-info>
            <level>level-2</level>
            <config>
              <level>level-2</level>
              <hello-multiplier>2</hello-multiplier>
            </config>
          </level-info>
        </level-infos>
      </interface-parameters>
    </interface>
  </interfaces>

```

</isis>

Restrictions

- The OcNOS *level-1-2* value for level-info is not supported by OpenConfig.
 - `/isis/interfaces/interface/interface-parameters/level-infos/level-info`
- The XPath related to interfaces `level-number` below can only have values "1" or "2".
 1. `/oc-netinst:network-instances/network-instance[name]/protocols/protocol[identifier][name]/isis/interfaces/interface[interface-id]/levels/level[level-number]/level-number`
 2. `/oc-netinst:network-instances/network-instance[name]/protocols/protocol[identifier][name]/isis/interfaces/interface[interface-id]/levels/level[level-number]/config/level-number`

BGP OpenConfig Translation

Create BGP Instance

This XML configuration snippet is used to initiate a BGP process with the associated autonomous system number and router ID.

Release

This configuration was introduced in OcNOS version 4.2.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload for configuring a BGP process within a network instance. It sets the BGP autonomous system number (AS) and specifies the router ID.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">
        <identifier>oc-pol-types:BGP</identifier>
        <name>100</name>
        <config>
          <identifier>oc-pol-types:BGP</identifier>
          <name>100</name>
        </config>
        <bgp>
          <global>
            <config>
              <as>100</as>
              <router-id>1.2.3.4</router-id>
            </config>
          </global>
        </bgp>
      </protocol>
    </protocols>
  </network-instance>
</network-instances>
```

OcNOS CLI Command

The below CLI commands are used to configure a BGP process with the AS number and set the BGP router ID.

```
router bgp 100
bgp router-id 1.2.3.4
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload used to configure a network instance with the name and type. It also configures a BGP instance with an AS number and sets the BGP router ID.

```
<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-network-
instance">
  <network-instance>
    <instance-name>default</instance-name>
    <instance-type>vrf</instance-type>
    <config>
      <instance-name>default</instance-name>
      <instance-type>vrf</instance-type>
    </config>
    <vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vrf">
      <config>
        <vrf-name>default</vrf-name>
      </config>
    </vrf>
  </network-instance>
</network-instances>
<bgp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp">
  <bgp-instances>
    <bgp-instance>
      <bgp-as>100</bgp-as>
      <config>
        <bgp-as>100</bgp-as>
        <router-id>1.2.3.4</router-id>
      </config>
    </bgp-instance>
  </bgp-instances>
</bgp>
```

Validation with NetConf get

Here is a NetConf validation response that provides information about the enabled state and identifiers, as well as details about the BGP global configuration, including the AS number and router ID.

```
<network-instances xmlns="http://openconfig.net/yang/network-
instance">
  <network-instance>
    <name>default</name>
    <config>
      <name>default</name>
      <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
      </config>
      <state>
        <name>default</name>
        <type
          xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
        </state>
        <protocols>
          <protocol>
            <identifier
```

```

        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
        <name>DIRECTLY_CONNECTED</name>
        <config>
            <identifier
types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <enabled>true</enabled>
        </config>
        <state>
            <identifier
types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <enabled>true</enabled>
        </state>
    </protocol>
</protocol>
    <identifier
types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
    <name>100</name>
    <config>
        <identifier
types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
        <name>100</name>
        <enabled>true</enabled>
    </config>
    <bgp>
        <global>
            <config>
                <as>100</as>
                <router-id>1.2.3.4</router-id>
            </config>
            <state>
                <as>100</as>
            </state>
        </global>
        <state>
            <router-id>1.2.3.4</router-id>
        </state>
    </global>
</global>
</bgp>
<state>
    <enabled>true</enabled>
    <identifier
types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
    <name>100</name>
</state>
</protocol>
</protocols>
</network-instance>
</network-instances>

```


Restrictions

Address families supported:

The OpenConfig datamodel does not support all the address-family types that OcNOS datamodel contains. The address-family values are defined on identity `AFI_SAFI_TYPE` on [OpenConfig file public/release/models/bgp/openconfig-bgp-types.yang at master · openconfig/public](#).

The table below shows all the address-family types that are supported. The address-family types that are not listed are translated as “UNDEFINED” on NETCONF GET/SET operations.

OcNOS Address-family type	OpenConfig Address-family type
ipv4_unicast	IPV4_UNICAST
ipv4_multicast	IPV4_MULTICAST
ipv4_labeled-unicast	IPV4_LABELED_UNICAST
ipv4_vpn-unicast	L3VPN_IPV4_UNICAST
ipv6_unicast	IPV6_UNICAST
ipv6_labeled-unicast	IPV6_LABELED_UNICAST
ipv6_vpn-unicast	L3VPN_IPV6_UNICAST
l2vpn_evpn	L2VPN_EVPN
link-state_link-state	LINKSTATE

BGP naming rule:

For BGP instances, the leaf `/network-instances/network-instance/protocols/protocol/name` must have the same number of the `/network-instances/network-instance/protocols/protocol/bgp/global/config/as`.

Create BGP Global with default VRF

This XML configuration snippet is used to set up BGP Global configuration with default VRF data from the OpenConfig perspective.

Ensure that the **AFI-SAFI** container is present in the applied configuration to facilitate the configuration of address families.

Release

This configuration was introduced in OcNOS version 6.2.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload to define BGP settings for the default network instance, including global BGP parameters, neighbor configurations, and address family tables.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <config>
      <name>default</name>
      <type
```

```

    xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
  </config>
  <protocols>
    <protocol>
      <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</identifier>
        <name>DIRECTLY_CONNECTED</name>
        <config>
          <identifier
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <enabled>true</enabled>
          </config>
        </protocol>
      </protocol>
      <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
        <name>100</name>
        <bgp>
          <global>
            <afi-safis>
              <afi-safi>
                <afi-safi-name
                  xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                  <config>
                    <afi-safi-name
                      xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                      <enabled>true</enabled>
                    </config>
                    <add-paths>
                      <config>
                        <receive>true</receive>
                        <send>true</send>
                        <send-max>2</send-max>
                      </config>
                    </add-paths>
                    <use-multiple-paths>
                      <ibgp>
                        <config>
                          <maximum-paths>7</maximum-paths>
                        </config>
                      </ibgp>
                    </use-multiple-paths>
                  </afi-safi>
                </afi-safis>
              <confederation>
                <config>
                  <member-as>48</member-as>
                  <identifier>600</identifier>
                </config>
              </confederation>
            </global>
          </bgp>
        </protocol>
      </config>
    </protocols>
  </config>

```

```

        <as>100</as>
        <router-id>1.2.3.4</router-id>
    </config>
    <route-selection-options>
        <config>
            <enable-aigp>false</enable-aigp>
            <ignore-as-path-length>true</ignore-as-path-length>
            <external-compare-router-id>true</external-compare-router-id>
        </config>
    </route-selection-options>
    <graceful-restart>
        <config>
            <restart-time>100</restart-time>
            <stale-routes-time>300.00</stale-routes-time>
            <helper-only>false</helper-only>
        </config>
    </graceful-restart>
</global>
<neighbors>
    <neighbor>
        <neighbor-address>10.1.1.2</neighbor-address>
        <afi-safis>
            <afi-safi>
                <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                <config>
                    <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                    <enabled>true</enabled>
                </config>
            </afi-safi>
        </afi-safis>
        <config>
            <enabled>true</enabled>
            <neighbor-address>10.1.1.2</neighbor-address>
            <peer-as>100</peer-as>
        </config>
    </neighbor>
</neighbors>
</bgp>
<config>
    <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
        <name>100</name>
        <enabled>true</enabled>
    </config>
</protocol>
</protocols>
<tables>
    <table>
        <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
            <address-family

```

```

        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        <config>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        </config>
        </table>
        <table>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        <config>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        </config>
        </table>
        <table>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        <config>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        </config>
        </table>
        </tables>
        </network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI commands are used to configure BGP settings for a specified AS number on a networking device. They define critical attributes of the BGP process, including the router ID, confederation settings, best path selection criteria, graceful restart behavior, and neighbor configuration. Additionally, the commands enable support for IPv4 unicast address families and specify advanced options like additional path handling and maximum path selection for internal BGP peers. The neighbor statement establishes a BGP neighbor relationship with an adjacent router using the IP address and assigns it to a specified AS number.

```

router bgp 100
  bgp router-id 1.2.3.4

```

```

bgp confederation identifier 600
bgp confederation peers 48
bgp bestpath as-path ignore
bgp bestpath aigp ignore
bgp bestpath compare-routerid
bgp graceful-restart restart-time 100
bgp graceful-restart stalepath-time 300
bgp graceful-restart graceful-reset
neighbor 10.1.1.2 remote-as 100
!
address-family ipv4 unicast
bgp additional-paths send-receive
bgp additional-paths select best 2
max-paths ibgp 7
neighbor 10.1.1.2 activate
exit-address-family
!

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload for configuring BGP settings on a network device. It defines a BGP instance with AS number and sets its router ID, graceful restart parameters, route selection options, and address family settings. Specifically, it configures BGP to operate with IPv4 unicast address families, allowing for the exchange of IPv4 unicast routing information. Additionally, the payload specifies additional path handling, maximum path selection for internal BGP peers, and establishes a BGP neighbor relationship with an adjacent router using the IP address.

```

<bgp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp">
  <bgp-instances>
    <bgp-instance>
      <bgp-as>100</bgp-as>
      <config>
        <bgp-as>100</bgp-as>
        <router-id>1.2.3.4</router-id>
        <ignore-aigp-for-bestpath />
      </config>
      <graceful-restart>
        <config>
          <restart-time>100</restart-time>
          <stale-path-max-retention-time>300</stale-path-max-
retention-time>
          <graceful-reset />
        </config>
      </graceful-restart>
      <route-selection>
        <config>
          <ignore-as-path-length />
          <external-compare-router-id />
        </config>
      </route-selection>
      <address-families>
        <address-family>
          <afi>ipv4</afi>
          <safi>unicast</safi>
          <config>
            <afi>ipv4</afi>
            <safi>unicast</safi>

```

```

                                <additional-paths-best-select-count>2</additional-
paths-best-select-count>
                                <additional-paths-mode>receive send</additional-paths-
mode>
                                </config>
                                <maximum-paths>
                                  <config>
                                    <ibgp-max-path>7</ibgp-max-path>
                                  </config>
                                </maximum-paths>
                              </address-family>
        </address-families>
        <peers>
          <peer>
            <peer-address>10.1.1.2</peer-address>
            <address-families>
              <address-family>
                <afi>ipv4</afi>
                <safi>unicast</safi>
                <config>
                  <afi>ipv4</afi>
                  <safi>unicast</safi>
                  <activate />
                </config>
              </address-family>
            </address-families>
            <config>
              <confederation-identifier>600</confederation-
identifier>
              <peer-address>10.1.1.2</peer-address>
              <peer-as>100</peer-as>
              <peer-as-number>48</peer-as-number>
            </config>
          </peer>
        </peers>
      </bgp-instance>
    </bgp-instances>
  </bgp>

```

Validation with NetConf get

Here is a NetConf validation response indicates the successful validation of a network configuration specified in a NetConf payload. In this specific response, it verifies the correctness of the configuration for a specified network instance with associated protocols and interfaces. The validation ensures that the configuration adheres to the defined network instance types, policy types, and address families. All relevant elements, such as the BGP instance, its parameters, and the associated interfaces, are validated against the specified OpenConfig model.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <config>
      <name>default</name>
      <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
      </config>
      <state>

```

```

    <name>default</name>
    <type
      xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
    </state>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</identifier>
          <name>DIRECTLY_CONNECTED</name>
          <config>
            <identifier
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
              <name>DIRECTLY_CONNECTED</name>
              <enabled>true</enabled>
            </config>
          </state>
          <identifier
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <enabled>true</enabled>
          </state>
        </protocol>
      </protocol>
      <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
        <name>100</name>
        <bgp>
          <global>
            <afi-safis>
              <afi-safi>
                <afi-safi-name
                  xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                  <config>
                    <afi-safi-name
                      xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                      <enabled>true</enabled>
                    </config>
                  </state>
                  <afi-safi-name
                    xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                    <enabled>true</enabled>
                  </state>
                  <add-paths>
                    <config>
                      <receive>true</receive>
                      <send>true</send>
                      <send-max>2</send-max>
                    </config>
                  </state>
                  <receive>true</receive>
                </afi-safi-name>
              </afi-safi>
            </afi-safis>
          </global>
        </bgp>
      </identifier>
    </protocols>
  </state>
</config>

```

```
        <send>true</send>
        <send-max>2</send-max>
    </state>
</add-paths>
<use-multiple-paths>
    <ibgp>
        <config>
            <maximum-paths>7</maximum-paths>
        </config>
        <state>
            <maximum-paths>7</maximum-paths>
        </state>
    </ibgp>
</use-multiple-paths>
</afi-safi>
</afi-safis>
<confederation>
    <config>
        <member-as>48</member-as>
        <identifier>600</identifier>
    </config>
    <state>
        <member-as>48</member-as>
        <identifier>600</identifier>
    </state>
</confederation>
<config>
    <as>100</as>
    <router-id>1.2.3.4</router-id>
</config>
<route-selection-options>
    <config>
        <enable-aigp>false</enable-aigp>
        <ignore-as-path-length>true</ignore-as-path-length>
        <external-compare-router-id>true</external-compare-router-id>
    </config>
    <state>
        <enable-aigp>false</enable-aigp>
        <ignore-as-path-length>true</ignore-as-path-length>
        <external-compare-router-id>true</external-compare-router-id>
    </state>
</route-selection-options>
<state>
    <as>100</as>
    <router-id>1.2.3.4</router-id>
    <total-prefixes>0</total-prefixes>
</state>
<graceful-restart>
    <config>
        <restart-time>100</restart-time>
        <stale-routes-time>300.00</stale-routes-time>
        <helper-only>false</helper-only>
    </config>
    <state>
        <restart-time>100</restart-time>
        <stale-routes-time>300.00</stale-routes-time>
        <helper-only>false</helper-only>
```



```

        </state>
    </graceful-restart>
</global>
<neighbors>
    <neighbor>
        <neighbor-address>10.1.1.2</neighbor-address>
        <afi-safis>
            <afi-safi>
                <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                <config>
                    <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                    <enabled>true</enabled>
                </config>
                <state>
                    <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                    <enabled>true</enabled>
                </state>
            </afi-safi>
        </afi-safis>
    </neighbor>
    <neighbor>
        <neighbor-address>10.1.1.2</neighbor-address>
        <peer-as>100</peer-as>
        <config>
            <enabled>true</enabled>
            <neighbor-address>10.1.1.2</neighbor-address>
            <peer-as>100</peer-as>
        </config>
        <state>
            <enabled>true</enabled>
            <neighbor-address>10.1.1.2</neighbor-address>
            <peer-as>100</peer-as>
        </state>
    </neighbor>
</neighbors>
</bgp>
<config>
    <identifier
types">oc-pol-types:BGP</identifier>
        <name>100</name>
        <enabled>true</enabled>
    </config>
    <state>
        <enabled>true</enabled>
        <identifier
types">oc-pol-types:BGP</identifier>
        <name>100</name>
    </state>
</protocol>
</protocols>
<tables>
    <table>
        <protocol

```

```

        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        <config>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        </config>
        <state>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        </state>
        </table>
        <table>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        <config>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        </config>
        <state>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        </state>
        </table>
        <table>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        <config>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>

```

```
</config>
<state>
  <protocol
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
    <address-family
      xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
    </state>
  </table>
</tables>
<interfaces>
  <interface>
    <id>eth0</id>
    <config>
      <id>eth0</id>
      <interface>eth0</interface>
    </config>
  </interface>
  <interface>
    <id>eth1</id>
    <config>
      <id>eth1</id>
      <interface>eth1</interface>
    </config>
  </interface>
  <interface>
    <id>eth2</id>
    <config>
      <id>eth2</id>
      <interface>eth2</interface>
    </config>
  </interface>
  <interface>
    <id>eth3</id>
    <config>
      <id>eth3</id>
      <interface>eth3</interface>
    </config>
  </interface>
  <interface>
    <id>eth4</id>
    <config>
      <id>eth4</id>
      <interface>eth4</interface>
    </config>
  </interface>
  <interface>
    <id>eth5</id>
    <config>
      <id>eth5</id>
      <interface>eth5</interface>
    </config>
  </interface>
  <interface>
    <id>eth6</id>
    <config>
```

```

        <id>eth6</id>
        <interface>eth6</interface>
    </config>
</interface>
<interface>
    <id>eth7</id>
    <config>
        <id>eth7</id>
        <interface>eth7</interface>
    </config>
</interface>
<interface>
    <id>eth8</id>
    <config>
        <id>eth8</id>
        <interface>eth8</interface>
    </config>
</interface>
<interface>
    <id>lo</id>
    <config>
        <id>lo</id>
        <interface>lo</interface>
    </config>
</interface>
</interfaces>
</network-instance>
</network-instances>

```

Restrictions

- On the first time `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global` paths are configured, those configuration need that respective **AFI-SAFI** configuration must be present to indicate **AFI** type:

```
/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global/afi-safis
```

This information is necessary for the OcNOS model to generate the following paths:

```
/ipi-bgp:bgp/bgpp-instances/bgpp-instance/address-families
```

```
/ipi-bgp:bgp/bgpp-instances/bgpp-instance/peer-groups/peer-group/address-families
```

```
/ipi-bgp:bgp/bgpp-instances/bgpp-instance/address-family-vrfs
```

- After the `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global` paths are configured on equipment, on the further configurations on those paths the user does not need to indicate the **AFI-SAFI**, the translation will look for this information on the equipment database.
- For multiple paths configuration, the Open Config path `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global/use-multiple-paths` is not support, all the multiple paths configurations are done on Open Config path `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global/afi-safis/afi-safi/use-multiple-paths`. This is because the OcNOS datamodel only handle multiple paths is one place.
- The containers `graceful-restart` and `route-selection-options` are configurable only by `network-instance` instance named "default".
- The Open Config attributes:

```

/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global/
graceful-restart/state/helper-only

/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global/route-
selection-options/config/enable-aigp

```

Have their logic inverted, so a "false" value on open-config means a "true" value on OcNOS datamodel.

Create BGP Global with User-defined VRFs

This XML configuration snippet uses the payloads provided in this section to configure BGP Global with user-defined VRF data from the Open Config perspective.

The AFI-SAFI container must be available on the configuration applied to help configure address-families.

Release

This configuration was introduced in OcNOS version 6.2.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload used to configure network instances with BGP Global settings. This payload includes configuration for both the `default` network instance and a custom network instance named `red`.

In the `default` instance, BGP Global settings such as the AS number, router ID, route selection options, and graceful restart parameters are configured.

In the `red` network instance, in addition to the common BGP Global settings, specific **AFI-SAFI** settings are configured, including the number of maximum paths for both eBGP and iBGP. This example demonstrates how the payload can be adapted to configure different network instances with unique BGP configurations.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <config>
      <name>default</name>
      <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
      </config>
      <protocols>
        <protocol>
          <identifier
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</identifier>
          <name>DIRECTLY_CONNECTED</name>
          <config>
            <identifier
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <enabled>true</enabled>
          </config>
        </protocol>
        <protocol>
          <identifier

```

```

        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
    <name>100</name>
    <bgp>
        <global>
            <config>
                <as>100</as>
                <router-id>1.2.3.4</router-id>
            </config>
            <route-selection-options>
                <config>
                    <enable-aigp>false</enable-aigp>
                    <ignore-as-path-length>true</ignore-as-path-length>
                    <external-compare-router-id>true</external-compare-router-id>
                </config>
            </route-selection-options>
            <graceful-restart>
                <config>
                    <restart-time>100</restart-time>
                    <stale-routes-time>300.00</stale-routes-time>
                    <helper-only>false</helper-only>
                </config>
            </graceful-restart>
        </global>
    </bgp>
    <config>
        <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
        <name>100</name>
        <enabled>true</enabled>
        </config>
    </protocol>
</protocols>
</network-instance>
<network-instance>
    <name>red</name>
    <config>
        <name>red</name>
        <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
        <route-distinguisher>100:200</route-distinguisher>
    </config>
    <protocols>
        <protocol>
            <identifier
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <config>
                <identifier
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
                <name>DIRECTLY_CONNECTED</name>
                <enabled>true</enabled>
            </config>
        </protocol>

```

```

    <protocol>
      <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
      <name>100</name>
      <bgp>
        <global>
          <config>
            <as>100</as>
            <router-id>1.2.3.4</router-id>
          </config>
          <afi-safis>
            <afi-safi>
              <afi-safi-name
                xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
              <config>
                <afi-safi-name
                  xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                <enabled>true</enabled>
              </config>
              <use-multiple-paths>
                <ebgp>
                  <config>
                    <maximum-paths>10</maximum-paths>
                  </config>
                </ebgp>
                <ibgp>
                  <config>
                    <maximum-paths>15</maximum-paths>
                  </config>
                </ibgp>
              </use-multiple-paths>
            </afi-safi>
          </afi-safis>
          <confederation>
            <config>
              <member-as>48</member-as>
              <identifier>600</identifier>
            </config>
          </confederation>
        </global>
      </bgp>
    </config>
    <identifier
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
    <name>100</name>
    <enabled>true</enabled>
  </config>
</protocol>
</protocols>
</network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI commands are used to configure an IP VRF with a route distinguisher. In addition, the router BGP is configured with various BGP settings, including router ID, bestpath options, graceful restart parameters, and confederation settings. Inside the address-family IPv4 VRF context, the maximum paths for eBGP and iBGP are set. The BGP confederation is also configured with an identifier and peers.

```
ip vrf red
rd 100:200
!
router bgp 100
  bgp router-id 1.2.3.4
  bgp bestpath as-path ignore
  bgp bestpath aigp ignore
  bgp bestpath compare-routerid
  bgp graceful-restart restart-time 100
  bgp graceful-restart stalepath-time 300
  bgp graceful-restart graceful-reset
  !
  address-family ipv4 vrf red
  max-paths ebgp 10
  max-paths ibgp 15
  bgp confederation identifier 600
  bgp confederation peers 48
  exit-address-family
!
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure a BGP instance with AS number, a router ID, and settings to ignore AIGP for bestpath selection. It also includes graceful restart parameters with a restart time and a stale path max retention time. Additionally, the payload configures route selection options to ignore AS path length and perform external comparisons based on router IDs. Inside the address-family VRF context for IPv4 unicast, it sets the confederation identifier and the peer AS number. Maximum path settings are configured for both eBGP and iBGP paths.

```
<bgp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp">
  <bgp-instances>
    <bgp-instance>
      <bgp-as>100</bgp-as>
      <config>
        <bgp-as>100</bgp-as>
        <router-id>1.2.3.4</router-id>
        <ignore-aigp-for-bestpath />
      </config>
      <graceful-restart>
        <config>
          <restart-time>100</restart-time>
          <stale-path-max-retention-time>300</stale-path-max-
retention-time>
          <graceful-reset />
        </config>
      </graceful-restart>
      <route-selection>
        <config>
          <ignore-as-path-length />

```



```

        <external-compare-router-id />
    </config>
</route-selection>
<address-family-vrfs>
    <address-family-vrf>
        <afi>ipv4</afi>
        <safi>unicast</safi>
        <vrf-name>red</vrf-name>
        <confederation>
            <identifier>600</identifier>
            <peer-as-number>48</peer-as-number>
        </confederation>
        <config>
            <afi>ipv4</afi>
            <safi>unicast</safi>
            <vrf-name>red</vrf-name>
        </config>
        <maximum-paths>
            <config>
                <ebgp-max-path>10</ebgp-max-path>
                <ibgp-max-path>15</ibgp-max-path>
            </config>
        </maximum-paths>
    </address-family-vrf>
</address-family-vrfs>
</bgp-instance>
</bgp-instances>
</bgp>

```

Validation with NetConf get

Here is a NetConf validation response for configuring settings for the default network instance and a network instance. It also includes configurations for protocols, under network instances. Additionally, there are table configurations for IPv4 and IPv6 address families.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
    <network-instance>
        <name>default</name>
        <config>
            <name>default</name>
            <type
                xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
            </config>
            <state>
                <name>default</name>
                <type
                    xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
                </state>
            <protocols>
                <protocol>
                    <identifier
                        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</identifier>
                    <name>DIRECTLY_CONNECTED</name>
                    <config>

```

```

        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
        <name>DIRECTLY_CONNECTED</name>
        <enabled>true</enabled>
      </config>
    <state>
      <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
      <name>DIRECTLY_CONNECTED</name>
      <enabled>true</enabled>
    </state>
  </protocol>
</protocol>
  <identifier
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
  <name>100</name>
  <bgp>
    <global>
      <config>
        <as>100</as>
        <router-id>1.2.3.4</router-id>
      </config>
      <route-selection-options>
        <config>
          <enable-aigp>false</enable-aigp>
          <ignore-as-path-length>true</ignore-as-path-length>
          <external-compare-router-id>true</external-compare-router-id>
        </config>
        <state>
          <enable-aigp>false</enable-aigp>
          <ignore-as-path-length>true</ignore-as-path-length>
          <external-compare-router-id>true</external-compare-router-id>
        </state>
      </route-selection-options>
      <state>
        <as>100</as>
        <router-id>1.2.3.4</router-id>
        <total-prefixes>0</total-prefixes>
      </state>
      <graceful-restart>
        <config>
          <restart-time>100</restart-time>
          <stale-routes-time>300.00</stale-routes-time>
          <helper-only>false</helper-only>
        </config>
        <state>
          <restart-time>100</restart-time>
          <stale-routes-time>300.00</stale-routes-time>
          <helper-only>false</helper-only>
        </state>
      </graceful-restart>
    </global>
  </bgp>
</config>

```

```

        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
        <name>100</name>
        <enabled>true</enabled>
      </config>
    <state>
      <enabled>true</enabled>
      <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
      <name>100</name>
    </state>
  </protocol>
</protocols>
<tables>
  <table>
    <protocol
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
    <address-family
      xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
    <config>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
      <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
      </config>
    <state>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
      <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
      </state>
    </table>
  </table>
  <table>
    <protocol
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
    <address-family
      xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
    <config>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
      <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
      </config>
    <state>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>

```

```

        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        </state>
      </table>
      <table>
        <protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>
          <address-family
            xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
            <config>
              <protocol
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
                <address-family
                  xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                  </config>
                </table>
              </tables>
            </network-instance>
            <network-instance>
              <name>red</name>
              <config>
                <name>red</name>
                <type
                  xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
                  <route-distinguisher>100:200</route-distinguisher>
                </config>
                <state>
                  <name>red</name>
                  <type
                    xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
                    <route-distinguisher>100:200</route-distinguisher>
                  </state>
                <protocols>
                  <protocol>
                    <identifier
                      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</identifier>
                      <name>DIRECTLY_CONNECTED</name>
                      <config>
                        <identifier
                          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
                          <name>DIRECTLY_CONNECTED</name>
                          <enabled>true</enabled>
                        </config>
                      <state>
                        <identifier
                          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
                          <name>DIRECTLY_CONNECTED</name>
                          <enabled>true</enabled>

```

```

    </state>
  </protocol>
</protocol>
  <identifier
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
    <name>100</name>
    <bgp>
      <global>
        <config>
          <as>100</as>
          <router-id>1.2.3.4</router-id>
        </config>
        <afi-safis>
          <afi-safi>
            <afi-safi-name
              xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
              <config>
                <afi-safi-name
                  xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                  <enabled>true</enabled>
                </config>
                <state>
                  <afi-safi-name
                    xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                  </state>
                  <use-multiple-paths>
                    <ebgp>
                      <config>
                        <maximum-paths>10</maximum-paths>
                      </config>
                      <state>
                        <maximum-paths>10</maximum-paths>
                      </state>
                    </ebgp>
                    <ibgp>
                      <config>
                        <maximum-paths>15</maximum-paths>
                      </config>
                      <state>
                        <maximum-paths>15</maximum-paths>
                      </state>
                    </ibgp>
                  </use-multiple-paths>
                </afi-safi>
              </afi-safis>
            <confederation>
              <config>
                <member-as>48</member-as>
                <identifier>600</identifier>
              </config>
              <state>
                <member-as>48</member-as>
                <identifier>600</identifier>
              </state>
            </confederation>
          </afi-safi>
        </afi-safis>
      </global>
    </bgp>
  </identifier>
</types>

```

```

        </state>
    </confederation>
    <state>
        <as>100</as>
        <router-id>1.2.3.4</router-id>
    </state>
</global>
</bgp>
<config>
    <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
        <name>100</name>
        <enabled>true</enabled>
    </config>
    <state>
        <identifier
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
            <name>100</name>
            <enabled>true</enabled>
        </state>
    </protocol>
</protocols>
<tables>
    <table>
        <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
            <address-family
                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                <config>
                    <protocol
                        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                        <address-family
                            xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                            </config>
                        <state>
                            <protocol
                                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                                <address-family
                                    xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                                    </state>
                                </table>
                            <table>
                                <protocol
                                    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
                                    <address-family
                                        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
                                        <config>
                                            <protocol

```

```

        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        </config>
        <state>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        </state>
        </table>
        <table>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        <config>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        </config>
        <state>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        </state>
        </table>
        </tables>
        </network-instance>
</network-instances>

```

Restrictions

- The `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global/afi-safis/afi-safi/add-paths` are available only on network-instance instance named "default".
- The container `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global/graceful-restart` are available only on network-instance instance named "default".
- The container `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global/route-selection-options` are available only on network-instance instance named "default".
- On the first time `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global` paths are configured, those configuration needs the respective **AFI-SAFI** configuration that be present to indicate **AFI type**: `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global/afi-safis`
- The above information is necessary for the OcNOS model to generate the following paths:

```
/ipi-bgp:bgp/bgp-instances/bgp-instance/address-families
```

```
/ipi-bgp:bgp/bgp-instances/bgp-instance/peer-groups/peer-group/address-families
```

```
/ipi-bgp:bgp/bgp-instances/bgp-instance/address-family-vrfs
```

- After the `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global` paths are configured on equipment, on the further configurations on those paths the user does not need to indicate the **AFI-SAFI**, the translation will look for this information on the equipment database.

Create BGP Neighbors

This XML configuration snippet is used to configure neighbors in non-default VRF of BGP.

Release

This configuration was introduced in OcNOS version 4.2.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload to configure network instances, specifically two instances: default and VRF1. It also configures BGP settings within these network instances, including neighbors and address families. Additionally, it configures tables for IPv4 and IPv6 address families within the network instances.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <config>
      <name>default</name>
      <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
      </config>
      <protocols>
        <protocol>
          <identifier
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
          <name>DIRECTLY_CONNECTED</name>
          <config>
            <identifier
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <enabled>true</enabled>
          </config>
        </protocol>
        <protocol>
          <identifier
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
          <name>123</name>
          <bgp>
            <global>
              <afi-safis>
```



```

        <afi-safi>
        <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
        <config>
        <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
        <enabled>true</enabled>
        </config>
        </afi-safi>
    </afi-safis>
    <config>
    <as>123</as>
    </config>
</global>
<neighbors>
    <neighbor>
    <neighbor-address>10.1.1.1</neighbor-address>
    <afi-safis>
    <afi-safi>
    <afi-safi-name
    xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
    <ipv4-unicast>
    <config>
    <send-default-route>true</send-default-route>
    </config>
    <prefix-limit>
    <config>
    <max-prefixes>5</max-prefixes>
    <warning-threshold-pct>60</warning-threshold-pct>
    </config>
    </prefix-limit>
    </ipv4-unicast>
    </config>
    <afi-safi-name
    xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
    <enabled>true</enabled>
    </config>
    <graceful-restart>
    <config>
    <enabled>true</enabled>
    </config>
    </graceful-restart>
    </afi-safi>
    </afi-safis>
    <config>
    <enabled>true</enabled>
    <remove-private-as
    xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:PRIVATE_AS_REMOVE_ALL</remove-private-as>
    <neighbor-address>10.1.1.1</neighbor-address>
    <peer-as>100</peer-as>
    <local-as>300</local-as>
    </config>
    <enable-bfd>

```

```

        <config>
          <enabled>true</enabled>
        </config>
      </enable-bfd>
    <transport>
      <config>
        <local-address>eth1</local-address>
      </config>
    </transport>
    <timers>
      <config>
        <keepalive-interval>30.00</keepalive-interval>
        <hold-time>120.00</hold-time>
      </config>
    </timers>
    <ebgp-multihop>
      <config>
        <multihop-ttl>5</multihop-ttl>
        <enabled>true</enabled>
      </config>
    </ebgp-multihop>
  </neighbor>
  <neighbor>
    <neighbor-address>11.1.1.1</neighbor-address>
    <afi-safis>
      <afi-safi>
        <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
          xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
        <ipv4-unicast>
          <prefix-limit>
            <config>
              <max-prefixes>7</max-prefixes>
              <warning-threshold-pct>70</warning-threshold-pct>
              <prevent-teardown>true</prevent-teardown>
            </config>
          </prefix-limit>
        </ipv4-unicast>
        <apply-policy>
          <config>
            <import-policy>rmap1</import-policy>
            <export-policy>rmap1</export-policy>
          </config>
        </apply-policy>
      </config>
      <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
        <enabled>true</enabled>
      </config>
    <add-paths>
      <config>
        <receive>true</receive>
        <send>true</send>
      </config>
    </add-paths>
  </afi-safi>

```

```

        </afi-safis>
        <config>
            <enabled>true</enabled>
            <neighbor-address>11.1.1.1</neighbor-address>
            <peer-as>123</peer-as>
        </config>
    </neighbor>
</neighbors>
</bgp>
<config>
    <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
        <name>123</name>
        <enabled>true</enabled>
    </config>
</protocol>
</protocols>
<tables>
    <table>
        <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
            <address-family
                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                <config>
                    <protocol
                        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                        <address-family
                            xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                            </config>
                        </table>
                    <table>
                        <protocol
                            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                            <address-family
                                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
                                <config>
                                    <protocol
                                        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                                        <address-family
                                            xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
                                            </config>
                                        </table>
                                    <table>
                                        <protocol
                                            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
                                            <address-family
                                                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                                                <config>

```

```

        <protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        </config>
      </table>
    </tables>
  </network-instance>
  <network-instance>
    <name>VRF1</name>
    <config>
      <name>VRF1</name>
      <type xmlns:oc-ni-types="http://openconfig.net/yang/network-
instance-types">oc-ni-types:L3VRF</type>
      <route-distinguisher>1.2.3.4:56</route-distinguisher>
    </config>
    <protocols>
      <protocol>
        <identifier xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
        <name>DIRECTLY_CONNECTED</name>
        <config>
          <identifier xmlns:oc-pol-types="http://openconfig.net/
yang/policy-types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
          <name>DIRECTLY_CONNECTED</name>
          <enabled>true</enabled>
        </config>
      </protocol>
    </protocol>
    <protocol>
      <identifier xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:BGP</identifier>
      <name>123</name>
      <bgp>
        <global>
          <config>
            <as>123</as>
          </config>
        </global>
        <neighbors>
          <neighbor>
            <neighbor-address>20.1.1.2</neighbor-address>
            <afi-safis>
              <afi-safi>
                <afi-safi-name xmlns:oc-bgp-types="http://
openconfig.net/yang/bgp-types">oc-bgp-types:IPv4_UNICAST</afi-safi-name>
                <config>
                  <afi-safi-name xmlns:oc-bgp-
types="http://openconfig.net/yang/bgp-types">oc-bgp-types:IPv4_UNICAST</afi-
safi-name>
                  <enabled>true</enabled>
                </config>
                <apply-policy>
                  <config>
                    <import-policy>rmap2</import-
policy>
                    <export-policy>rmap2</export-
policy>

```

```

        </config>
        </apply-policy>
        <ipv4-unicast>
        <config>
        <send-default-route>true</send-default-
route>
        </config>
        </ipv4-unicast>
        </afi-safi>
    </afi-safis>
    <config>
        <neighbor-address>20.1.1.2</neighbor-address>
        <remove-private-as xmlns:oc-bgp-types="http://
openconfig.net/yang/bgp-types">oc-bgp-types:PRIVATE_AS_REMOVE_ALL</remove-
private-as>
        <description>ebgp_VRF1</description>
        <local-as>300</local-as>
        <peer-as>200</peer-as>
    </config>
</neighbor>
<neighbor>
    <neighbor-address>21.1.1.2</neighbor-address>
    <afi-safis>
    <afi-safi>
        <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/
yang/bgp-types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
        <ipv4-unicast>
        <prefix-limit>
        <config>
            <max-prefixes>5</max-prefixes>
            <warning-threshold-pct>80</warning-
threshold-pct>
            <prevent-teardown>true</prevent-teardown>
        </config>
        </prefix-limit>
        </ipv4-unicast>
        <config>
            <afi-safi-name
            xmlns:oc-bgp-types="http://openconfig.net/
yang/bgp-types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
            <enabled>true</enabled>
        </config>
        <graceful-restart>
        <config>
            <enabled>true</enabled>
        </config>
        </graceful-restart>
    </afi-safi>
    </afi-safis>
    <config>
        <neighbor-address>21.1.1.2</neighbor-address>
        <peer-as>123</peer-as>
        <enabled>true</enabled>
    </config>
</neighbor>
</neighbors>
</bgp>

```

```

        <config>
          <identifier xmlns:oc-pol-types="http://openconfig.net/
yang/policy-types">oc-pol-types:BGP</identifier>
          <name>123</name>
          <enabled>true</enabled>
        </config>
      </protocol>
    </protocols>
    <tables>
      <table>
        <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">oc-types:IPv4</address-family>
        <config>
          <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
          <address-family xmlns:oc-types="http://openconfig.net/
yang/openconfig-types">oc-types:IPv4</address-family>
        </config>
      </table>
      <table>
        <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">oc-types:IPv6</address-family>
        <config>
          <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
          <address-family xmlns:oc-types="http://openconfig.net/
yang/openconfig-types">oc-types:IPv6</address-family>
        </config>
      </table>
      <table>
        <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:BGP</protocol>
        <address-family xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">oc-types:IPv4</address-family>
        <config>
          <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:BGP</protocol>
          <address-family xmlns:oc-types="http://openconfig.net/
yang/openconfig-types">oc-types:IPv4</address-family>
        </config>
      </table>
    </tables>
  </network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI commands are used to configure a BGP setup with two address families: global ipv4 unicast and ipv4 vrf VRF1. It includes various neighbor configurations, prefix limits, route maps, and other BGP parameters to control BGP behavior in both the global and VRF contexts.

```

ip vrf VRF1
rd 100:200
exit
router bgp 123

```

```

neighbor 10.1.1.1 remote-as 100
neighbor 10.1.1.1 local-as 300
neighbor 10.1.1.1 fall-over bfd
neighbor 11.1.1.1 remote-as 123
neighbor 10.1.1.1 ebgp-multihop 5
neighbor 10.1.1.1 update-source eth1
neighbor 10.1.1.1 timers 30 120
!
address-family ipv4 unicast
neighbor 10.1.1.1 activate
neighbor 10.1.1.1 remove-private-AS
neighbor 10.1.1.1 maximum-prefix 5 60
neighbor 10.1.1.1 capability graceful-restart
neighbor 10.1.1.1 default-originate
neighbor 11.1.1.1 activate
neighbor 11.1.1.1 additional-paths send-receive
neighbor 11.1.1.1 maximum-prefix 7 70 warning-only
neighbor 11.1.1.1 route-map rmap1 in
neighbor 11.1.1.1 route-map rmap1 out
exit-address-family
!
address-family ipv4 vrf VRF1
neighbor 20.1.1.2 remote-as 200
neighbor 20.1.1.2 local-as 300
neighbor 20.1.1.2 activate
neighbor 20.1.1.2 remove-private-AS
neighbor 20.1.1.2 route-map rmap2 in
neighbor 20.1.1.2 route-map rmap2 out
neighbor 20.1.1.2 default-originate
neighbor 21.1.1.2 remote-as 123
neighbor 21.1.1.2 activate
neighbor 21.1.1.2 maximum-prefix 5 80 warning-only
neighbor 21.1.1.2 capability graceful-restart
neighbor 20.1.1.2 description ebgp_VRF1
exit-address-family
!
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure BGP settings with VRF support and address-families in an OcNOS network device using the IPI YANG models. It defines BGP peering relationships, specify BGP attributes, and apply route maps within the context of both the global BGP instance and the VRF VRF1.

```

<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-network-
instance">
  <network-instance>
    <instance-name>VRF1</instance-name>
    <instance-type>vrf</instance-type>
    <config>
      <instance-name>VRF1</instance-name>
      <instance-type>vrf</instance-type>
    </config>
    <vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vrf">
      <config>
        <vrf-name>VRF1</vrf-name>
      </config>
      <bgp-vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp-vrf">
```

```

        <config>
            <rd-string>100:200</rd-string>
        </config>
    </bgp-vrf>
</vrf>
</network-instance>
</network-instances>
<bgp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp">
    <bgp-instances>
        <bgp-instance>
            <bgp-as>123</bgp-as>
            <config>
                <bgp-as>123</bgp-as>
            </config>
            <address-families>
                <address-family>
                    <afi>ipv4</afi>
                    <safi>unicast</safi>
                    <config>
                        <afi>ipv4</afi>
                        <safi>unicast</safi>
                    </config>
                </address-family>
            </address-families>
            <peers>
                <peer>
                    <peer-address>10.1.1.1</peer-address>
                    <address-families>
                        <address-family>
                            <afi>ipv4</afi>
                            <safi>unicast</safi>
                            <maximum-prefixes>
                                <prefix-count>5</prefix-count>
                                <config>
                                    <prefix-count>5</prefix-count>
                                    <threshold-percentage>60</threshold-
percentage>
                                </config>
                            </maximum-prefixes>
                        </address-family>
                    </address-families>
                    <config>
                        <afi>ipv4</afi>
                        <safi>unicast</safi>
                        <activate />
                        <peer-remove-private-as />
                        <capability-graceful-restart />
                        <default-peer-route-map-name />
                    </config>
                </peer>
            </address-families>
        </config>
        <peer-address>10.1.1.1</peer-address>
        <peer-as>100</peer-as>
        <enable-peer-bfd />
        <peer-local-as>300</peer-local-as>
        <source-identifier>eth1</source-identifier>
    </config>
    <timers>

```



```

        <config>
            <keep-alive>30</keep-alive>
            <hold-time>120</hold-time>
        </config>
    </timers>
    <ebgp-multihop>
        <config>
            <maximum-hop-count>5</maximum-hop-count>
            <enabled />
        </config>
    </ebgp-multihop>
</peer>
<peer>
    <peer-address>11.1.1.1</peer-address>
    <address-families>
        <address-family>
            <afi>ipv4</afi>
            <safi>unicast</safi>
            <maximum-prefixes>
                <maximum-prefix>
                    <prefix-count>7</prefix-count>
                    <config>
                        <prefix-count>7</prefix-count>
                        <threshold-percentage>70</threshold-
percentage>
                            <warning-only />
                        </config>
                    </maximum-prefix>
                </maximum-prefixes>
                <route-map-filters>
                    <route-map-filter>
direction>
                        <route-map-direction>in</route-map-
direction>
                            <config>
direction>
                                <route-map-direction>in</route-map-
                                <route-map-name>rmap1</route-map-name>
                            </config>
                        </route-map-filter>
                        <route-map-filter>
direction>
                                <route-map-direction>out</route-map-
                                <route-map-name>rmap1</route-map-name>
                            </config>
                        </route-map-filter>
                    </route-map-filters>
                </route-map-filters>
            </address-family>
        </address-families>
        <config>
            <afi>ipv4</afi>
            <safi>unicast</safi>
            <additional-paths-mode>receive send</
additional-paths-mode>
                <activate />
            </config>
        </address-family>
    </address-families>

```

```

        <config>
            <peer-address>11.1.1.1</peer-address>
            <peer-as>123</peer-as>
        </config>
    </peer>
</peers>
<address-family-vrfs>
    <address-family-vrf>
        <afi>ipv4</afi>
        <safi>unicast</safi>
        <vrf-name>VRF1</vrf-name>
        <vrf-peers>
            <vrf-peer>
                <peer-address>20.1.1.2</peer-address>
                <route-map-filters>
                    <route-map-filter>
direction>                        <route-map-direction>in</route-map-
                                <config>
direction>                        <route-map-direction>in</route-map-
                                <route-map-name>rmap2</route-map-name>
                                </config>
                                </route-map-filter>
                                <route-map-filter>
direction>                        <route-map-direction>out</route-map-
                                <config>
direction>                        <route-map-direction>out</route-map-
                                <route-map-name>rmap2</route-map-name>
                                </config>
                                </route-map-filter>
                            </route-map-filters>
                            <config>
                                <peer-address>20.1.1.2</peer-address>
                                <peer-as>200</peer-as>
                                <peer-local-as>300</peer-local-as>
                                <activate />
                                <peer-remove-private-as />
                                <default-peer-route-map-name />
                            </config>
                        </vrf-peer>
                        <vrf-peer>
                            <peer-address>21.1.1.2</peer-address>
                            <maximum-prefixes>
                                <maximum-prefix>
                                    <prefix-count>5</prefix-count>
                                    <config>
                                        <prefix-count>5</prefix-count>
percentage>                        <threshold-percentage>80</threshold-
                                    <warning-only />
                                    </config>
                                </maximum-prefix>
                            </maximum-prefixes>
                        </config>
                            <peer-address>21.1.1.2</peer-address>

```

```

        <peer-as>123</peer-as>
        <activate />
        <capability-graceful-restart />
    </config>
</vrf-peer>
</vrf-peers>
<config>
    <afi>ipv4</afi>
    <safi>unicast</safi>
    <vrf-name>VRF1</vrf-name>
</config>
</address-family-vrf>
</address-family-vrfs>
</bgp-instance>
</bgp-instances>
</bgp>

```

Validation with NetConf get

Here is a NetConf validation response to configure payload for BGP settings in a network instance, including global BGP settings and BGP neighbors.

```

    <network-instances xmlns="http://openconfig.net/yang/network-
instance">
    <network-instance>
    <name>default</name>
    <protocols>
    <protocol>
    <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
    <name>123</name>
    <bgp>
    <global>
    <config>
    <as>123</as>
    </config>
    <afi-safis>
    <afi-safi>
    <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPv4_UNICAST</afi-safi-name>
    <config>
    <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPv4_UNICAST</afi-safi-name>
    <enabled>true</enabled>
    </config>
    </afi-safi>
    </afi-safis>
    </global>
    <neighbors>
    <neighbor>
    <neighbor-address>10.1.1.1</neighbor-address>
    <afi-safis>
    <afi-safi>

```

```

        <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
        <ipv4-unicast>
        <config>
        <send-default-route>true</send-default-route>
        </config>
        <prefix-limit>
        <config>
        <max-prefixes>5</max-prefixes>
        <warning-threshold-pct>60</warning-threshold-pct>
        </config>
        </prefix-limit>
        </ipv4-unicast>
        <config>
        <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
        <enabled>true</enabled>
        </config>
        <graceful-restart>
        <config>
        <enabled>true</enabled>
        </config>
        </graceful-restart>
        </afi-safi>
</afi-safis>
<config>
        <enabled>true</enabled>
        <neighbor-address>10.1.1.1</neighbor-address>
        <peer-as>100</peer-as>
        <local-as>300</local-as>
        <remove-private-as
types">oc-bgp-types:PRIVATE_AS_REMOVE_ALL</remove-private-as>
        </config>
        <enable-bfd>
        <config>
        <enabled>true</enabled>
        </config>
        </enable-bfd>
        <ebgp-multihop>
        <config>
        <enabled>true</enabled>
        <multihop-ttl>5</multihop-ttl>
        </config>
        </ebgp-multihop>
        <transport>
        <config>
        <local-address>eth1</local-address>
        </config>
        </transport>
        <timers>
        <config>
        <keepalive-interval>30.00</keepalive-interval>
        <hold-time>120.00</hold-time>
        </config>

```

```

        </timers>
      </neighbor>
    </neighbors>
    <neighbor-address>11.1.1.1</neighbor-address>
    <afi-safis>
      <afi-safi>
        <afi-safi-name
          xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
        <ipv4-unicast>
          <prefix-limit>
            <config>
              <max-prefixes>7</max-prefixes>
              <warning-threshold-pct>70</warning-threshold-pct>
              <prevent-teardown>true</prevent-teardown>
            </config>
          </prefix-limit>
        </ipv4-unicast>
        <apply-policy>
          <config>
            <import-policy>rmap1</import-policy>
            <export-policy>rmap1</export-policy>
          </config>
        </apply-policy>
        <config>
          <afi-safi-name
            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
          <enabled>true</enabled>
        </config>
        <add-paths>
          <config>
            <receive>true</receive>
            <send>true</send>
          </config>
        </add-paths>
      </afi-safi>
    </afi-safis>
    <config>
      <enabled>true</enabled>
      <neighbor-address>11.1.1.1</neighbor-address>
      <peer-as>123</peer-as>
    </config>
  </neighbor>
</neighbors>
</bgp>
</protocol>
</protocols>
</network-instance>
<network-instance>
  <name>management</name>
</network-instance>
<network-instance>
  <name>VRF1</name>
  <protocols>
    <protocol>
      <identifier>

```

```

        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
    <name>123</name>
    <bgp>
        <global>
            <config>
                <as>123</as>
            </config>
            <afi-safis>
                <afi-safi>
                    <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                    <config>
                        <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                        <enabled>true</enabled>
                    </config>
                </afi-safi>
            </afi-safis>
        </global>
        <neighbors>
            <neighbor>
                <neighbor-address>20.1.1.2</neighbor-address>
                <afi-safis>
                    <afi-safi>
                        <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                        <apply-policy>
                            <config>
                                <import-policy>rmap2</import-policy>
                                <export-policy>rmap2</export-policy>
                            </config>
                        </apply-policy>
                    <ipv4-unicast>
                        <config>
                            <send-default-route>true</send-default-route>
                        </config>
                    </ipv4-unicast>
                <config>
                    <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                    <enabled>true</enabled>
                </config>
            </afi-safi>
        </afi-safis>
        <apply-policy>
            <config>
                <import-policy>rmap2</import-policy>
                <export-policy>rmap2</export-policy>
            </config>
        </apply-policy>
    </config>
    <neighbor-address>20.1.1.2</neighbor-address>
    <peer-as>200</peer-as>

```

```

        <local-as>300</local-as>
        <enabled>true</enabled>
        <remove-private-as
types">oc-bgp-types:PRIVATE_AS_REMOVE_ALL</remove-private-as>
        </config>
    </neighbor>
    <neighbor>
        <neighbor-address>21.1.1.2</neighbor-address>
        <afi-safis>
            <afi-safi>
                <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                <ipv4-unicast>
                    <prefix-limit>
                        <config>
                            <max-prefixes>5</max-prefixes>
                            <warning-threshold-pct>80</warning-threshold-pct>
                            <prevent-teardown>true</prevent-teardown>
                        </config>
                    </prefix-limit>
                </ipv4-unicast>
            </config>
            <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                <enabled>true</enabled>
            </config>
            <graceful-restart>
                <config>
                    <enabled>true</enabled>
                </config>
            </graceful-restart>
        </afi-safi>
    </afi-safis>
    <config>
        <neighbor-address>21.1.1.2</neighbor-address>
        <peer-as>123</peer-as>
        <enabled>true</enabled>
    </config>
</neighbor>
</neighbors>
</bgp>
</protocol>
</protocols>
</network-instance>
</network-instances>

```

Restrictions

- The leaf `/network-instances/network-instance/protocols/protocol/bgp/neighbors/neighbor/config/remove-private-as` must have the OpenConfig value `PRIVATE_AS_REMOVE_ALL`
- The below leaf was not supported by the current implementation, but this feature is supported at the **AFI-SAFI** level of each neighbor.

```
/network-instances/network-instance/protocols/protocol/bgp/neighbors/neighbor/
apply-policy
```

- The below leaf was not supported by the current implementation at the neighbor level, but this feature is supported at the **AFI-SAFI** level of each neighbor, as well as at the global level (`/network-instances/network-instance/protocols/protocol/bgp/global/graceful-restart`).

```
/network-instances/network-instance/protocols/protocol/bgp/neighbors/neighbor/
graceful-restart
```

- The below leaf was not supported by the current implementation at the neighbor level, but this feature is supported at the global level (`/network-instances/network-instance/protocols/protocol/bgp/global/afi-safis/afi-safi/use-multiple-paths`).

```
/network-instances/network-instance/protocols/protocol/bgp/neighbors/neighbor/
use-multiple-paths
```

- The below leaf is limited to 32 characters and must have the format `<interface>.<subinterface>`, e.g., `eth2.10`.

```
/network-instances/network-instance/interfaces/interface/config/id
```

- On the first time `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/neighbor` paths are configured, those configuration needs the respective **AFI-SAFI** configuration that be present to indicate **AFI** type:

```
/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/neighbors/
neighbor/afi-safis
```

- The above information is necessary for the OcNOS model to generate the following paths:

```
/ipi-bgp:bgp/bgp-instances/bgp-instance/address-families
/ipi-bgp:bgp/bgp-instances/bgp-instance/peer-groups/peer-group/address-
families
/ip.i-bgp:bgp/bgp-instances/bgp-instance/address-family-vrfs
```

- After the `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/neighbors` paths are configured on equipment, on the further configurations on those paths the user does not need to indicate the AFI-SAFI, the translation will look for this information on the equipment database.

Configure eBGP Neighbor with TTL

This XML configuration snippet defines the eBGP neighbor with a Time-to-Live (TTL) value.

Release

This configuration was introduced in OcNOS version 4.2.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload that defines a network instance named `VRf1` with various configurations, including the route distinguisher, protocols, and tables. Specifically, it sets up BGP protocol with a global AS number and a neighbor with an AS number. The eBGP-multihop feature is enabled for this neighbor with a TTL value.

Additionally, the payload defines three tables, one for directly connected IPv4 routes, one for directly connected IPv6 routes, and one for BGP IPv4 routes.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>VRf1</name>
    <config>
```



```

        <name>VRF1</name>
        <type xmlns:oc-ni-types="http://openconfig.net/yang/network-
instance-types">oc-ni-types:L3VRF</type>
        <route-distinguisher>1.2.3.4:56</route-distinguisher>
    </config>
    <protocols>
        <protocol>
            <identifier xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <config>
                <identifier xmlns:oc-pol-types="http://openconfig.net/
yang/policy-types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
                <name>DIRECTLY_CONNECTED</name>
                <enabled>true</enabled>
            </config>
        </protocol>
        <protocol>
            <identifier xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:BGP</identifier>
            <name>100</name>
            <bgp>
                <global>
                    <config>
                        <as>100</as>
                    </config>
                </global>
                <neighbors>
                    <neighbor>
                        <neighbor-address>1.1.1.2</neighbor-address>
                        <afi-safis>
                            <afi-safi>
                                <afi-safi-name xmlns:oc-bgp-types="http://
openconfig.net/yang/bgp-types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                                <config>
                                    <afi-safi-name xmlns:oc-bgp-
types="http://openconfig.net/yang/bgp-types">oc-bgp-types:IPV4_UNICAST</afi-
safi-name>
                                    <enabled>true</enabled>
                                </config>
                            </afi-safi>
                        </afi-safis>
                    </neighbor>
                </neighbors>
            </bgp>
        </config>
        <identifier xmlns:oc-pol-types="http://openconfig.net/
yang/policy-types">oc-pol-types:BGP</identifier>

```

```

        <name>100</name>
        <enabled>true</enabled>
    </config>
</protocol>
</protocols>
<tables>
    <table>
        <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">oc-types:IPv4</address-family>
        <config>
            <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
            <address-family xmlns:oc-types="http://openconfig.net/
yang/openconfig-types">oc-types:IPv4</address-family>
            </config>
        </table>
        <table>
            <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
            <address-family xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">oc-types:IPv6</address-family>
            <config>
                <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
                <address-family xmlns:oc-types="http://openconfig.net/
yang/openconfig-types">oc-types:IPv6</address-family>
                </config>
            </table>
            <table>
                <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:BGP</protocol>
                <address-family xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">oc-types:IPv4</address-family>
                <config>
                    <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:BGP</protocol>
                    <address-family xmlns:oc-types="http://openconfig.net/
yang/openconfig-types">oc-types:IPv4</address-family>
                    </config>
                </table>
            </tables>
        </network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI commands are used to configure a BGP neighbor relationship in the `VRF1`, allowing the BGP router with AS number 100 to communicate with a neighbor at IP address 1.1.1.2, which has AS number 200, and the configuration ensures that the session can be established even if the TTL is set to a higher value, in this case, 20.

```

router bgp 100
!
address-family ipv4 vrf VRF1
neighbor 1.1.1.2 remote-as 200
neighbor 1.1.1.2 activate
neighbor 1.1.1.2 ebgp-multihop 20

```

```
exit-address-family
!
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload that defines a VRF instance named `VRF1` with the associated BGP settings. The VRF is set to use IPv4 unicast address-family. Within this VRF, a BGP peering session is established with a remote neighbor having the IP address 1.1.1.2 and AS number 200. To ensure the BGP session can be established, the `ebgp-multihop` feature is enabled with a maximum hop count of 20, allowing the BGP router to communicate with a neighbor that might be multiple hops away. The BGP configuration also specifies a route distinguisher (RD) of 1.2.3.4:56 for the VRF. This configuration is essential for routing and forwarding traffic within the VRF while maintaining isolation from other VRFs or the global routing table.

```
<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-network-
instance">
  <network-instance>
    <instance-name>VRF1</instance-name>
    <instance-type>vrf</instance-type>
    <config>
      <instance-name>VRF1</instance-name>
      <instance-type>vrf</instance-type>
    </config>
    <vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vrf">
      <config>
        <vrf-name>VRF1</vrf-name>
      </config>
      <bgp-vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp-vrf">
        <config>
          <rd-string>1.2.3.4:56</rd-string>
        </config>
      </bgp-vrf>
    </vrf>
  </network-instance>
</network-instances>
<bgp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp">
  <bgp-instances>
    <bgp-instance>
      <bgp-as>100</bgp-as>
      <config>
        <bgp-as>100</bgp-as>
      </config>
      <address-family-vrfs>
        <address-family-vrf>
          <afi>ipv4</afi>
          <safi>unicast</safi>
          <vrf-name>VRF1</vrf-name>
          <vrf-peers>
            <vrf-peer>
              <peer-address>1.1.1.2</peer-address>
              <config>
                <peer-address>1.1.1.2</peer-address>
                <peer-as>200</peer-as>
              </config>
            <ebgp-multihop>
              <config>
                <maximum-hop-count>20</maximum-hop-count>
```

```

        </enabled>
      </config>
    </ebgp-multihop>
  </vrf-peer>
</vrf-peers>
<config>
  <afi>ipv4</afi>
  <safi>unicast</safi>
  <vrf-name>VRF1</vrf-name>
</config>
</address-family-vrf>
</address-family-vrfs>
</bgp-instance>
</bgp-instances>
</bgp>

```

Validation with NetConf get

Here is a NetConf validation response for the network instance `VRF1` and its associated BGP settings indicates that the provided configuration is compliant with the expected structure and format defined in the YANG data model for network instances and BGP protocols. This validation response affirms that there are no errors or inconsistencies in the configuration, affirming its readiness for application to the network device. It verifies that the specified parameters, such as route distinguisher, autonomous system numbers, and address families, are correctly defined and align with the defined standards, ensuring smooth and accurate operation within the network infrastructure.

```

    <network-instances xmlns="http://openconfig.net/yang/network-
instance">
      <network-instance>
        <name>VRF1</name>
        <config>
          <name>VRF1</name>
          <type
            xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
          <route-distinguisher>1.2.3.4:56</route-distinguisher>
        </config>
        <state>
          <name>VRF1</name>
          <type
            xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
          <route-distinguisher>1.2.3.4:56</route-distinguisher>
        </state>
        <protocols>
          <protocol>
            <identifier
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <config>
              <identifier
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
              <name>DIRECTLY_CONNECTED</name>
              <enabled>true</enabled>
            </config>
          </state>

```

```

        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
        <name>DIRECTLY_CONNECTED</name>
        <enabled>true</enabled>
      </state>
    </protocol>
    <protocol>
      <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGPP</identifier>
      <name>100</name>
      <bgp>
        <global>
          <config>
            <as>100</as>
          </config>
          <state>
            <as>100</as>
          </state>
        </global>
        <neighbors>
          <neighbor>
            <neighbor-address>1.1.1.2</neighbor-address>
            <afi-safis>
              <afi-safi>
                <afi-safi-name
                  xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                <config>
                  <afi-safi-name
                    xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                    <enabled>true</enabled>
                  </config>
                </afi-safi>
              </afi-safis>
            </neighbor>
          </neighbors>
        </global>
        <neighbors>
          <neighbor>
            <neighbor-address>1.1.1.2</neighbor-address>
            <peer-as>200</peer-as>
            <enabled>true</enabled>
          </neighbor>
        </neighbors>
        <ebgp-multihop>
          <config>
            <enabled>true</enabled>
            <multihop-ttl>20</multihop-ttl>
          </config>
          <state>
            <enabled>true</enabled>
            <multihop-ttl>20</multihop-ttl>
          </state>
        </ebgp-multihop>
        <state>
          <neighbor-address>1.1.1.2</neighbor-address>
          <peer-as>200</peer-as>
          <enabled>true</enabled>
        </state>
      </bgp>
    </protocol>
  </state>
</state>

```

```

        </neighbor>
      </neighbors>
    </bgp>
  </config>
  <identifier
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:BGP</identifier>
    <name>100</name>
    <enabled>true</enabled>
  </config>
  <state>
    <identifier
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:BGP</identifier>
      <name>100</name>
      <enabled>true</enabled>
    </state>
  </protocol>
</protocols>
<tables>
  <table>
    <protocol
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
    <address-family
      xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
    <config>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:BGP</protocol>
        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">oc-types:IPv4</address-family>
        </config>
      </table>
    </tables>
  </network-instance>
</network-instances>

```

Restrictions

- The leaf `/network-instances/network-instance/protocols/protocol/bgp/neighbors/neighbor/config/peer-type` is not supported.
- On the first time `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/neighbor` paths are configured, those configuration needs the respective **AFI-SAFI** configuration that be present to indicate **AFI type** `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/neighbors/neighbor/afi-safis`
- The above information is necessary for the OcNOS model to generate the following paths:
 - `/ipi-bgp:bgp/bgp-instances/bgp-instance/address-families`
 - `/ipi-bgp:bgp/bgp-instances/bgp-instance/peer-groups/peer-group/address-families`
 - `/ipi-bgp:bgp/bgp-instances/bgp-instance/address-family-vrfs`

- After the `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/neighbors` paths are configured on equipment, on the further configurations on those paths the user does not need to indicate the **AFI-SAFI**, the translation will look for this information on the equipment database.

Create BGP Peer-groups with Default VRF

This XML configuration snippet is used to specify that BGP peer-groups should be created within the default VRF. Peer groups are configurations that can be used elsewhere without the need to repeat them.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload to configure BGP settings within the default network instance. It defines various BGP parameters and peer groups for the specified AFI-SAFI combinations, including IPv4 unicast, IPv4 labeled unicast, IPv6 labeled unicast, and L3VPN IPv6 unicast. This configuration includes authentication passwords, timers, route reflector settings, and more for different peer groups such as ABC, peer1, and peer2.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
        <name>100</name>
        <bgp>
          <global>
            <config>
              <as>100</as>
            </config>
            <route-selection-options>
              <config>
                <enable-aigp>true</enable-aigp>
              </config>
              <state>
                <enable-aigp>true</enable-aigp>
              </state>
            </route-selection-options>
            <afi-safis>
              <afi-safi>
                <afi-safi-name
                  xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                <config>
                  <afi-safi-name
                    xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                  <enabled>true</enabled>
                </config>
              </afi-safi>
```

```

    <afi-safi>
      <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_LABELED_UNICAST</afi-safi-name>
      <config>
        <afi-safi-name
          xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_LABELED_UNICAST</afi-safi-name>
          <enabled>true</enabled>
        </config>
      </afi-safi>
    <afi-safi>
      <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_LABELED_UNICAST</afi-safi-name>
      <config>
        <afi-safi-name
          xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_LABELED_UNICAST</afi-safi-name>
          <enabled>true</enabled>
        </config>
      </afi-safi>
    <afi-safi>
      <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L3VPN_IPV6_UNICAST</afi-safi-name>
      <config>
        <afi-safi-name
          xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L3VPN_IPV6_UNICAST</afi-safi-name>
          <enabled>true</enabled>
        </config>
      </afi-safi>
    </afi-safis>
  </global>
  <peer-groups>
    <peer-group>
      <peer-group-name>ABC</peer-group-name>
      <config>
        <auth-password>0x9603e78694ace534ea912b9ab53f8a55</auth-
password>
        <peer-group-name>ABC</peer-group-name>
        <peer-as>100</peer-as>
        <description>Non VRF peer-group configs</description>
      </config>
      <enable-bfd>
        <config>
          <enabled>true</enabled>
        </config>
      </enable-bfd>
      <timers>
        <config>
          <connect-retry>300.00</connect-retry>
          <minimum-advertisement-interval>20.00</minimum-
advertisement-interval>
          <keepalive-interval>300.00</keepalive-interval>
          <hold-time>8200.00</hold-time>
        </config>
      </timers>
    </peer-group>
  </peer-groups>

```



```

</timers>
<transport>
  <config>
    <local-address>10.1.1.1</local-address>
    <passive-mode>true</passive-mode>
  </config>
</transport>
<afi-safis>
  <afi-safi>
    <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
    <ipv4-unicast>
      <prefix-limit>
        <config>
          <max-prefixes>4294967295</max-prefixes>
          <warning-threshold-pct>100</warning-threshold-pct>
          <prevent-teardown>true</prevent-teardown>
        </config>
      </prefix-limit>
      <config>
        <send-default-route>true</send-default-route>
      </config>
    </ipv4-unicast>
    <config>
      <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
      <enabled>true</enabled>
    </config>
    <apply-policy>
      <config>
        <import-policy>in-map</import-policy>
        <export-policy>out-map</export-policy>
      </config>
    </apply-policy>
  </afi-safi>
</afi-safis>
<route-reflector>
  <config>
    <route-reflector-client>true</route-reflector-client>
  </config>
</route-reflector>
</peer-group>
<peer-group>
  <peer-group-name>peer1</peer-group-name>
  <config>
    <auth-password>0x9a20ef22549ad84b</auth-password>
    <peer-group-name>peer1</peer-group-name>
    <peer-as>200</peer-as>
  </config>
  <ebgp-multihop>
    <config>
      <enabled>true</enabled>
    </config>
  </ebgp-multihop>
</afi-safis>

```

```

        <afi-safi>
        <afi-safi-name
            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_LABELED_UNICAST</afi-safi-name>
        <config>
        <afi-safi-name
            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_LABELED_UNICAST</afi-safi-name>
            <enabled>true</enabled>
        </config>
        </afi-safi>
    </afi-safis>
</peer-group>
<peer-group>
    <peer-group-name>peer2</peer-group-name>
    <config>
        <auth-password>0x9603e78694ace534e74f24019f5bfeb5</auth-
password>
        <peer-group-name>peer2</peer-group-name>
        <peer-as>300</peer-as>
    </config>
    <enable-bfd>
    <config>
        <enabled>true</enabled>
    </config>
    </enable-bfd>
    <ebgp-multihop>
    <config>
        <multihop-ttl>10</multihop-ttl>
        <enabled>true</enabled>
    </config>
    </ebgp-multihop>
    <afi-safis>
    <afi-safi>
    <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_LABELED_UNICAST</afi-safi-name>
    <ipv6-labeled-unicast>
    <prefix-limit>
    <config>
        <max-prefixes>1</max-prefixes>
        <prevent-teardown>true</prevent-teardown>
    </config>
    </prefix-limit>
    </ipv6-labeled-unicast>
    <config>
    <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_LABELED_UNICAST</afi-safi-name>
        <enabled>true</enabled>
    </config>
    </afi-safi>
    <afi-safi>
    <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L3VPN_IPV6_UNICAST</afi-safi-name>
    <l3vpn-ipv6-unicast>
    <prefix-limit>

```

```

        <config>
          <max-prefixes>12345</max-prefixes>
        </config>
      </prefix-limit>
    </l3vpn-ipv6-unicast>
  <config>
    <afi-safi-name
      xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L3VPN_IPV6_UNICAST</afi-safi-name>
    <enabled>true</enabled>
  </config>
</afi-safi>
</afi-safis>
</peer-group>
</peer-groups>
</bgp>
</protocol>
</protocols>
</network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI commands configure various BGP parameters and policies for different neighbors and address families within AS number 100.

```

!
router bgp 100
  neighbor ABC peer-group
  neighbor ABC remote-as 100
  neighbor ABC fall-over bfd multihop
  neighbor peer1 peer-group
  neighbor peer1 remote-as 200
  neighbor peer2 peer-group
  neighbor peer2 remote-as 300
  neighbor peer2 fall-over bfd
  neighbor ABC description Non VRF peer-group configs
  neighbor ABC passive
  neighbor ABC update-source 10.1.1.1
  neighbor ABC authentication-key 0x9603e78694ace534ea912b9ab53f8a55
  neighbor ABC advertisement-interval 20
  neighbor ABC timers 300 8200
  neighbor ABC timers connect 300
  neighbor peer1 ebgp-multihop
  neighbor peer1 authentication-key 0x9a20ef22549ad84b
  neighbor peer2 ebgp-multihop 10
  neighbor peer2 authentication-key 0x9603e78694ace534e74f24019f5bfeb5
!
address-family ipv4 unicast
  neighbor ABC activate
  neighbor ABC route-reflector-client
  neighbor ABC default-originate
  neighbor ABC maximum-prefix 4294967295 100 warning-only
  neighbor ABC route-map in-map in
  neighbor ABC route-map out-map out
exit-address-family
!

```

```

address-family ipv4 labeled-unicast
neighbor peer1 activate
exit-address-family
!
address-family vpnv6 unicast
neighbor peer2 allow-ebgp-vpn
neighbor peer2 activate
neighbor peer2 maximum-prefix 12345
exit-address-family
!
address-family ipv6 labeled-unicast
neighbor peer2 activate
neighbor peer2 maximum-prefix 1 warning-only
exit-address-family
!

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to set up BGP peering and routing policies within the given AS number (100) and defines parameters for various address families and peer groups.

```

<bgp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp">
  <bgp-instances>
    <bgp-instance>
      <bgp-as>100</bgp-as>
      <config>
        <bgp-as>100</bgp-as>
      </config>
      <state>
        <bgp-as>100</bgp-as>
        <version>4</version>
        <table-version>1</table-version>
        <total-prefixes>0</total-prefixes>
        <router-run-time-ip-address>0.0.0.0</router-run-time-ip-
address>
        <scan-remain-time>49</scan-remain-time>
      </state>
      <rib>
        <address-family>
          <safi>link-state</safi>
          <afi>link-state</afi>
          <state>
            <safi>link-state</safi>
            <afi>link-state</afi>
          </state>
        </address-family>
      </rib>
      <address-families>
        <address-family>
          <afi>ipv4</afi>
          <safi>unicast</safi>
          <config>
            <afi>ipv4</afi>
            <safi>unicast</safi>
          </config>
          <state>
            <afi>ipv4</afi>

```

```

        <safi>unicast</safi>
    </state>
</address-family>
<address-family>
    <afi>ipv4</afi>
    <safi>labeled-unicast</safi>
    <config>
        <afi>ipv4</afi>
        <safi>labeled-unicast</safi>
    </config>
    <state>
        <afi>ipv4</afi>
        <safi>labeled-unicast</safi>
    </state>
</address-family>
<address-family>
    <afi>ipv6</afi>
    <safi>labeled-unicast</safi>
    <config>
        <afi>ipv6</afi>
        <safi>labeled-unicast</safi>
    </config>
    <state>
        <afi>ipv6</afi>
        <safi>labeled-unicast</safi>
    </state>
</address-family>
<address-family>
    <afi>ipv6</afi>
    <safi>vpn-unicast</safi>
    <config>
        <afi>ipv6</afi>
        <safi>vpn-unicast</safi>
    </config>
    <state>
        <afi>ipv6</afi>
        <safi>vpn-unicast</safi>
    </state>
</address-family>
</address-families>
<peer-groups>
    <peer-group>
        <peer-group-tag>ABC</peer-group-tag>
        <bgp-passwords>
            <bgp-password>
                <password>0x9603e78694ace534ea912b9ab53f8a55</
password>
                <config>
                    <password>0x9603e78694ace534ea912b9ab53f8a55</
password>
                    <auth-key-encrypt>1</auth-key-encrypt>
                </config>
            <state>
                <password>0x9603e78694ace534ea912b9ab53f8a55</
password>
                <auth-key-encrypt>1</auth-key-encrypt>
            </state>

```

```

        </bgp-password>
    </bgp-passwords>
    <config>
        <peer-group-tag>ABC</peer-group-tag>
        <peer-group-range>static</peer-group-range>
        <peer-as>100</peer-as>
        <enable-peer-bfd />
        <enable-peer-bfd-multihop />
description>        <peer-description>Non VRF peer-group configs</peer-
        <peer-connect-interval>300</peer-connect-interval>
advertisement-interval>    <min-route-advertisement-interval>20</min-route-
        <source-identifier>10.1.1.1</source-identifier>
        <neighbor-passive />
    </config>
    <state>
        <peer-group-tag>ABC</peer-group-tag>
        <peer-group-range>static</peer-group-range>
        <peer-as>100</peer-as>
        <enable-peer-bfd />
        <enable-peer-bfd-multihop />
description>        <peer-description>Non VRF peer-group configs</peer-
        <peer-connect-interval>300</peer-connect-interval>
advertisement-interval>    <min-route-advertisement-interval>20</min-route-
        <source-identifier>10.1.1.1</source-identifier>
        <neighbor-passive />
    </state>
    <timers>
        <config>
            <keep-alive>300</keep-alive>
            <hold-time>8200</hold-time>
        </config>
        <state>
            <keep-alive>300</keep-alive>
            <hold-time>8200</hold-time>
        </state>
    </timers>
    <address-families>
        <address-family>
            <afi>ipv4</afi>
            <safi>unicast</safi>
            <maximum-prefixes>
                <maximum-prefix>
                    <prefix-count>4294967295</prefix-count>
count>                    <config>
                        <prefix-count>4294967295</prefix-
percentage>                    <threshold-percentage>100</threshold-
                                <warning-only />
                                </config>
                                <state>
count>                                    <prefix-count>4294967295</prefix-

```

```

percentage>                                <threshold-percentage>100</threshold-
                                           <warning-only />
                                           </state>
                                           </maximum-prefix>
</maximum-prefixes>
<config>
  <afi>ipv4</afi>
  <safi>unicast</safi>
  <activate />
  <default-peer-route-map-name />
  <peer-route-reflector />
</config>
<state>
  <afi>ipv4</afi>
  <safi>unicast</safi>
  <activate />
  <default-peer-route-map-name />
  <peer-route-reflector />
</state>
<route-map-filters>
  <route-map-filter>
    <route-map-direction>in</route-map-
direction>
                                <config>
                                <route-map-direction>in</route-map-
direction>
                                <route-map-name>in-map</route-map-
name>
                                </config>
                                <state>
                                <route-map-direction>in</route-map-
direction>
                                <route-map-name>in-map</route-map-
name>
                                </state>
                                </route-map-filter>
  <route-map-filter>
    <route-map-direction>out</route-map-
direction>
                                <config>
                                <route-map-direction>out</route-map-
direction>
                                <route-map-name>out-map</route-map-
name>
                                </config>
                                <state>
                                <route-map-direction>out</route-map-
direction>
                                <route-map-name>out-map</route-map-
name>
                                </state>
                                </route-map-filter>
  </route-map-filters>
</address-family>
</address-families>
</peer-group>
<peer-group>
  <peer-group-tag>peer1</peer-group-tag>

```

```

    <bgp-passwords>
      <bgp-password>
        <password>0x9a20ef22549ad84b</password>
        <config>
          <password>0x9a20ef22549ad84b</password>
          <auth-key-encrypt>1</auth-key-encrypt>
        </config>
        <state>
          <password>0x9a20ef22549ad84b</password>
          <auth-key-encrypt>1</auth-key-encrypt>
        </state>
      </bgp-password>
    </bgp-passwords>
  <config>
    <peer-group-tag>peer1</peer-group-tag>
    <peer-group-range>static</peer-group-range>
    <peer-as>200</peer-as>
  </config>
  <state>
    <peer-group-tag>peer1</peer-group-tag>
    <peer-group-range>static</peer-group-range>
    <peer-as>200</peer-as>
  </state>
  <ebgp-multihop>
    <config>
      <enabled />
    </config>
    <state>
      <enabled />
    </state>
  </ebgp-multihop>
  <address-families>
    <address-family>
      <afi>ipv4</afi>
      <safi>labeled-unicast</safi>
      <config>
        <afi>ipv4</afi>
        <safi>labeled-unicast</safi>
        <activate />
      </config>
      <state>
        <afi>ipv4</afi>
        <safi>labeled-unicast</safi>
        <activate />
      </state>
    </address-family>
  </address-families>
</peer-group>
<peer-group>
  <peer-group-tag>peer2</peer-group-tag>
  <bgp-passwords>
    <bgp-password>
      <password>0x9603e78694ace534e74f24019f5bfeb5</
password>
      <config>
        <password>0x9603e78694ace534e74f24019f5bfeb5</
password>

```



```

    <auth-key-encrypt>1</auth-key-encrypt>
  </config>
  <state>
    <password>0x9603e78694ace534e74f24019f5bfeb5</
password>
    <auth-key-encrypt>1</auth-key-encrypt>
  </state>
</bgp-password>
</bgp-passwords>
<config>
  <peer-group-tag>peer2</peer-group-tag>
  <peer-group-range>static</peer-group-range>
  <peer-as>300</peer-as>
  <enable-peer-bfd />
</config>
<state>
  <peer-group-tag>peer2</peer-group-tag>
  <peer-group-range>static</peer-group-range>
  <peer-as>300</peer-as>
  <enable-peer-bfd />
</state>
<ebgp-multihop>
  <config>
    <maximum-hop-count>10</maximum-hop-count>
    <enabled />
  </config>
  <state>
    <maximum-hop-count>10</maximum-hop-count>
    <enabled />
  </state>
</ebgp-multihop>
<address-families>
  <address-family>
    <afi>ipv6</afi>
    <safi>labeled-unicast</safi>
    <maximum-prefixes>
      <maximum-prefix>
        <prefix-count>1</prefix-count>
        <config>
          <prefix-count>1</prefix-count>
          <maximum-prefix-warning />
        </config>
        <state>
          <prefix-count>1</prefix-count>
          <maximum-prefix-warning />
        </state>
      </maximum-prefix>
    </maximum-prefixes>
    <config>
      <afi>ipv6</afi>
      <safi>labeled-unicast</safi>
      <activate />
    </config>
    <state>
      <afi>ipv6</afi>
      <safi>labeled-unicast</safi>
      <activate />

```

```

        </state>
      </address-family>
    </address-families>
  </peer-group>
</peer-groups>
</bgp-instance>
</bgp-instances>
</bgp>

```

Validation with NetConf get

Here is a NetConf validation response that defines several aspects of BGP, including global BGP configuration, peer groups, and AFI-SAFIs for different address families. The configuration also includes authentication settings, timers, transport settings, and route reflection.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
        <name>100</name>
        <bgp>
          <global>
            <config>
              <as>100</as>
            </config>
            <route-selection-options>

```

```

    <config>
      <enable-aigp>true</enable-aigp>
    </config>
    <state>
      <enable-aigp>true</enable-aigp>
    </state>
  </route-selection-options>
  <state>
    <as>100</as>
    <total-prefixes>0</total-prefixes>
  </state>
  <afi-safis>
    <afi-safi>
      <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
      <config>
        <afi-safi-name
          xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
          <enabled>true</enabled>
        </config>
      </afi-safi>
    <afi-safi>
      <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_LABELED_UNICAST</afi-safi-name>
      <config>
        <afi-safi-name
          xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_LABELED_UNICAST</afi-safi-name>
          <enabled>true</enabled>
        </config>
      </afi-safi>
    <afi-safi>
      <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_LABELED_UNICAST</afi-safi-name>
      <config>
        <afi-safi-name
          xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_LABELED_UNICAST</afi-safi-name>
          <enabled>true</enabled>
        </config>
      </afi-safi>
    <afi-safi>
      <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L3VPN_IPV6_UNICAST</afi-safi-name>
      <config>
        <afi-safi-name
          xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L3VPN_IPV6_UNICAST</afi-safi-name>
          <enabled>true</enabled>
        </config>
      </afi-safi>
    </afi-safis>
  </global>

```

```

    <peer-groups>
      <peer-group>
        <peer-group-name>ABC</peer-group-name>
        <config>
          <auth-password>0x9603e78694ace534ea912b9ab53f8a55</auth-
password>
          <peer-group-name>ABC</peer-group-name>
          <peer-as>100</peer-as>
          <description>Non VRF peer-group configs</description>
        </config>
        <state>
          <auth-password>0x9603e78694ace534ea912b9ab53f8a55</auth-
password>
          <peer-group-name>ABC</peer-group-name>
          <peer-as>100</peer-as>
          <description>Non VRF peer-group configs</description>
        </state>
        <enable-bfd>
          <config>
            <enabled>true</enabled>
          </config>
          <state>
            <enabled>true</enabled>
          </state>
        </enable-bfd>
        <timers>
          <config>
            <connect-retry>300.00</connect-retry>
            <minimum-advertisement-interval>20.00</minimum-
advertisement-interval>
            <keepalive-interval>300.00</keepalive-interval>
            <hold-time>8200.00</hold-time>
          </config>
          <state>
            <connect-retry>300.00</connect-retry>
            <minimum-advertisement-interval>20.00</minimum-
advertisement-interval>
            <keepalive-interval>300.00</keepalive-interval>
            <hold-time>8200.00</hold-time>
          </state>
        </timers>
        <transport>
          <config>
            <local-address>10.1.1.1</local-address>
            <passive-mode>true</passive-mode>
          </config>
          <state>
            <local-address>10.1.1.1</local-address>
            <passive-mode>true</passive-mode>
          </state>
        </transport>
        <afi-safis>
          <afi-safi>
            <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
            <ipv4-unicast>
              <prefix-limit>

```

```

    <config>
      <max-prefixes>4294967295</max-prefixes>
      <warning-threshold-pct>100</warning-threshold-pct>
      <prevent-teardown>true</prevent-teardown>
    </config>
    <state>
      <max-prefixes>4294967295</max-prefixes>
      <warning-threshold-pct>100</warning-threshold-pct>
      <prevent-teardown>true</prevent-teardown>
    </state>
  </prefix-limit>
  <config>
    <send-default-route>true</send-default-route>
  </config>
  <state>
    <send-default-route>true</send-default-route>
  </state>
</ipv4-unicast>
<config>
  <afi-safi-name
    xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
    <enabled>true</enabled>
  </config>
  <state>
    <afi-safi-name
      xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
      <enabled>true</enabled>
    </state>
  <apply-policy>
    <config>
      <import-policy>in-map</import-policy>
      <export-policy>out-map</export-policy>
    </config>
    <state>
      <import-policy>in-map</import-policy>
      <export-policy>out-map</export-policy>
    </state>
  </apply-policy>
</afi-safi>
</afi-safis>
<route-reflector>
  <config>
    <route-reflector-client>true</route-reflector-client>
  </config>
  <state>
    <route-reflector-client>true</route-reflector-client>
  </state>
</route-reflector>
</peer-group>
<peer-group>
  <peer-group-name>peer1</peer-group-name>
  <config>
    <auth-password>0x9a20ef22549ad84b</auth-password>
    <peer-group-name>peer1</peer-group-name>
    <peer-as>200</peer-as>

```

```

</config>
<state>
  <auth-password>0x9a20ef22549ad84b</auth-password>
  <peer-group-name>peer1</peer-group-name>
  <peer-as>200</peer-as>
</state>
<ebgp-multihop>
  <config>
    <enabled>true</enabled>
  </config>
  <state>
    <enabled>true</enabled>
  </state>
</ebgp-multihop>
<afi-safis>
  <afi-safi>
    <afi-safi-name
      xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_LABELED_UNICAST</afi-safi-name>
    <config>
      <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_LABELED_UNICAST</afi-safi-name>
      <enabled>true</enabled>
    </config>
    <state>
      <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_LABELED_UNICAST</afi-safi-name>
      <enabled>true</enabled>
    </state>
  </afi-safi>
</afi-safis>
</peer-group>
<peer-group>
  <peer-group-name>peer2</peer-group-name>
  <config>
    <auth-password>0x9603e78694ace534e74f24019f5bfeb5</auth-
password>
    <peer-group-name>peer2</peer-group-name>
    <peer-as>300</peer-as>
  </config>
  <state>
    <auth-password>0x9603e78694ace534e74f24019f5bfeb5</auth-
password>
    <peer-group-name>peer2</peer-group-name>
    <peer-as>300</peer-as>
  </state>
  <enable-bfd>
    <config>
      <enabled>true</enabled>
    </config>
    <state>
      <enabled>true</enabled>
    </state>
  </enable-bfd>
</ebgp-multihop>
<config>

```

```

        <multihop-ttl>10</multihop-ttl>
        <enabled>true</enabled>
    </config>
    <state>
        <enabled>true</enabled>
        <multihop-ttl>10</multihop-ttl>
    </state>
</ebgp-multihop>
<afi-safis>
    <afi-safi>
        <afi-safi-name
types">oc-bgp-types:IPV6_LABELED_UNICAST</afi-safi-name>
        <ipv6-labeled-unicast>
            <prefix-limit>
                <config>
                    <max-prefixes>1</max-prefixes>
                    <prevent-teardown>true</prevent-teardown>
                </config>
                <state>
                    <max-prefixes>1</max-prefixes>
                    <prevent-teardown>true</prevent-teardown>
                </state>
            </prefix-limit>
        </ipv6-labeled-unicast>
    </config>
        <afi-safi-name
types">oc-bgp-types:IPV6_LABELED_UNICAST</afi-safi-name>
        <enabled>true</enabled>
    </config>
    <state>
        <afi-safi-name
types">oc-bgp-types:IPV6_LABELED_UNICAST</afi-safi-name>
        <enabled>true</enabled>
    </state>
</afi-safi>
<afi-safi>
    <afi-safi-name
types">oc-bgp-types:L3VPN_IPV6_UNICAST</afi-safi-name>
    <l3vpn-ipv6-unicast>
        <prefix-limit>
            <config>
                <max-prefixes>12345</max-prefixes>
            </config>
            <state>
                <max-prefixes>12345</max-prefixes>
            </state>
        </prefix-limit>
    </l3vpn-ipv6-unicast>
</config>
    <afi-safi-name
types">oc-bgp-types:L3VPN_IPV6_UNICAST</afi-safi-name>
    <enabled>true</enabled>
</config>

```

```

        <state>
          <afi-safi-name
            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L3VPN_IPV6_UNICAST</afi-safi-name>
          <enabled>true</enabled>
        </state>
      </afi-safi>
    </afi-safis>
  </peer-group>
</peer-groups>
</bgp>
</protocol>
</protocols>
</network-instance>
</network-instances>

```

Restrictions

- The first time `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/peer-groups` and `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/neighbors` paths are configured, those configuration needs the respective **AFI-SAFI** configuration that is present to indicate **AFI** type:

```
/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/neighbors/
neighbor/afi-safis
```

```
/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/peer-groups/
peer-group/afi-safis
```

The above information is necessary for the OcNOS model to generate the following paths:

```
/ipi-bgp:bgp/bgpp-instances/bgpp-instance/address-families
```

```
/ipi-bgp:bgp/bgpp-instances/bgpp-instance/peer-groups/peer-group/address-families
```

```
/ipi-bgp:bgp/bgpp-instances/bgpp-instance/address-family-vrfs
```

- After the `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/peer-groups` and `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/neighbors` paths are configured on equipment, on the further configurations on those paths the user does not need to indicate the AFI-SAFI, the translation will look for this information on the equipment database.

Create BGP Peer-groups with User-defined VRFs

This XML configuration snippet is used to configure BGP Peer-groups with user-defined VRFs. Peer groups are configurations that can be used elsewhere without the need to repeat them.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload that provides a structured representation of the settings for various BGP configurations, such as Autonomous System (AS) numbers, Address Family Identifier and Subsequent Address Family Identifier (AFI-SAFI) settings, authentication, timers, and more.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
types:BGP xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
        </identifier>
        <name>100</name>
        <bgp>
          <global>
            <config>
              <as>100</as>
            </config>
            <route-selection-options>
              <config>
                <enable-aigp>true</enable-aigp>
              </config>
              <state>
                <enable-aigp>true</enable-aigp>
              </state>
            </route-selection-options>
          </global>
        </bgp>
      </protocol>
    </protocols>
  </network-instance>
  <network-instance>
    <name>management</name>
  </network-instance>
  <network-instance>
    <name>vrfA</name>
    <protocols>
      <protocol>
        <identifier
types:BGP xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
        </identifier>
        <name>100</name>
        <bgp>
          <global>
            <config>
              <as>100</as>
            </config>
            <afi-safis>
              <afi-safi>
                <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                <config>
                  <afi-safi-name
```

```

        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
        <enabled>true</enabled>
    </config>
</afi-safi>
</afi-safis>
</global>
<peer-groups>
    <peer-group>
        <peer-group-name>peerA</peer-group-name>
        <afi-safis>
            <afi-safi>
                <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                <ipv4-unicast>
                    <prefix-limit>
                        <config>
                            <max-prefixes>2331</max-prefixes>
                            <warning-threshold-pct>100</warning-threshold-pct>
                            <prevent-teardown>true</prevent-teardown>
                        </config>
                    </prefix-limit>
                </config>
                <send-default-route>true</send-default-route>
            </afi-safi>
        </afi-safis>
    </peer-group>
</peer-groups>
    <afi-safi>
        <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
        <enabled>true</enabled>
    </config>
</afi-safi>
</afi-safis>
<config>
    <auth-password>0x9603e78694ace534ea912b9ab53f8a55</auth-
password>
    <peer-group-name>peerA</peer-group-name>
    <peer-as>100</peer-as>
    <description>VRFA peer-group configs</description>
</config>
<transport>
    <config>
        <local-address>2.2.2.2</local-address>
        <passive-mode>true</passive-mode>
    </config>
</transport>
<timers>
    <config>
        <connect-retry>900.00</connect-retry>
        <minimum-advertisement-interval>65535.00</minimum-
advertisement-interval>
        <keepalive-interval>100.00</keepalive-interval>
        <hold-time>300.00</hold-time>
    </config>
</timers>
<enable-bfd>

```

```

        <config>
            <enabled>true</enabled>
        </config>
    </enable-bfd>
    <route-reflector>
        <config>
            <route-reflector-client>true</route-reflector-client>
        </config>
    </route-reflector>
</peer-group>
</peer-groups>
</bgp>
</protocol>
</protocols>
</network-instance>
<network-instance>
    <name>vrfB</name>
    <protocols>
        <protocol>
            <identifier
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
            <name>100</name>
            <bgp>
                <global>
                    <config>
                        <as>100</as>
                    </config>
                    <afi-safis>
                        <afi-safi>
                            <afi-safi-name
                                xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
                            <config>
                                <afi-safi-name
                                    xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
                                    <enabled>true</enabled>
                                </config>
                            </afi-safi>
                        </afi-safis>
                    </global>
                    <peer-groups>
                        <peer-group>
                            <peer-group-name>peerB</peer-group-name>
                            <afi-safis>
                                <afi-safi>
                                    <afi-safi-name
                                        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
                                    <ipv6-unicast>
                                        <prefix-limit>
                                            <config>
                                                <max-prefixes>3123</max-prefixes>
                                                <prevent-teardown>true</prevent-teardown>
                                            </config>
                                        </prefix-limit>

```

```

        <config>
          <send-default-route>true</send-default-route>
        </config>
      </ipv6-unicast>
    <config>
      <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
      <enabled>true</enabled>
    </config>
  </afi-safi>
</afi-safis>
<config>
  <auth-password>0x9a20ef22549ad84b</auth-password>
  <peer-group-name>peerB</peer-group-name>
  <peer-as>200</peer-as>
  <local-as>300</local-as>
  <description>VRFB peer-group configs</description>
</config>
<enable-bfd>
  <config>
    <enabled>true</enabled>
  </config>
</enable-bfd>
<ebgp-multihop>
  <config>
    <multihop-ttl>100</multihop-ttl>
    <enabled>true</enabled>
  </config>
</ebgp-multihop>
</peer-group>
</peer-groups>
</bgp>
</protocol>
</protocols>
</network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI commands are used to setup the VRF instances and BGP settings within a network infrastructure. VRFs allow for the segmentation of the network, enabling the isolation of routing domains. In this configuration, two VRFs, named `vrfA` and `vrfB`, are defined with unique Route Distinguisher (RD) values, indicating their separation.

Within the BGP configuration, specific address families for IPv4 and IPv6 are defined, each associated with a corresponding VRF. Peer-groups, neighbors, authentication keys, timers, and various other BGP parameters are configured to facilitate routing and peering relationships in the network.

```

!
ip vrf vrfA
  rd 1:1
!
ip vrf vrfB
  rd 1:2
!
!
router bgp 100

```

```

!
address-family ipv4 vrf vrfA
neighbor peerA peer-group
neighbor peerA remote-as 100
neighbor peerA fall-over bfd
neighbor peerA activate
neighbor peerA authentication-key 0x9603e78694ace534ea912b9ab53f8a55
neighbor peerA route-reflector-client
neighbor peerA default-originate
neighbor peerA maximum-prefix 2331 100 warning-only
neighbor peerA description VRFA peer-group configs
neighbor peerA passive
neighbor peerA update-source 2.2.2.2
neighbor peerA advertisement-interval 65535
neighbor peerA timers 100 300
neighbor peerA timers connect 900
exit-address-family
!
address-family ipv6 vrf vrfB
neighbor peerB peer-group
neighbor peerB remote-as 200
neighbor peerB local-as 300
neighbor peerB fall-over bfd multihop
neighbor peerB activate
neighbor peerB authentication-key 0x9a20ef22549ad84b
neighbor peerB default-originate
neighbor peerB maximum-prefix 3123 warning-only
neighbor peerB description VRFB peer-group configs
neighbor peerB ebgp-multihop 100
exit-address-family
!

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload that illustrates a comprehensive BGP configuration. The configuration is divided into specific sections, each addressing different aspects of BGP operation, security, and peering.

Within this payload, two distinct AFI and SAFI contexts are defined for IPv4 and IPv6 in separate VRF instances named `vrfA` and `vrfB`. Each VRF is associated with specific BGP peer groups, peers, and a range of configurations that dictate the behavior of BGP in these contexts.

The configuration also includes authentication keys, prefix limits, timers, route reflection settings, BFD configuration, and other essential parameters that ensure the proper functioning of BGP in the specified VRFs.

```

<bgp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp">
  <bgp-instances>
    <bgp-instance>
      <bgp-as>100</bgp-as>
      <config>
        <bgp-as>100</bgp-as>
      </config>
      <state>
        <bgp-as>100</bgp-as>
        <version>4</version>
        <table-version>1</table-version>
        <total-prefixes>0</total-prefixes>
      </state>
    </bgp-instance>
  </bgp-instances>
</bgp>

```

```

address>      <router-run-time-ip-address>0.0.0.0</router-run-time-ip-
               <scan-remain-time>36</scan-remain-time>
               </state>
               <rib>
                 <address-family>
                   <safi>link-state</safi>
                   <afi>link-state</afi>
                   <state>
                     <safi>link-state</safi>
                     <afi>link-state</afi>
                   </state>
                 </address-family>
               </rib>
               <address-family-vrfs>
                 <address-family-vrf>
                   <afi>ipv4</afi>
                   <safi>unicast</safi>
                   <vrf-name>vrfA</vrf-name>
                   <config>
                     <afi>ipv4</afi>
                     <safi>unicast</safi>
                     <vrf-name>vrfA</vrf-name>
                   </config>
                   <state>
                     <afi>ipv4</afi>
                     <safi>unicast</safi>
                     <vrf-name>vrfA</vrf-name>
                   </state>
                 <peer-groups>
                   <peer-group>
                     <peer-group-tag>peerA</peer-group-tag>
                     <bgp-passwords>
                       <bgp-password>
<password>0x9603e78694ace534ea912b9ab53f8a55</password>
                           <config>
<password>0x9603e78694ace534ea912b9ab53f8a55</password>
                               <auth-key-encrypt>1</auth-key-encrypt>
                               </config>
                               <state>
<password>0x9603e78694ace534ea912b9ab53f8a55</password>
                               <auth-key-encrypt>1</auth-key-encrypt>
                               </state>
                             </bgp-password>
                           </bgp-passwords>
                         <maximum-prefixes>
                           <maximum-prefix>
                             <prefix-count>2331</prefix-count>
                             <config>
                               <prefix-count>2331</prefix-count>
                               <threshold-percentage>100</threshold-
percentage>
                                   <warning-only />
                                   </config>
                                   <state>

```

```

percentage>
    <prefix-count>2331</prefix-count>
    <threshold-percentage>100</threshold-
percentage>
    <warning-only />
  </state>
</maximum-prefix>
</maximum-prefixes>
<config>
  <peer-group-tag>peerA</peer-group-tag>
  <peer-group-range>static</peer-group-range>
  <peer-as>100</peer-as>
  <source-identifier>2.2.2.2</source-identifier>
  <peer-connection-interval>900</peer-
connection-interval>
  <neighbor-passive />
  <min-route-advertisement-interval>65535</min-
route-advertisement-interval>
  <peer-description>VRFA peer-group configs</
peer-description>
  <enable-peer-bfd />
  <activate />
  <default-peer-route-map-name />
  <peer-route-reflector />
</config>
<state>
  <peer-group-tag>peerA</peer-group-tag>
  <peer-group-range>static</peer-group-range>
  <peer-as>100</peer-as>
  <source-identifier>2.2.2.2</source-identifier>
  <peer-connection-interval>900</peer-
connection-interval>
  <neighbor-passive />
  <min-route-advertisement-interval>65535</min-
route-advertisement-interval>
  <peer-description>VRFA peer-group configs</
peer-description>
  <enable-peer-bfd />
  <activate />
  <default-peer-route-map-name />
  <peer-route-reflector />
</state>
<timers>
  <config>
    <keep-alive>100</keep-alive>
    <hold-time>300</hold-time>
  </config>
  <state>
    <keep-alive>100</keep-alive>
    <hold-time>300</hold-time>
  </state>
</timers>
</peer-group>
</peer-groups>
</address-family-vrf>
<address-family-vrf>
  <afi>ipv6</afi>
  <safi>unicast</safi>
  <vrf-name>vrfB</vrf-name>

```

```

<config>
  <afi>ipv6</afi>
  <safi>unicast</safi>
  <vrf-name>vrfB</vrf-name>
</config>
<state>
  <afi>ipv6</afi>
  <safi>unicast</safi>
  <vrf-name>vrfB</vrf-name>
</state>
<peer-groups>
  <peer-group>
    <peer-group-tag>peerB</peer-group-tag>
    <bgp-passwords>
      <bgp-password>
        <password>0x9a20ef22549ad84b</password>
        <config>
          <password>0x9a20ef22549ad84b</
password>
          <auth-key-encrypt>1</auth-key-encrypt>
        </config>
        <state>
          <password>0x9a20ef22549ad84b</
password>
          <auth-key-encrypt>1</auth-key-encrypt>
        </state>
      </bgp-password>
    </bgp-passwords>
    <maximum-prefixes>
      <maximum-prefix>
        <prefix-count>3123</prefix-count>
        <config>
          <prefix-count>3123</prefix-count>
          <maximum-prefix-warning />
        </config>
        <state>
          <prefix-count>3123</prefix-count>
          <maximum-prefix-warning />
        </state>
      </maximum-prefix>
    </maximum-prefixes>
    <config>
      <peer-group-tag>peerB</peer-group-tag>
      <peer-group-range>static</peer-group-range>
      <peer-as>200</peer-as>
      <peer-local-as>300</peer-local-as>
      <peer-description>VRFB peer-group configs</
peer-description>
      <enable-peer-bfd />
      <enable-peer-bfd-multihop />
      <activate />
      <default-peer-route-map-name />
    </config>
    <state>
      <peer-group-tag>peerB</peer-group-tag>
      <peer-group-range>static</peer-group-range>
      <peer-as>200</peer-as>

```



```

peer-description>
    <peer-local-as>300</peer-local-as>
    <peer-description>VRFB peer-group configs</
    <enable-peer-bfd />
    <enable-peer-bfd-multihop />
    <activate />
    <default-peer-route-map-name />
  </state>
  <ebgp-multihop>
    <config>
      <maximum-hop-count>100</maximum-hop-count>
      <enabled />
    </config>
    <state>
      <maximum-hop-count>100</maximum-hop-count>
      <enabled />
    </state>
  </ebgp-multihop>
</peer-group>
</peer-groups>
</address-family-vrf>
</address-family-vrfs>
</bgp-instance>
</bgp-instances>
</bgp>

```

Validation with NetConf get

Here is a NetConf validation response that specifies different network instances, including the default, management, vrfA, and vrfB instances.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
        <name>100</name>
        <bgp>
          <global>
            <config>
              <as>100</as>
            </config>
            <route-selection-options>
              <config>
                <enable-aigp>true</enable-aigp>
              </config>
              <state>
                <enable-aigp>true</enable-aigp>
              </state>
            </route-selection-options>
            <state>
              <as>100</as>
              <total-prefixes>0</total-prefixes>
            </state>
          </global>
        </bgp>
      </protocol>
    </protocols>
  </network-instance>
</network-instances>

```

```

        </global>
    </bgp>
</protocol>
</protocols>
</network-instance>
<network-instance>
    <name>management</name>
</network-instance>
<network-instance>
    <name>vrfA</name>
    <protocols>
        <protocol>
            <identifier
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
            <name>100</name>
            <bgp>
                <global>
                    <config>
                        <as>100</as>
                    </config>
                    <afi-safis>
                        <afi-safi>
                            <afi-safi-name
                                xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                                <config>
                                    <afi-safi-name
                                        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                                        <enabled>true</enabled>
                                    </config>
                                    <state>
                                        <afi-safi-name
                                            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                                        </state>
                                    </afi-safi>
                                </afi-safis>
                            <state>
                                <as>100</as>
                            </state>
                        </global>
                        <peer-groups>
                            <peer-group>
                                <peer-group-name>peerA</peer-group-name>
                                <afi-safis>
                                    <afi-safi>
                                        <afi-safi-name
                                            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                                            <ipv4-unicast>
                                                <prefix-limit>
                                                    <config>
                                                        <max-prefixes>2331</max-prefixes>
                                                        <warning-threshold-pct>100</warning-threshold-pct>
                                                        <prevent-teardown>true</prevent-teardown>
                                                    </config>

```

```

        <state>
            <max-prefixes>2331</max-prefixes>
            <warning-threshold-pct>100</warning-threshold-pct>
            <prevent-teardown>true</prevent-teardown>
        </state>
    </prefix-limit>
    <config>
        <send-default-route>true</send-default-route>
    </config>
    <state>
        <send-default-route>true</send-default-route>
    </state>
</ipv4-unicast>
<config>
    <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
        <enabled>true</enabled>
    </config>
    <state>
        <afi-safi-name
            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
            <enabled>true</enabled>
        </state>
    </afi-safi>
</afi-safis>
<config>
    <auth-password>0x9603e78694ace534ea912b9ab53f8a55</auth-
password>
    <peer-group-name>peerA</peer-group-name>
    <peer-as>100</peer-as>
    <description>VRFA peer-group configs</description>
</config>
    <state>
        <auth-password>0x9603e78694ace534ea912b9ab53f8a55</auth-
password>
        <peer-group-name>peerA</peer-group-name>
        <peer-as>100</peer-as>
        <description>VRFA peer-group configs</description>
    </state>
    <transport>
        <config>
            <local-address>2.2.2.2</local-address>
            <passive-mode>true</passive-mode>
        </config>
        <state>
            <local-address>2.2.2.2</local-address>
            <passive-mode>true</passive-mode>
        </state>
    </transport>
    <timers>
        <config>
            <connect-retry>900.00</connect-retry>
            <minimum-advertisement-interval>65535.00</minimum-
advertisement-interval>
            <keepalive-interval>100.00</keepalive-interval>
            <hold-time>300.00</hold-time>

```

```

        </config>
        <state>
            <connect-retry>900.00</connect-retry>
            <minimum-advertisement-interval>65535.00</minimum-
advertisement-interval>
            <keepalive-interval>100.00</keepalive-interval>
            <hold-time>300.00</hold-time>
        </state>
    </timers>
    <enable-bfd>
        <config>
            <enabled>true</enabled>
        </config>
        <state>
            <enabled>true</enabled>
        </state>
    </enable-bfd>
    <route-reflector>
        <config>
            <route-reflector-client>true</route-reflector-client>
        </config>
        <state>
            <route-reflector-client>true</route-reflector-client>
        </state>
    </route-reflector>
</peer-group>
</peer-groups>
</bgp>
</protocol>
</protocols>
</network-instance>
<network-instance>
    <name>vrfB</name>
    <protocols>
        <protocol>
            <identifier
xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
            <name>100</name>
            <bgp>
                <global>
                    <config>
                        <as>100</as>
                    </config>
                    <afi-safis>
                        <afi-safi>
                            <afi-safi-name
xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
                            <config>
                                <afi-safi-name
xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
                                <enabled>true</enabled>
                            </config>
                            <state>
                                <afi-safi-name

```

```

        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
        </state>
    </afi-safi>
</afi-safis>
<state>
    <as>100</as>
</state>
</global>
<peer-groups>
    <peer-group>
        <peer-group-name>peerB</peer-group-name>
        <afi-safis>
            <afi-safi>
                <afi-safi-name
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
                <ipv6-unicast>
                    <prefix-limit>
                        <config>
                            <max-prefixes>3123</max-prefixes>
                            <prevent-teardown>true</prevent-teardown>
                        </config>
                        <state>
                            <max-prefixes>3123</max-prefixes>
                            <prevent-teardown>true</prevent-teardown>
                        </state>
                    </prefix-limit>
                    <config>
                        <send-default-route>true</send-default-route>
                    </config>
                    <state>
                        <send-default-route>true</send-default-route>
                    </state>
                </ipv6-unicast>
            </config>
            <afi-safi-name
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
            <enabled>true</enabled>
        </config>
        <state>
            <afi-safi-name
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
            <enabled>true</enabled>
        </state>
        </afi-safi>
    </afi-safis>
</config>
    <auth-password>0x9a20ef22549ad84b</auth-password>
    <peer-group-name>peerB</peer-group-name>
    <peer-as>200</peer-as>
    <local-as>300</local-as>
    <description>VRFB peer-group configs</description>
</config>
<state>

```

```

        <auth-password>0x9a20ef22549ad84b</auth-password>
        <peer-group-name>peerB</peer-group-name>
        <peer-as>200</peer-as>
        <local-as>300</local-as>
        <description>VRFB peer-group configs</description>
    </state>
    <enable-bfd>
        <config>
            <enabled>true</enabled>
        </config>
        <state>
            <enabled>true</enabled>
        </state>
    </enable-bfd>
    <ebgp-multihop>
        <config>
            <multihop-ttl>100</multihop-ttl>
            <enabled>true</enabled>
        </config>
        <state>
            <enabled>true</enabled>
            <multihop-ttl>100</multihop-ttl>
        </state>
    </ebgp-multihop>
</peer-group>
</peer-groups>
</bgp>
</protocol>
</protocols>
</network-instance>
</network-instances>

```

Restrictions

- The first time `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/peer-groups` and `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/neighbors` paths are configured, those configuration needs the respective **AFI-SAFI** configuration that is present to indicate **AFI** type:

```
/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/neighbors/neighbor/afi-safis
```

```
/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/peer-groups/peer-group/afi-safis
```

The above information is necessary for the OcNOS model to generate the following paths:

```
/ipi-bgp:bgp/bgp-instances/bgp-instance/address-families
```

```
/ipi-bgp:bgp/bgp-instances/bgp-instance/peer-groups/peer-group/address-families
```

```
/ipi-bgp:bgp/bgp-instances/bgp-instance/address-family-vrfs
```

- After the `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/peer-groups` and `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/neighbors` paths are configured on equipment, on the further configurations on those paths the user need not indicate the AFI-SAFI as the translation will look for this information on the equipment database.

Configure Update-source on Neighbor

This XML configuration snippet is used to specify the configuration of the `update-source` parameter on a neighbor in the context of a network device configuration. This XML configuration allows internal BGP sessions to use any operating interface for TCP connections.

Release

This configuration was introduced in OcNOS version 5.0.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload that specifies the configuration of a network instance named `default` with BGP. Within this network instance, a BGP peer or neighbor is configured to establish a connection with the IP address `1.1.1.1` and share IPv4 unicast routing information.

In this payload, various parameters such as the local address, peer AS, and AFI-SAFI are configured to enable communication and routing between BGP neighbors.

This XML configuration allows internal BGP sessions to use any available operating interface for establishing TCP connections.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">
        <identifier>oc-pol-types:BGP</identifier>
        <name>100</name>
        <config>
          <identifier>oc-pol-types:BGP</identifier>
          <name>100</name>
          <enabled>true</enabled>
        </config>
      <bgp>
        <global>
          <config>
            <as>100</as>
          </config>
        </global>
        <neighbors>
          <neighbor>
            <afi-safis>
              <afi-safi>
                <afi-safi-name xmlns:oc-bgp-types="http://
openconfig.net/yang/bgp-types">oc-bgp-types:IPv4_UNICAST</afi-safi-name>
                <config>
                  <afi-safi-name xmlns:oc-bgp-types="http://
openconfig.net/yang/bgp-types">oc-bgp-types:IPv4_UNICAST</afi-safi-name>
                  <enabled>true</enabled>
                </config>
              </afi-safi>
            </afi-safis>
            <neighbor-address>1.1.1.1</neighbor-address>
          </config>
        </neighbor>
      </neighbors>
    </bgp>
  </protocol>
</protocols>
</network-instance>
</network-instances>
```

```

        <neighbor-address>1.1.1.1</neighbor-address>
        <peer-as>100</peer-as>
    </config>
</transport>
<config>
    <local-address>2.2.2.2</local-address>
</config>
</transport>
</neighbor>
</neighbors>
</bgp>
</protocol>
</protocols>
</network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI commands are to configure a BGP neighbor relationship within the BGP process running on a router with AS number 100. Specifically, it configures a BGP neighbor with the IP address 1.1.1.1, assigns it the same AS number (AS 100), and specifies that the local address for establishing the BGP connection should be 2.2.2.2. This `update-source` parameter ensures that the BGP sessions between the local router and the neighbor use the specified source IP address (2.2.2.2) for their TCP connections.

```

router bgp 100
neighbor 1.1.1.1 remote-as 100
neighbor 1.1.1.1 update-source 2.2.2.2
!

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload for a BGP instance with AS number 100 is defined. Within this instance, a BGP peer relationship is established with a neighbor having the IP address 1.1.1.1. The payload further specifies that the local router should use the source IP address 2.2.2.2 when communicating with this BGP peer, ensuring proper BGP session establishment and communication.

```

<bgp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp">
  <bgp-instances>
    <bgp-instance>
      <bgp-as>100</bgp-as>
      <config>
        <bgp-as>100</bgp-as>
      </config>
      <peers>
        <peer>
          <peer-address>1.1.1.1</peer-address>
          <config>
            <peer-address>1.1.1.1</peer-address>
            <source-identifier>2.2.2.2</source-identifier>
            <peer-as>100</peer-as>
          </config>
        </peer>
      </peers>
    </bgp-instance>
  </bgp-instances>
</bgp>

```


Validation with NetConf get

Here is a NetConf validation response describing the default network instance, along with its associated protocols. Notably, the response includes information about a BGP instance with an AS number of 100, illustrating its global and neighbor-specific settings. The BGP neighbor relationship is established with an IP address of 1.1.1.1 and is configured to use a local address of 2.2.2.2 for communication.

```
<network-instances xmlns="http://openconfig.net/yang/network-
instance">
  <network-instance>
    <name>default</name>
    <config>
      <name>default</name>
      <type
types">oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
      </config>
      <state>
        <name>default</name>
        <type
types">oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
      </state>
      <protocols>
        <protocol>
          <identifier
pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
          <name>DIRECTLY_CONNECTED</name>
          <config>
            <identifier
types">oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <enabled>true</enabled>
          </config>
          <state>
            <identifier
types">oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <enabled>true</enabled>
          </state>
        </protocol>
        <protocol>
          <identifier
pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
          <name>100</name>
          <config>
            <identifier
types">oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:BGP</identifier>
            <name>100</name>
            <enabled>true</enabled>
          </config>
          <bgp>
            <global>
```

```

    <config>
      <as>100</as>
    </config>
    <state>
      <as>100</as>
    </state>
  </global>
  <neighbors>
    <neighbor>
      <neighbor-address>1.1.1.1</neighbor-address>
      <afi-safis>
        <afi-safi>
          <afi-safi-name xmlns:oc-bgp-types="http://
openconfig.net/yang/bgp-types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
          <config>
            <afi-safi-name xmlns:oc-bgp-types="http://
openconfig.net/yang/bgp-types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
            <enabled>true</enabled>
          </config>
        </afi-safi>
      </afi-safis>
    </neighbor>
  </neighbors>
  <config>
    <neighbor-address>1.1.1.1</neighbor-address>
    <peer-as>100</peer-as>
  </config>
  <transport>
    <config>
      <local-address>2.2.2.2</local-address>
    </config>
    <state>
      <local-address>2.2.2.2</local-address>
    </state>
  </transport>
  <state>
    <neighbor-address>1.1.1.1</neighbor-address>
    <peer-as>100</peer-as>
  </state>
</neighbor>
</neighbors>
</bgp>
<state>
  <enabled>true</enabled>
  <identifier
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:BGP</identifier>
  <name>100</name>
</state>
</protocol>
</protocols>
</network-instance>
</network-instances>

```

Restrictions

None

Double Link in Load Balance

In this XML configuration snippet, two links are used to ensure service availability, and all traffic is routed through both links simultaneously. If either of these links experiences a failure, all traffic is automatically redirected to the remaining available link.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload to indicate the configuration of a network instance named TEST_A9 with associated BGP protocols and peer groups. In this scenario, two peer groups, PPAL_BGP_L3 and BCK_BGP_L3, are defined within BGP, each with its specific settings. The configuration also specifies the use of multiple paths for external BGP (eBGP) sessions and enables IPv4 unicast address families for these peer groups. Furthermore, it outlines neighbor configurations, including their addresses, peer group associations, and additional parameters like local and peer AS numbers.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>TEST_A9</name>
    <config>
      <name>TEST_A9</name>
      <type>L3VRF</type>
      <route-distinguisher>65000:100</route-distinguisher>
    </config>
    <protocols>
      <protocol>
        <identifier>BGP</identifier>
        <name>65000</name>
        <config>
          <identifier>BGP</identifier>
          <name>65000</name>
          <enabled>true</enabled>
        </config>
        <bgp>
          <peer-groups>
            <peer-group>
              <afi-safis>
                <afi-safi>
                  <afi-safi-name xmlns:oc-bgp-types="http://
openconfig.net/yang/bgp-types">oc-bgp-types:IPv4_UNICAST</afi-safi-name>
                  <config>
                    <afi-safi-name xmlns:oc-bgp-
types="http://openconfig.net/yang/bgp-types">oc-bgp-types:IPv4_UNICAST</afi-
safi-name>
                    <enabled>true</enabled>
                  </config>
                </afi-safi>
              </afi-safis>
              <peer-group-name>PPAL_BGP_L3</peer-group-name>
            <config>
              <peer-group-name>PPAL_BGP_L3</peer-group-name>
```

```

        <peer-as>18746</peer-as>
    </config>
</peer-group>
<peer-group>
    <afi-safis>
        <afi-safi>
            <afi-safi-name xmlns:oc-bgp-types="http://
openconfig.net/yang/bgp-types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
            <config>
                <afi-safi-name xmlns:oc-bgp-
types="http://openconfig.net/yang/bgp-types">oc-bgp-types:IPV4_UNICAST</afi-
safi-name>
                <enabled>true</enabled>
            </config>
        </afi-safi>
    </afi-safis>
    <peer-group-name>BCK_BGP_L3</peer-group-name>
    <config>
        <peer-group-name>BCK_BGP_L3</peer-group-name>
        <peer-as>18010</peer-as>
    </config>
</peer-group>
</peer-groups>
<global>
    <config>
        <as>65000</as>
    </config>
    <use-multiple-paths>
        <config>
            <enabled>true</enabled>
        </config>
    <ebgp>
        <config>
            <maximum-paths>2</maximum-paths>
        </config>
    </ebgp>
</use-multiple-paths>
</global>
<neighbors>
    <neighbor>
        <afi-safis>
            <afi-safi>
                <afi-safi-name xmlns:oc-bgp-types="http://
openconfig.net/yang/bgp-types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                <config>
                    <afi-safi-name xmlns:oc-bgp-
types="http://openconfig.net/yang/bgp-types">oc-bgp-types:IPV4_UNICAST</afi-
safi-name>
                    <enabled>true</enabled>
                </config>
            </afi-safi>
        </afi-safis>
        <neighbor-address>172.17.30.2</neighbor-address>
    </config>
    <peer-group>PPAL_BGP_L3</peer-group>
    <neighbor-address>172.17.30.2</neighbor-
address>
    <peer-as>18747</peer-as>

```

```

        <local-as>65001</local-as>
        <description>PPAL_SESSION</description>
    </config>
</neighbor>
<neighbor>
    <afi-safis>
        <afi-safi>
            <afi-safi-name xmlns:oc-bgp-types="http://
openconfig.net/yang/bgp-types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
            <config>
                <afi-safi-name xmlns:oc-bgp-
types="http://openconfig.net/yang/bgp-types">oc-bgp-types:IPV4_UNICAST</afi-
safi-name>
                <enabled>true</enabled>
            </config>
        </afi-safi>
    </afi-safis>
    <neighbor-address>172.17.40.2</neighbor-address>
</config>
    <peer-group>BCK_BGP_L3</peer-group>
    <neighbor-address>172.17.40.2</neighbor-
address>

    <peer-as>18010</peer-as>
    <local-as>65002</local-as>
    <description>BCK_SESSION</description>
</config>
</neighbor>
</neighbors>
</bgp>
</protocol>
</protocols>
</network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI commands are used to create a specific VRF instance named `TEST_A9` with a unique route distinguisher (RD) of `65000:100`. Within the BGP configuration for AS number `65000`, two address families, IPv4 and IPv6, are defined for the `TEST_A9` VRF, each allowing up to two paths for eBGP (external BGP) sessions.

The configuration also includes the setup of neighbor relationships, with peers grouped into `PPAL_BGP_L3` and `BCK_BGP_L3` peer groups. Each neighbor is associated with the appropriate peer group, and their remote AS numbers and descriptions are specified.

```

!
ip vrf TEST_A9
  rd 65000:100
!
router bgp 65000
!
  address-family ipv4 vrf TEST_A9
    max-paths ebgp 2
    neighbor BCK_BGP_L3 peer-group
    neighbor BCK_BGP_L3 remote-as 18010
    neighbor BCK_BGP_L3 activate
    neighbor PPAL_BGP_L3 peer-group
    neighbor PPAL_BGP_L3 remote-as 18746

```

```

neighbor PPAL_BGP_L3 activate
neighbor 172.17.30.2 remote-as 18747
neighbor 172.17.30.2 peer-group PPAL_BGP_L3
neighbor 172.17.40.2 remote-as 18010
neighbor 172.17.40.2 peer-group BCK_BGP_L3
neighbor 172.17.30.2 description PPAL_SESSION
neighbor 172.17.40.2 description BCK_SESSION
exit-address-family
!
address-family ipv6 vrf TEST_A9
max-paths ebgp 2
exit-address-family
!

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload illustrating the configuration of a network instance with associated BGP settings. This configuration is designed to establish BGP sessions within the specified VRF instance and configure BGP-related parameters.

In this payload, the VRF instance type, BGP AS, BGP peering configurations for both IPv4 and IPv6 address families, and the maximum number of paths allowed for eBGP (external BGP) sessions are configured.

```

<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-network-
instance">
  <network-instance>
    <instance-name>TEST_A9</instance-name>
    <instance-type>vrf</instance-type>
    <config>
      <instance-name>TEST_A9</instance-name>
      <instance-type>vrf</instance-type>
    </config>
    <vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vrf">
      <config>
        <vrf-name>TEST_A9</vrf-name>
      </config>
      <bgp-vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp-vrf">
        <config>
          <rd-string>65000:100</rd-string>
        </config>
      </bgp-vrf>
    </vrf>
  </network-instance>
</network-instances>
<bgp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp">
  <bgp-instances>
    <bgp-instance>
      <bgp-as>65000</bgp-as>
      <config>
        <bgp-as>65000</bgp-as>
      </config>
      <address-family-vrfs>
        <address-family-vrf>
          <afi>ipv4</afi>
          <safi>unicast</safi>
          <vrf-name>TEST_A9</vrf-name>
          <vrf-peers>

```

```

        <vrf-peer>
        <peer-address>172.17.30.2</peer-address>
        <config>
        <peer-address>172.17.30.2</peer-address>
        <peer-as>18747</peer-as>
        <peer-description>PPAL_SESSION</peer-
description>
        <mapped-peer-group-tag-af>PPAL_BGP_L3</mapped-
peer-group-tag-af>
        </config>
        </vrf-peer>
        <vrf-peer>
        <peer-address>172.17.40.2</peer-address>
        <config>
        <peer-address>172.17.40.2</peer-address>
        <peer-as>18010</peer-as>
        <peer-description>BCK_SESSION</peer-
description>
        <mapped-peer-group-tag-af>BCK_BGP_L3</mapped-
peer-group-tag-af>
        </config>
        </vrf-peer>
    </vrf-peers>
    <config>
        <afi>ipv4</afi>
        <safi>unicast</safi>
        <vrf-name>TEST_A9</vrf-name>
    </config>
    <maximum-paths>
    <config>
        <ebgp-max-path>2</ebgp-max-path>
    </config>
    </maximum-paths>
    <peer-groups>
        <peer-group>
            <peer-group-tag>BCK_BGP_L3</peer-group-tag>
            <config>
                <peer-group-tag>BCK_BGP_L3</peer-group-tag>
                <peer-group-range>static</peer-group-range>
                <peer-as>18010</peer-as>
                <activate />
            </config>
        </peer-group>
        <peer-group>
            <peer-group-tag>PPAL_BGP_L3</peer-group-tag>
            <config>
                <peer-group-tag>PPAL_BGP_L3</peer-group-tag>
                <peer-group-range>static</peer-group-range>
                <peer-as>18746</peer-as>
                <activate />
            </config>
        </peer-group>
    </peer-groups>
</address-family-vrf>
<address-family-vrf>
    <afi>ipv6</afi>
    <safi>unicast</safi>

```

```

        <vrf-name>TEST_A9</vrf-name>
        <config>
            <afi>ipv6</afi>
            <safi>unicast</safi>
            <vrf-name>TEST_A9</vrf-name>
        </config>
        <maximum-paths>
            <config>
                <ebgp-max-path>2</ebgp-max-path>
            </config>
        </maximum-paths>
    </address-family-vrf>
</address-family-vrfs>
</bgp-instance>
</bgp-instances>
</bgp>

```

Validation with NetConf get

Here is a NetConf validation response about the network instance's configuration, the BGP AS number, BGP peering details, and protocol tables for both IPv4 and IPv6 address families.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>TEST_A9</name>
    <config>
      <name>TEST_A9</name>
      <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
      <route-distinguisher>65000:100</route-distinguisher>
    </config>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</identifier>
        <name>DIRECTLY_CONNECTED</name>
        <config>
          <identifier
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
          <name>DIRECTLY_CONNECTED</name>
          <enabled>true</enabled>
        </config>
      </protocol>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
        <name>65000</name>
        <bgp>
          <global>
            <config>
              <as>65000</as>
            </config>
            <use-multiple-paths>

```



```

    <config>
      <enabled>true</enabled>
    </config>
  </ebgp>
  <config>
    <maximum-paths>2</maximum-paths>
  </config>
</ebgp>
</use-multiple-paths>
</global>
<neighbors>
  <neighbor>
    <neighbor-address>172.17.30.2</neighbor-address>
    <afi-safis>
      <afi-safi>
        <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
          <config>
            <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
              <enabled>>false</enabled>
            </config>
          </afi-safi>
        </afi-safis>
      <config>
        <enabled>>false</enabled>
        <neighbor-address>172.17.30.2</neighbor-address>
        <peer-as>18747</peer-as>
        <description>PPAL_SESSION</description>
        <peer-group>PPAL_BGP_L3</peer-group>
      </config>
    </neighbor>
    <neighbor>
      <neighbor-address>172.17.40.2</neighbor-address>
      <afi-safis>
        <afi-safi>
          <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
            <config>
              <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                <enabled>>false</enabled>
              </config>
            </afi-safi>
          </afi-safis>
        <config>
          <enabled>>false</enabled>
          <neighbor-address>172.17.40.2</neighbor-address>
          <peer-as>18010</peer-as>
          <description>BCK_SESSION</description>
          <peer-group>BCK_BGP_L3</peer-group>
        </config>
      </neighbor>

```

```

    </neighbors>
    <peer-groups>
      <peer-group>
        <peer-group-name>BCK_BGP_L3</peer-group-name>
        <afi-safis>
          <afi-safi>
            <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
            <config>
              <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
              <enabled>true</enabled>
            </config>
          </afi-safi>
        </afi-safis>
      </config>
      <peer-group-name>BCK_BGP_L3</peer-group-name>
      <peer-as>18010</peer-as>
    </config>
  </peer-group>
  <peer-group>
    <peer-group-name>PPAL_BGP_L3</peer-group-name>
    <afi-safis>
      <afi-safi>
        <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
        <config>
          <afi-safi-name
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
          <enabled>true</enabled>
        </config>
      </afi-safi>
    </afi-safis>
  </config>
  <peer-group-name>PPAL_BGP_L3</peer-group-name>
  <peer-as>18746</peer-as>
</config>
</peer-group>
</peer-groups>
</bgp>
<config>
  <identifier
types">oc-pol-types:BGP</identifier>
    <name>65000</name>
    <enabled>true</enabled>
  </config>
</protocol>
</protocols>
<tables>
  <table>
    <protocol
types">oc-pol-types:DIRECTLY_CONNECTED</protocol>

```

```

    <address-family
      xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
    <config>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        </config>
      </table>
    </table>
    <protocol
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
      <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
      <config>
        <protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
          <address-family
            xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
          </config>
        </table>
      </table>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>
        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        <config>
          <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
            <address-family
              xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
            </config>
          </table>
        </table>
        <protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>
          <address-family
            xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
          <config>
            <protocol
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
              <address-family
                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
              </config>
            </table>
          </table>
        </config>
      </table>
    </table>
  </table>

```

```

    </table>
  </tables>
</network-instance>
</network-instances>

```

Restrictions

- On the first time `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/peer-groups` and `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/neighbors` paths are configured, those configuration needs the respective **AFI-SAFI** configuration that be present to indicate **AFI** type:

```

/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/neighbors/
neighbor/afi-safis

```

```

/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/peer-groups/
peer-group/afi-safis

```

The above information is necessary on OcNOS model to generate the follow paths:

```

/ipi-bgp:bgp/bgp-instances/bgp-instance/address-families

```

```

/ipi-bgp:bgp/bgp-instances/bgp-instance/peer-groups/peer-group/address-families

```

```

/ipi-bgp:bgp/bgp-instances/bgp-instance/address-family-vrfs

```

- After the `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/peer-groups` and `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/neighbors` paths are configured on equipment, on the further configurations on those paths the user do not need to indicate the AFI-SAFE, the translation will look for this information on equipment database.

Delete BGP Instance

In this XML configuration snippet, BGP instances are configured on network-instance on OpenConfig and on container BGP on OcNOS side. Due this difference the delete process need to handle if the operation is trying to delete one VRF instance or the entire BGP instance.

When using OpenConfig, the BGP object on OcNOS database is only deleted by the delete on "default" network-instance. When the delete is execute on VRF network-instance it only deletes the given VRF instance.

If there are VRF instances configured and a delete operation is executed on "default" network-instance, it going to clean only entries configured on "default" network-instance. To remove VRF instances, the user needs to apply a operation delete on VRF instances.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is a sample NetConf Payload to delete BGP instance.

Delete VRF instance:

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>VRF1</name>
  </network-instance>
</network-instances>

```

```

    <protocols>
      <protocol operation="delete">
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
        <name>100</name>
      </protocol>
    </protocols>
  </network-instance>
</network-instances>

```

Delete default instance:

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol operation="delete">
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
        <name>100</name>
      </protocol>
    </protocols>
  </network-instance>
</network-instances>

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to delete BGP instance.

Delete VRF instance:

```

<bgp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp">
  <bgp-instances>
    <bgp-instance>
      <bgp-as>100</bgp-as>
      <address-family-vrfs>
        <address-family-vrf operation="delete">
          <afi>ipv4</afi>
          <safi>unicast</safi>
          <vrf-name>VRF1</vrf-name>
        </address-family-vrf>
      </address-family-vrfs>
    </bgp-instance>
  </bgp-instances>
</bgp>

```

Delete default instance:

```

<bgp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp">
  <bgp-instances>
    <bgp-instance operation="delete">
      <bgp-as>100</bgp-as>
    </bgp-instance>
  </bgp-instances>
</bgp>

```

Restrictions

On OpenConfig BGP datamodel the container global do not have any key to identify a single BGP instance, but the BGP AS information is placed under xpath `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global/config/as`.

On IPI BGP datamodel, the BGP AS information is a key for BGP container, and it does not allow the delete on xpath `/ipi-bgp:/bgp/bgp-instances/bgp-instance/config/bgp-as` to avoid delete its own instance key.

In this case, when translation framework detects a delete or remove operation on following OpenConfig xpaths:

1. `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global`
2. `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global/config`
3. `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global/config/as`

It will trigger an error message to NETCONF client and do not execute the delete operation.

To avoid this issue, when user needs to delete or remove a configuration under OpenConfig xpath `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/global/config`, user must adds a "delete" or "remove" operation directly on the leaf or leaves desired to be removed, rather than delete the entire container.

BGP RIB Counters IPv4

The BGP RIB (Routing information base) is a set of counters to retrieve information about routes from neighbors. This section gives details on BGP RIB IPv4.

The containers related to RIB are only the status on both Open Config and OcNOS datamodels, and there are no configuration related to this.

On OcNOS, the containers are available only after the BGP negotiate routers, the tables are empty before and cannot be retrieved.

The table below displays each table information:.

OcNOS CLI	OcNOS XPath	Open Config XPath
show ip bgp neighbors <IP-address> routes	/ipi-bgp:bgp/bgp-instances/bgp-instance/rib/address-family/routes/route/next-hop	/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipv4-unicast/loc-rib/routes/route
show ip bgp neighbors <IP-address> received-routes	For default VRF instances: /ipi-bgp:bgp/bgp-instances/bgp-instance/rib/address-family/routes/route/next-hop For non-default VRF instances: /ipi-bgp:bgp/bgp-instances/bgp-instance/peers/peer/address-families/address-family/peer-adj-in-route/next-hop	/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipv4-unicast/neighbors/neighbor/adj-rib-in-post/routes/route

OcNOS CLI	OcNOS XPath	Open Config XPath
show ip bgp neighbors <IP-address> advertised-routes	For default VRF instances: /ipi-bgp:bgp/bgp-instances/bgp-instance/address-family-vrfs/address-family-vrf/vrf-peers/peer-adj-out-route/next-hop For non-default VRF instances: /ipi-bgp:bgp/bgp-instances/bgp-instance/peers/peer/address-families/address-family/peer-adj-out-route/next-hop	/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipv4-unicast/neighbors/neighbor/adj-rib-out-post/routes/route
To get “last update” information: show ip bgp <IP-address>	/ipi-bgp:bgp/bgp-instances/bgp-instance/rib/address-family/routes/route/next-hop	/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipv4-unicast/loc-rib/routes/route
show ip bgp ipv4 unicast <IP-address>	/ipi-bgp:bgp/bgp-instances/bgp-instance/rib/address-family/routes/route/next-hop	/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipv4-unicast/loc-rib/routes/route
When have user-defined VRF: show ip bgp vrf <VRF name>	/ipi-bgp:bgp/bgp-instances/bgp-instance/rib/address-family/routes/route/next-hop	/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipv4-unicast/loc-rib/routes/route
When have user-defined VRF: show ip bgp vpnv4 vrf <VRF name>	/ipi-bgp:bgp/bgp-instances/bgp-instance/rib/address-family/routes/route/next-hop	/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipv4-unicast/loc-rib/routes/route
When have user-defined VRF: show ip bgp vpnv4 vrf <VRF name> <IP-address>	/ipi-bgp:bgp/bgp-instances/bgp-instance/rib/address-family/routes/route/next-hop	/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipv4-unicast/loc-rib/routes/route

Release

This configuration was introduced in OcNOS version 6.2.

OpenConfig NetConf Payload

N/A

OcNOS CLI Command

The below CLI command is an example to illustrate the indicated counters.

To have a complete BGP RIB scenario, it needs more than one equipment configured to work with BGP.

```
router bgp 200
 neighbor 10.10.10.11 remote-as 300
 !
 address-family ipv4 unicast
 redistribute connected
 redistribute static
 neighbor 10.10.10.11 activate
```

```
neighbor 10.10.10.11 soft-reconfiguration inbound
exit-address-family
!
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to illustrate the BGP RIB Counters IPv4.

```
<bgp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp">
  <bgp-instances>
    <bgp-instance>
      <bgp-as>200</bgp-as>
      <config>
        <bgp-as>200</bgp-as>
      </config>
      <state>
        <bgp-as>200</bgp-as>
        <version>4</version>
        <table-version>1</table-version>
        <total-prefixes>2</total-prefixes>
        <router-run-time-ip-address>192.168.122.61</router-run-time-
ip-address>
        <scan-remain-time>16</scan-remain-time>
      </state>
      <rib>
        <address-family>
          <safi>unicast</safi>
          <afi>ipv4</afi>
          <state>
            <safi>unicast</safi>
            <afi>ipv4</afi>
          </state>
          <routes>
            <route>
              <route-distinguisher>0</route-distinguisher>
              <network-address>10.10.10.0/24</network-address>
              <next-hop>
                <next-hop-address>0.0.0.0</next-hop-address>
                <state>
                  <next-hop-address>0.0.0.0</next-hop-
address>
                  <peer-network-weight>32768</peer-network-
weight>
                  <bgp-as-path-string>Local</bgp-as-path-
string>
                  <bgp-as-path-4-byte-origin>incomplete</
bgp-as-path-4-byte-origin>
                  <ibgp-metric-route>0</ibgp-metric-route>
                  <route-local-preference>100</route-local-
preference>
                  <last-update-route>2022-12-04T17:50:28Z</
last-update-route>
                  <reflector-client-route>false</reflector-
client-route>
                  <route-dampening-active>false</route-
dampening-active>
                  <history-route>false</history-route>
```



```

route>                                <nexthop-valid-route>true</nexthop-valid-
route>                                <med-flag-type-route>>false</med-flag-type-
                                        <valid-route>true</valid-route>
                                        <stale-route>>false</stale-route>
                                        <route-type>sourced</route-type>
                                        <ecmp-multi-candidate-route>>false</ecmp-
multi-candidate-route>
                                        <multi-installed-route>>false</multi-
installed-route>
                                        <atomic-aggregate-route>>false</atomic-
aggregate-route>
                                        <selected-route>true</selected-route>
                                        <bgp-tx-path-id>-1</bgp-tx-path-id>
                                        <bgp-rx-path-id>-1</bgp-rx-path-id>
                                        </state>
</next-hop>
<next-hop>
  <next-hop-address>10.10.10.11</next-hop-
address>
  <state>
    <next-hop-address>10.10.10.11</next-hop-
address>
    <peer-network-weight>32768</peer-network-
weight>
    <bgp-as-path-string>Local</bgp-as-path-
string>
    <bgp-as-path-4-byte-origin>incomplete</
bgp-as-path-4-byte-origin>
    <ibgp-metric-route>0</ibgp-metric-route>
    <route-local-preference>100</route-local-
preference>
    <last-update-route>2022-12-04T17:50:28Z</
last-update-route>
    <reflector-client-route>>false</reflector-
client-route>
    <route-dampening-active>>false</route-
dampening-active>
    <history-route>>false</history-route>
    <nexthop-valid-route>true</nexthop-valid-
route>
    <med-flag-type-route>>false</med-flag-type-
route>
    <valid-route>true</valid-route>
    <stale-route>>false</stale-route>
    <route-type>sourced</route-type>
    <ecmp-multi-candidate-route>>false</ecmp-
multi-candidate-route>
    <multi-installed-route>>false</multi-
installed-route>
    <atomic-aggregate-route>>false</atomic-
aggregate-route>
    <selected-route>true</selected-route>
    <bgp-tx-path-id>-1</bgp-tx-path-id>
    <bgp-rx-path-id>-1</bgp-rx-path-id>
    </state>
  </next-hop>
<state>
  <route-distinguisher>0</route-distinguisher>

```

```

address>                                <network-address>10.10.10.0/24</network-
                                        </state>
                                        </route>
                                        <route>
                                          <route-distinguisher>0</route-distinguisher>
                                          <network-address>192.168.122.0</network-address>
                                          <next-hop>
                                            <next-hop-address>0.0.0.0</next-hop-address>
                                            <state>
                                              <next-hop-address>0.0.0.0</next-hop-
address>                                <peer-network-weight>32768</peer-network-
weight>                                <bgp-as-path-string>Local</bgp-as-path-
string>                                <bgp-as-path-4-byte-origin>incomplete</
bgp-as-path-4-byte-origin>            <ibgp-metric-route>0</ibgp-metric-route>
                                        <route-local-preference>100</route-local-
preference>                            <last-update-route>2022-12-04T17:50:28Z</
last-update-route>                    <reflector-client-route>false</reflector-
client-route>                          <route-dampening-active>false</route-
dampening-active>                    <history-route>false</history-route>
                                        <nexthop-valid-route>true</nexthop-valid-
route>                                <med-flag-type-route>false</med-flag-type-
route>                                <valid-route>true</valid-route>
                                        <stale-route>false</stale-route>
                                        <route-type>sourced</route-type>
                                        <ecmp-multi-candidate-route>false</ecmp-
multi-candidate-route>                <multi-installed-route>false</multi-
installed-route>                      <atomic-aggregate-route>false</atomic-
aggregate-route>                      <selected-route>true</selected-route>
                                        <bgp-tx-path-id>-1</bgp-tx-path-id>
                                        <bgp-rx-path-id>-1</bgp-rx-path-id>
                                        </state>
                                        </next-hop>
                                        <next-hop>
                                          <next-hop-address>10.10.10.11</next-hop-
address>                                <state>
address>                                <next-hop-address>10.10.10.11</next-hop-
weight>                                <peer-network-weight>32768</peer-network-
string>                                <bgp-as-path-string>Local</bgp-as-path-
bgp-as-path-4-byte-origin>            <bgp-as-path-4-byte-origin>incomplete</
                                        <ibgp-metric-route>0</ibgp-metric-route>

```

```

        preference>                                <route-local-preference>100</route-local-
last-update-route>                                <last-update-route>2022-12-04T17:50:28Z</
client-route>                                       <reflector-client-route>false</reflector-
dampening-active>                                  <route-dampening-active>false</route-
                                                    <history-route>false</history-route>
route>                                              <nexthop-valid-route>true</nexthop-valid-
route>                                              <med-flag-type-route>false</med-flag-type-
                                                    <valid-route>true</valid-route>
                                                    <stale-route>false</stale-route>
                                                    <route-type>sourced</route-type>
                                                    <ecmp-multi-candidate-route>false</ecmp-
multi-candidate-route>                             <multi-installed-route>false</multi-
installed-route>                                    <atomic-aggregate-route>false</atomic-
aggregate-route>                                    <selected-route>true</selected-route>
                                                    <bgp-tx-path-id>-1</bgp-tx-path-id>
                                                    <bgp-rx-path-id>-1</bgp-rx-path-id>
                                                    </state>
                                                    </next-hop>
                                                    <state>
                                                    <route-distinguisher>0</route-distinguisher>
                                                    <network-address>192.168.122.0</network-
address>
                                                    </state>
                                                    </route>
                                                    </routes>
</address-family>
<address-family>
  <safi>link-state</safi>
  <afi>link-state</afi>
  <state>
    <safi>link-state</safi>
    <afi>link-state</afi>
  </state>
</address-family>
</rib>
<address-families>
  <address-family>
    <afi>ipv4</afi>
    <safi>unicast</safi>
    <config>
      <afi>ipv4</afi>
      <safi>unicast</safi>
    </config>
    <state>
      <afi>ipv4</afi>
      <safi>unicast</safi>
    </state>
    <route-redistribute-lists>
      <route-redistribute-list>

```

```

        <protocol-type>connected</protocol-type>
        <config>
            <protocol-type>connected</protocol-type>
        </config>
        <state>
            <protocol-type>connected</protocol-type>
        </state>
    </route-redirect-list>
</route-redirect-list>
<route-redirect-list>
    <protocol-type>static</protocol-type>
    <config>
        <protocol-type>static</protocol-type>
    </config>
    <state>
        <protocol-type>static</protocol-type>
    </state>
</route-redirect-list>
</route-redirect-lists>
</address-family>
</address-families>
<peers>
    <peer>
        <peer-address>10.10.10.11</peer-address>
        <address-families>
            <address-family>
                <afi>ipv4</afi>
                <safi>unicast</safi>
                <peer-adj-out-route>
                    <network-address>10.10.10.0/24</network-
address>
                    <next-hop>
                        <next-hop-address>10.10.10.10</next-hop-
address>
                        <state>
                            <next-hop-address>10.10.10.10</next-
hop-address>
                            <peer-network-weight>32768</peer-
network-weight>
                            <bgp-as-path-string>Local</bgp-as-
path-string>
                            <bgp-as-path-4-byte-
origin>incomplete</bgp-as-path-4-byte-origin>
                            <ibgp-metric-route>0</ibgp-metric-
route>
                            <route-local-preference>100</route-
local-preference>
                            <last-update-route>2022-12-
04T17:50:28Z</last-update-route>
                            <reflector-client-route>false</
reflector-client-route>
                            <route-dampening-active>false</route-
dampening-active>
                            <history-route>false</history-route>
                            <med-flag-type-route>false</med-flag-
type-route>
                            <valid-route>true</valid-route>
                            <stale-route>false</stale-route>
                            <route-type>sourced</route-type>

```

```

ecmp-multi-candidate-route>                <ecmp-multi-candidate-route>false</
installed-route>                            <multi-installed-route>false</multi-
aggregate-route>                            <atomic-aggregate-route>false</atomic-
                                              <selected-route>true</selected-route>
                                              <bgp-tx-path-id>-1</bgp-tx-path-id>
                                              <bgp-rx-path-id>-1</bgp-rx-path-id>
                                              </state>
</next-hop>
<state>
  <network-address>10.10.10.0/24</network-
address>
    </state>
</peer-adj-out-route>
<peer-adj-out-route>
  <network-address>192.168.122.0</network-
address>
    <next-hop>
      <next-hop-address>10.10.10.10</next-hop-
address>
        <state>
          <next-hop-address>10.10.10.10</next-
hop-address>
            <peer-network-weight>32768</peer-
network-weight>
            <bgp-as-path-string>Local</bgp-as-
path-string>
            <bgp-as-path-4-byte-
origin>incomplete</bgp-as-path-4-byte-origin>
            <ibgp-metric-route>0</ibgp-metric-
route>
            <route-local-preference>100</route-
local-preference>
            <last-update-route>2022-12-
04T17:50:28Z</last-update-route>
            <reflector-client-route>false</
reflector-client-route>
            <route-dampening-active>false</route-
dampening-active>
            <history-route>false</history-route>
            <med-flag-type-route>false</med-flag-
type-route>
            <valid-route>true</valid-route>
            <stale-route>false</stale-route>
            <route-type>sourced</route-type>
            <ecmp-multi-candidate-route>false</
ecmp-multi-candidate-route>
            <multi-installed-route>false</multi-
installed-route>
            <atomic-aggregate-route>false</atomic-
aggregate-route>
            <selected-route>true</selected-route>
            <bgp-tx-path-id>-1</bgp-tx-path-id>
            <bgp-rx-path-id>-1</bgp-rx-path-id>
          </state>
        </next-hop>
      <state>

```

```

address>                                <network-address>192.168.122.0</network-
                                        </state>
                                        </peer-adj-out-route>
                                        <peer-adj-in-route>
address>                                <network-address>10.10.10.0/24</network-
                                        <next-hop>
address>                                <next-hop-address>10.10.10.11</next-hop-
                                        <state>
hop-address>                            <next-hop-address>10.10.10.11</next-
weight>                                <peer-network-weight>0</peer-network-
string>                                <bgp-as-path-string>300</bgp-as-path-
origin>incomplete</bgp-as-path-4-byte-
route>                                <ibgp-metric-route>0</ibgp-metric-
route>192.168.122.60</network-remote-address-route>
route-peer-address>                    <route-peer-address>10.10.10.11</
local-preference>                      <route-local-preference>100</route-
01T00:00:00Z</last-update-route>      <last-update-route>1970-01-
reflector-client-route>                <reflector-client-route>false</
dampening-active>                      <route-dampening-active>false</route-
                                        <history-route>false</history-route>
valid-route>                           <nexthop-valid-route>false</nexthop-
type-route>                             <med-flag-type-route>false</med-flag-
                                        <valid-route>true</valid-route>
                                        <stale-route>false</stale-route>
                                        <route-type>external</route-type>
                                        <ecmp-multi-candidate-route>false</
ecmp-multi-candidate-route>            <multi-installed-route>false</multi-
installed-route>                        <atomic-aggregate-route>false</atomic-
aggregate-route>                        <selected-route>true</selected-route>
                                        <bgp-tx-path-id>0</bgp-tx-path-id>
                                        <bgp-rx-path-id>0</bgp-rx-path-id>
                                        </state>
                                        </next-hop>
                                        <state>
address>                                <network-address>10.10.10.0/24</network-
                                        </state>
                                        </peer-adj-in-route>
                                        <peer-adj-in-route>
address>                                <network-address>192.168.122.0</network-

```

```

address>
hop-address>
weight>
string>
origin>incomplete</bgp-as-path-4-byte-origin>
route>
route>192.168.122.60</network-remote-address-route>
route-peer-address>
local-preference>
01T00:00:00Z</last-update-route>
reflector-client-route>
dampening-active>
valid-route>
type-route>
ecmp-multi-candidate-route>
installed-route>
aggregate-route>
address>
<next-hop>
  <next-hop-address>10.10.10.11</next-hop-
  <state>
    <next-hop-address>10.10.10.11</next-
    <peer-network-weight>0</peer-network-
    <bgp-as-path-string>300</bgp-as-path-
    <bgp-as-path-4-byte-
    <ibgp-metric-route>0</ibgp-metric-
    <network-remote-address-
    <route-peer-address>10.10.10.11</
    <route-local-preference>100</route-
    <last-update-route>1970-01-
    <reflector-client-route>false</
    <route-dampening-active>false</route-
    <history-route>false</history-route>
    <nexthop-valid-route>false</nexthop-
    <med-flag-type-route>false</med-flag-
    <valid-route>true</valid-route>
    <stale-route>false</stale-route>
    <route-type>external</route-type>
    <ecmp-multi-candidate-route>false</
    <multi-installed-route>false</multi-
    <atomic-aggregate-route>false</atomic-
    <selected-route>true</selected-route>
    <bgp-tx-path-id>0</bgp-tx-path-id>
    <bgp-rx-path-id>0</bgp-rx-path-id>
  </state>
</next-hop>
<state>
  <network-address>192.168.122.0</network-
  </state>
</peer-adj-in-route>
<config>
  <afi>ipv4</afi>
  <safi>unicast</safi>
  <activate />
  <soft-reconfig-inbound />
</config>
<state>
  <afi>ipv4</afi>
  <safi>unicast</safi>
  <activate />

```

	<soft-reconfig-inbound />
	<community-count>0</community-count>
address-family-capability>	<address-family-capability>advertise-receive</
global>	<ipv6-next-hop-global>::</ipv6-next-hop-
	<ipv6-next-hop-local>::</ipv6-next-hop-local>
	<remote-port>179</remote-port>
	<remote-address>10.10.10.11</remote-address>
	<local-host>10.10.10.10</local-host>
	<ipv4-next-hop>10.10.10.10</ipv4-next-hop>
	<local-port>40394</local-port>
address-family-table-version>	<peer-address-family-table-version>1</peer-
family-table-version>	<address-family-table-version>1</address-
	<prefix-count>2</prefix-count>
	<send-prefix-count>2</send-prefix-count>
	<count>1</count>
	<connection-type>non_shared</connection-type>
established-count>	<connection-established-count>1</connection-
time>	<graceful-restart-time>0</graceful-restart-
established-up-time>	<bgp-established-up-time>00:02:24</bgp-
	<last-read-time>00:00:23</last-read-time>
	<bgp-peer-state>established</bgp-peer-state>
	<link-type>external</link-type>
	<router-id>192.168.122.60</router-id>
	<advertisement-interval>30</advertisement-
interval>	<calculated-hold-time>90</calculated-hold-
time>	<calculated-keepalive>30</calculated-
keepalive>	<route-refresh-capability>advertised-and-
received-old-and-new</route-refresh-capability>	<counters>
	<keepalive-in-messages>6</keepalive-in-
messages>	<keepalive-out-messages>6</keepalive-out-
messages>	<open-messages-in>1</open-messages-in>
	<open-messages-out>1</open-messages-out>
	<as-path-count>2</as-path-count>
	<update-message-in>1</update-message-in>
	<update-message-out>1</update-message-out>
	<received-packet-count>8</received-packet-
count>	<notification-in>0</notification-in>
	<notification-out>0</notification-out>
	<packet-in-queue>0</packet-in-queue>
	<packet-out-queue>0</packet-out-queue>
	<sent-packet-count>8</sent-packet-count>
	<refresh-received-packet-count>0</refresh-
received-packet-count>	<refresh-sent-packet-count>0</refresh-
sent-packet-count>	</counters>


```

        </state>
        <peer-index>
            <state>
                <peer-index>1</peer-index>
                <offset>0</offset>
                <mask>0x2</mask>
            </state>
        </peer-index>
    </address-family>
</address-families>
<config>
    <peer-address>10.10.10.11</peer-address>
    <peer-as>300</peer-as>
</config>
<state>
    <peer-address>10.10.10.11</peer-address>
    <peer-as>300</peer-as>
</state>
</peer>
</peers>
</bgp-instance>
</bgp-instances>
</bgp>

```

Validation with NetConf get

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <config>
      <name>default</name>
      <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
      </config>
      <state>
        <name>default</name>
        <type
          xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
        </state>
        <protocols>
          <protocol>
            <identifier
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <config>
              <identifier
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
              <name>DIRECTLY_CONNECTED</name>
              <enabled>true</enabled>
            </config>
            <state>
              <identifier

```

```

        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
        <name>DIRECTLY_CONNECTED</name>
        <enabled>true</enabled>
    </state>
</protocol>
<protocol>
    <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
        <name>200</name>
        <bgp>
            <global>
                <afi-safis>
                    <afi-safi>
                        <afi-safi-name
                            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                            <config>
                                <afi-safi-name
                                    xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                                    <enabled>true</enabled>
                                </config>
                                <state>
                                    <afi-safi-name
                                        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                                        <enabled>true</enabled>
                                    </state>
                                </afi-safi>
                            </afi-safis>
                        <config>
                            <as>200</as>
                        </config>
                        <state>
                            <as>200</as>
                            <total-prefixes>2</total-prefixes>
                        </state>
                    </global>
                <rib>
                    <afi-safis>
                        <afi-safi>
                            <afi-safi-name
                                xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
                                <ipv4-unicast>
                                    <loc-rib>
                                        <routes>
                                            <route>
                                                <prefix>10.10.10.0/24</prefix>
                                                <origin>0.0.0.0</origin>
                                                <path-id>0</path-id>
                                                <state>
                                                    <prefix>10.10.10.0/24</prefix>
                                                    <origin>0.0.0.0</origin>
                                                    <path-id>0</path-id>
                                                    <last-modified>1670176228</last-modified>

```

```
        <valid-route>true</valid-route>
      </state>
    </route>
  </routes>
</loc-rib>
<neighbors>
  <neighbor>
    <neighbor-address>10.10.10.11</neighbor-address>
    <state>
      <neighbor-address>10.10.10.11</neighbor-address>
    </state>
    <adj-rib-out-post>
      <routes>
        <route>
          <prefix>10.10.10.0/24</prefix>
          <path-id>0</path-id>
          <state>
            <prefix>10.10.10.0/24</prefix>
            <path-id>0</path-id>
            <last-modified>1670176228</last-modified>
            <valid-route>true</valid-route>
          </state>
        </route>
        <route>
          <prefix>192.168.122.0</prefix>
          <path-id>0</path-id>
          <state>
            <prefix>192.168.122.0</prefix>
            <path-id>0</path-id>
            <last-modified>1670176228</last-modified>
            <valid-route>true</valid-route>
          </state>
        </route>
      </routes>
    </adj-rib-out-post>
    <adj-rib-in-post>
      <routes>
        <route>
          <prefix>10.10.10.0/24</prefix>
          <path-id>0</path-id>
          <state>
            <prefix>10.10.10.0/24</prefix>
            <path-id>0</path-id>
            <last-modified>0</last-modified>
            <valid-route>true</valid-route>
          </state>
        </route>
      </routes>
    </adj-rib-in-post>
  </neighbor>
</neighbors>
```

```

        </state>
      </route>
    </routes>
  </adj-rib-in-post>
</neighbor>
</neighbors>
</ipv4-unicast>
<state>
  <afi-safi-name
    xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
  </state>
</afi-safi>
</afi-safis>
</rib>
<neighbors>
  <neighbor>
    <neighbor-address>10.10.10.11</neighbor-address>
    <afi-safis>
      <afi-safi>
        <afi-safi-name
          xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
        <config>
          <afi-safi-name
            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
            <enabled>true</enabled>
          </config>
        <state>
          <afi-safi-name
            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV4_UNICAST</afi-safi-name>
            <enabled>true</enabled>
          </state>
        </afi-safi>
      </afi-safis>
    <config>
      <enabled>true</enabled>
      <neighbor-address>10.10.10.11</neighbor-address>
      <peer-as>300</peer-as>
    </config>
    <state>
      <enabled>true</enabled>
      <neighbor-address>10.10.10.11</neighbor-address>
      <peer-as>300</peer-as>
    </state>
  </neighbor>
</neighbors>

```

```

        </neighbor>
    </neighbors>
</bgp>
<config>
    <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
        <name>200</name>
        <enabled>true</enabled>
    </config>
    <state>
        <enabled>true</enabled>
        <identifier
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
            <name>200</name>
        </state>
    </protocol>
</protocols>
<tables>
    <table>
        <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
            <address-family
                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
            <config>
                <protocol
                    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                    <address-family
                        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                    </config>
                    <state>
                        <protocol
                            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                            <address-family
                                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                            </state>
                        </table>
                    </table>
                <protocol
                    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
                    <address-family
                        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
                    <config>
                        <protocol
                            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                            <address-family
                                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
                            </config>

```

```

    <state>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        </state>
      </table>
    </table>
    <table>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>
        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        <config>
          <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
            <address-family
              xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
            </config>
          <state>
            <protocol
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
              <address-family
                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
              </state>
            </table>
          </tables>
          <table-connections>
            <table-connection>
              <src-protocol
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</src-protocol>
              <dst-protocol
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</dst-protocol>
              <address-family
                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
              <config>
                <dst-protocol
                  xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</dst-protocol>
                  <address-family
                    xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                  <dst-instance xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-ni-
augments">200</dst-instance>
                  <default-import-policy>ACCEPT_ROUTE</default-import-policy>
                  <src-protocol
                    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</src-protocol>
                  </config>
                </dst-protocol>
              </config>
            </table-connection>
          </table-connections>
        </config>
      </table>
    </table>
  </state>
</table>

```

```

    </table-connection>
    <table-connection>
      <src-protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:STATIC</src-protocol>
      <dst-protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</dst-protocol>
      <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
      <config>
        <dst-protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</dst-protocol>
        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        <dst-instance xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-ni-
augments">200</dst-instance>
        <default-import-policy>ACCEPT_ROUTE</default-import-policy>
        <src-protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:STATIC</src-protocol>
        </config>
      </table-connection>
    </table-connections>
  </network-instance>
</network-instances>
```

Restrictions

The containers related to RIB are status only on both Open Config and OcNOS datamodels, and there are no configuration related to this.

On OcNOS the containers are available only after the BGP negotiate routers, before it this tables are empty and could not be retrieved.

The paths /oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safi/afi-safi/ipv4-unicast/loc-rib/routes/route and /oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safi/afi-safi/ipv6-unicast/loc-rib/routes/route have some keys with fixed values, the table below show the values. Note the "X" indicate that is valid for IPv4 and IPv6 containers.

OpenConfig XPath	OcNOS XPath
/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipvX-unicast/loc-rib/routes/route/origin	Use fixed value: <ul style="list-style-type: none">• IPV4: "0.0.0.0"• IPV6: "0::0"

/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipvX-unicast/loc-rib/routes/route/path-id	Fixed value "0"
/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipvX-unicast/loc-rib/routes/route/prefix	/ipi-bgp:bgp/bgp-instances/bgp-instance/rib/address-family/routes/route/network-address

BGP RIB Counters IPv6

The BGP RIB (Routing information base) is a set of counters to retrieve information about routes from neighbors. This section gives details on BGP RIB IPv6.

The containers related to RIB are only the status on both Open Config and OcNOS datamodels, and there are no configuration related to this.

On OcNOS, the containers are available only after the BGP negotiate routers, the tables are empty before and cannot be retrieved.

The table below displays each table information:.

OcNOS CLI	OcNOS XPath	OpenConfig XPath
show bgp ipv6 neighbors <IP-address IPv6> routes	/ipi-bgp:bgp/bgp-instances/bgp-instance/rib/address-family/routes/route/next-hop	/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipv6-unicast/loc-rib/routes/route
show bgp ipv6 neighbors <IP-address IPv6> received-routes	For default VRF instances: /ipi-bgp:bgp/bgp-instances/bgp-instance/address-family-vrfs/address-family-vrf/vrf-peers/vrf-peer/peer-adj-in-route/next-hop For non-default VRF instances: /ipi-bgp:bgp/bgp-instances/bgp-instance/peers/peer/address-families/address-family/peer-adj-in-route/next-hop	/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipv6-unicast/neighbors/neighbor/adj-rib-in-post/routes/route
show bgp ipv6 neighbors <IP-address IPv6> advertised-routes	For default VRF instances: /ipi-bgp:bgp/bgp-instances/bgp-instance/address-family-vrfs/address-family-vrf/vrf-peers/vrf-peer/peer-adj-out-route/next-hop For non-default VRF instances: /ipi-bgp:bgp/bgp-instances/bgp-instance/peers/peer/address-families/address-family/peer-adj-out-route/next-hop	/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipv6-unicast/neighbors/neighbor/adj-rib-out-post/routes/route
To get "last update" information: show bgp ipv6 <IP-address IPv6>	/ipi-bgp:bgp/bgp-instances/bgp-instance/rib/address-family/routes/route/next-hop	/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipv6-unicast/loc-rib/routes/route

show bgp ipv6 unicast <IP-address IPv6>	/ipi-bgp:bgp/bgp-instances/bgp-instance/rib/address-family/routes/route/next-hop	/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipv6-unicast/loc-rib/routes/route
When have user-defined VRF, to get “last update” information: show ip bgp vpnv6 vrf <VRF name>	/ipi-bgp:bgp/bgp-instances/bgp-instance/rib/address-family/routes/route/next-hop	/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipv6-unicast/loc-rib/routes/route
When have user-defined VRF, to get “last update” information: show ip bgp vpnv6 vrf <VRF name> <IP-address IPv6>	/ipi-bgp:bgp/bgp-instances/bgp-instance/rib/address-family/routes/route/next-hop	/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipv6-unicast/loc-rib/routes/route
show bgp ipv6 summary	/ipi-bgp:bgp/bgp-instances/bgp-instance/rib/address-family/routes/route/next-hop	/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipv6-unicast/loc-rib/routes/route

Release

This configuration was introduced in OcNOS version 6.2.

OpenConfig NetConf Payload

N/A

OcNOS CLI Command

The below CLI command is an example to illustrate the indicated counters.

To have a complete BGP RIB scenario, it needs more than one equipment configured to work with BGP.

```
interface eth1
  ipv6 address f0ca::11/48
  !
router bgp 200
  neighbor f0ca::10 remote-as 300
  !
  address-family ipv6 unicast
  redistribute connected
  redistribute static
  neighbor f0ca::10 activate
  neighbor f0ca::10 soft-reconfiguration inbound
  exit-address-family
  !
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to illustrate the BGP RIB Counters IPv6.

```
<bgp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp">
  <bgp-instances>
    <bgp-instance>
```

```

    <bgp-as>200</bgp-as>
    <config>
      <bgp-as>200</bgp-as>
    </config>
    <state>
      <bgp-as>200</bgp-as>
      <version>4</version>
      <table-version>1</table-version>
      <total-prefixes>0</total-prefixes>
      <router-run-time-ip-address>192.168.122.60</router-run-time-
ip-address>
      <scan-remain-time>38</scan-remain-time>
    </state>
    <rib>
      <address-family>
        <safi>unicast</safi>
        <afi>ipv6</afi>
        <state>
          <safi>unicast</safi>
          <afi>ipv6</afi>
        </state>
        <routes>
          <route>
            <route-distinguisher>0</route-distinguisher>
            <network-address>b0b0::/64</network-address>
            <next-hop>
              <next-hop-address>::</next-hop-address>
              <state>
                <next-hop-address>::</next-hop-address>
                <peer-network-weight>32768</peer-network-
weight>
                <bgp-as-path-string>Local</bgp-as-path-
string>
                <bgp-as-path-4-byte-origin>incomplete</
bgp-as-path-4-byte-origin>
                <ibgp-metric-route>0</ibgp-metric-route>
                <route-local-preference>100</route-local-
preference>
                <last-update-route>2022-11-20T22:42:24Z</
last-update-route>
                <reflector-client-route>false</reflector-
client-route>
                <route-dampening-active>false</route-
dampening-active>
                <history-route>false</history-route>
                <nexthop-valid-route>true</nexthop-valid-
route>
                <med-flag-type-route>false</med-flag-type-
route>
                <valid-route>true</valid-route>
                <stale-route>false</stale-route>
                <route-type>sourced</route-type>
                <ecmp-multi-candidate-route>false</ecmp-
multi-candidate-route>
                <multi-installed-route>false</multi-
installed-route>
                <atomic-aggregate-route>false</atomic-
aggregate-route>
                <selected-route>true</selected-route>

```

```

                                <bgp-tx-path-id>-1</bgp-tx-path-id>
                                <bgp-rx-path-id>-1</bgp-rx-path-id>
                            </state>
                        </next-hop>
                    <next-hop>
                        <next-hop-
address>f0ca::10(fe80::5054:ff:fe78:1f3)</next-hop-address>
                        <state>
                            <next-hop-
address>f0ca::10(fe80::5054:ff:fe78:1f3)</next-hop-address>
                            <peer-network-weight>32768</peer-network-
weight>
                            <bgp-as-path-string>Local</bgp-as-path-
string>
                            <bgp-as-path-4-byte-origin>incomplete</
bgp-as-path-4-byte-origin>
                            <ibgp-metric-route>0</ibgp-metric-route>
                            <route-local-preference>100</route-local-
preference>
                            <last-update-route>2022-11-20T22:42:24Z</
last-update-route>
                            <reflector-client-route>false</reflector-
client-route>
                            <route-dampening-active>false</route-
dampening-active>
                            <history-route>false</history-route>
                            <nexthop-valid-route>true</nexthop-valid-
route>
                            <med-flag-type-route>false</med-flag-type-
route>
                            <valid-route>true</valid-route>
                            <stale-route>false</stale-route>
                            <route-type>sourced</route-type>
                            <ecmp-multi-candidate-route>false</ecmp-
multi-candidate-route>
                            <multi-installed-route>false</multi-
installed-route>
                            <atomic-aggregate-route>false</atomic-
aggregate-route>
                            <selected-route>true</selected-route>
                            <bgp-tx-path-id>-1</bgp-tx-path-id>
                            <bgp-rx-path-id>-1</bgp-rx-path-id>
                        </state>
                    </next-hop>
                <state>
                    <route-distinguisher>0</route-distinguisher>
                    <network-address>b0b0::/64</network-address>
                </state>
            </route>
            <route>
                <route-distinguisher>0</route-distinguisher>
                <network-address>f0ca::/24</network-address>
                <next-hop>
                    <next-hop-
address>f0ca::10(fe80::5054:ff:fe78:1f3)</next-hop-address>
                    <state>
                        <next-hop-
address>f0ca::10(fe80::5054:ff:fe78:1f3)</next-hop-address>
                        <peer-network-weight>0</peer-network-
weight>

```

```

string>
bgp-as-path-4-byte-origin>
route>192.168.122.52</network-remote-address-route>
originator-id-route>
address>
preference>
last-update-route>
client-route>
dampening-active>
route>
route>
multi-candidate-route>
installed-route>
aggregate-route>
weight>
string>
bgp-as-path-4-byte-origin>
preference>
<bgp-med-value>0</bgp-med-value>
<bgp-as-path-string>300</bgp-as-path-
<bgp-as-path-4-byte-origin>incomplete</
<ibgp-metric-route>0</ibgp-metric-route>
<network-remote-address-
<originator-id-route>192.168.122.52</
<route-peer-address>f0ca::10</route-peer-
<route-local-preference>100</route-local-
<last-update-route>2022-11-20T22:43:26Z</
<reflector-client-route>false</reflector-
<route-dampening-active>false</route-
<history-route>false</history-route>
<nexthop-valid-route>true</nexthop-valid-
<med-flag-type-route>false</med-flag-type-
<valid-route>true</valid-route>
<stale-route>false</stale-route>
<route-type>external</route-type>
<ecmp-multi-candidate-route>false</ecmp-
<multi-installed-route>false</multi-
<atomic-aggregate-route>false</atomic-
<selected-route>true</selected-route>
<bgp-tx-path-id>-1</bgp-tx-path-id>
<bgp-rx-path-id>-1</bgp-rx-path-id>
</state>
</next-hop>
<state>
<route-distinguisher>0</route-distinguisher>
<network-address>f0ca::/24</network-address>
</state>
</route>
<route>
<route-distinguisher>0</route-distinguisher>
<network-address>f0ca::/48</network-address>
<next-hop>
<next-hop-address>::</next-hop-address>
<state>
<next-hop-address>::</next-hop-address>
<peer-network-weight>32768</peer-network-
<bgp-as-path-string>Local</bgp-as-path-
<bgp-as-path-4-byte-origin>incomplete</
<ibgp-metric-route>0</ibgp-metric-route>
<route-local-preference>100</route-local-

```

```

last-update-route>                <last-update-route>2022-11-20T22:42:24Z</
client-route>                      <reflector-client-route>false</reflector-
dampening-active>                  <route-dampening-active>false</route-
route>                             <history-route>false</history-route>
route>                             <nexthop-valid-route>true</nexthop-valid-
multi-candidate-route>             <med-flag-type-route>false</med-flag-type-
installed-route>                   <valid-route>true</valid-route>
aggregate-route>                   <stale-route>false</stale-route>
                                   <route-type>sourced</route-type>
                                   <ecmp-multi-candidate-route>false</ecmp-
                                   <multi-installed-route>false</multi-
                                   <atomic-aggregate-route>false</atomic-
                                   <selected-route>true</selected-route>
                                   <bgp-tx-path-id>-1</bgp-tx-path-id>
                                   <bgp-rx-path-id>-1</bgp-rx-path-id>
                                   </state>
                                   </next-hop>
                                   <state>
                                   <route-distinguisher>0</route-distinguisher>
                                   <network-address>f0ca::/48</network-address>
                                   </state>
                                   </route>
                                   </routes>
                                   </address-family>
                                   <address-family>
                                   <safi>link-state</safi>
                                   <afi>link-state</afi>
                                   <state>
                                   <safi>link-state</safi>
                                   <afi>link-state</afi>
                                   </state>
                                   </address-family>
                                   </rib>
                                   <address-families>
                                   <address-family>
                                   <afi>ipv6</afi>
                                   <safi>unicast</safi>
                                   <config>
                                   <afi>ipv6</afi>
                                   <safi>unicast</safi>
                                   </config>
                                   <state>
                                   <afi>ipv6</afi>
                                   <safi>unicast</safi>
                                   </state>
                                   <route-redisribute-lists>
                                   <route-redisribute-list>
                                   <protocol-type>connected</protocol-type>
                                   <config>
                                   <protocol-type>connected</protocol-type>

```

```

        </config>
        <state>
            <protocol-type>connected</protocol-type>
        </state>
    </route- redistribute-list>
    <route- redistribute-list>
        <protocol-type>static</protocol-type>
        <config>
            <protocol-type>static</protocol-type>
        </config>
        <state>
            <protocol-type>static</protocol-type>
        </state>
    </route- redistribute-list>
</route- redistribute-lists>
</address-family>
</address-families>
<peers>
    <peer>
        <peer-address>f0ca::10</peer-address>
        <address-families>
            <address-family>
                <afi>ipv6</afi>
                <safi>unicast</safi>
                <peer-adj-out-route>
                    <network-address>b0b0::/64</network-address>
                    <next-hop>
                        <next-hop-
address>f0ca::11 (fe80::5054:ff:fed0:8295)</next-hop-address>
                        <state>
                            <next-hop-
address>f0ca::11 (fe80::5054:ff:fed0:8295)</next-hop-address>
                            <peer-network-weight>32768</peer-
network-weight>
                            <bgp-as-path-string>Local</bgp-as-
path-string>
                            <bgp-as-path-4-byte-
origin>incomplete</bgp-as-path-4-byte-origin>
                            <ibgp-metric-route>0</ibgp-metric-
route>
                            <route-local-preference>100</route-
local-preference>
                            <last-update-route>2022-11-
20T22:42:24Z</last-update-route>
                            <reflector-client-route>false</
reflector-client-route>
                            <route-dampening-active>false</route-
dampening-active>
                            <history-route>false</history-route>
                            <med-flag-type-route>false</med-flag-
type-route>
                            <valid-route>true</valid-route>
                            <stale-route>false</stale-route>
                            <route-type>sourced</route-type>
                            <ecmp-multi-candidate-route>false</
ecmp-multi-candidate-route>
                            <multi-installed-route>false</multi-
installed-route>

```

```

aggregate-route>                                <atomic-aggregate-route>false</atomic-
                                                <selected-route>true</selected-route>
                                                <bgp-tx-path-id>-1</bgp-tx-path-id>
                                                <bgp-rx-path-id>-1</bgp-rx-path-id>
                                                </state>
</next-hop>
<state>
  <network-address>b0b0::/64</network-
address>
  </state>
</peer-adj-out-route>
<peer-adj-out-route>
  <network-address>f0ca::/48</network-address>
  <next-hop>
    <next-hop-
address>f0ca::11(fe80::5054:ff:fed0:8295)</next-hop-address>
    <state>
      <next-hop-
address>f0ca::11(fe80::5054:ff:fed0:8295)</next-hop-address>
      <peer-network-weight>32768</peer-
network-weight>
      <bgp-as-path-string>Local</bgp-as-
path-string>
      <bgp-as-path-4-byte-
origin>incomplete</bgp-as-path-4-byte-origin>
      <ibgp-metric-route>0</ibgp-metric-
route>
      <route-local-preference>100</route-
local-preference>
      <last-update-route>2022-11-
20T22:42:24Z</last-update-route>
      <reflector-client-route>false</
reflector-client-route>
      <route-dampening-active>false</route-
dampening-active>
      <history-route>false</history-route>
      <med-flag-type-route>false</med-flag-
type-route>
      <valid-route>true</valid-route>
      <stale-route>false</stale-route>
      <route-type>sourced</route-type>
      <ecmp-multi-candidate-route>false</
ecmp-multi-candidate-route>
      <multi-installed-route>false</multi-
installed-route>
      <atomic-aggregate-route>false</atomic-
aggregate-route>
      <selected-route>true</selected-route>
      <bgp-tx-path-id>-1</bgp-tx-path-id>
      <bgp-rx-path-id>-1</bgp-rx-path-id>
    </state>
  </next-hop>
  <state>
    <network-address>f0ca::/48</network-
address>
    </state>
  </peer-adj-out-route>
  <peer-adj-in-route>
    <network-address>b0b0::/64</network-address>

```

```

                                <next-hop>
                                <next-hop-
address>f0ca::10 (fe80::5054:ff:fe78:1f3) </next-hop-address>
                                <state>
                                <next-hop-
address>f0ca::10 (fe80::5054:ff:fe78:1f3) </next-hop-address>
                                <peer-network-weight>0</peer-network-
weight>
                                <bgp-as-path-string>300</bgp-as-path-
string>
                                <bgp-as-path-4-byte-
origin>incomplete</bgp-as-path-4-byte-origin>
                                <ibgp-metric-route>0</ibgp-metric-
route>
                                <network-remote-address-
route>192.168.122.52</network-remote-address-route>
                                <route-peer-address>f0ca::10</route-
peer-address>
                                <route-local-preference>100</route-
local-preference>
                                <last-update-route>1970-01-
01T00:00:00Z</last-update-route>
                                <reflector-client-route>false</
reflector-client-route>
                                <route-dampening-active>false</route-
dampening-active>
                                <history-route>false</history-route>
                                <nexthop-valid-route>false</nexthop-
valid-route>
                                <med-flag-type-route>false</med-flag-
type-route>
                                <valid-route>true</valid-route>
                                <stale-route>false</stale-route>
                                <route-type>external</route-type>
                                <ecmp-multi-candidate-route>false</
ecmp-multi-candidate-route>
                                <multi-installed-route>false</multi-
installed-route>
                                <atomic-aggregate-route>false</atomic-
aggregate-route>
                                <selected-route>true</selected-route>
                                <bgp-tx-path-id>0</bgp-tx-path-id>
                                <bgp-rx-path-id>0</bgp-rx-path-id>
                                </state>
                                </next-hop>
                                <state>
                                <network-address>b0b0::/64</network-
address>
                                </state>
                                </peer-adj-in-route>
                                <peer-adj-in-route>
                                <network-address>f0ca::/24</network-address>
                                <next-hop>
                                <next-hop-
address>f0ca::10 (fe80::5054:ff:fe78:1f3) </next-hop-address>
                                <state>
                                <next-hop-
address>f0ca::10 (fe80::5054:ff:fe78:1f3) </next-hop-address>
                                <peer-network-weight>0</peer-network-
weight>

```



```

string>                                <bgp-as-path-string>300</bgp-as-path-
origin>incomplete</bgp-as-path-4-byte-  <bgp-as-path-4-byte-
route>                                <ibgp-metric-route>0</ibgp-metric-
route>192.168.122.52</network-remote-address- <network-remote-address-
peer-address>                          <route-peer-address>f0ca::10</route-
local-preference>                      <route-local-preference>100</route-
01T00:00:00Z</last-update-route>        <last-update-route>1970-01-
reflector-client-route>                 <reflector-client-route>false</
dampening-active>                       <route-dampening-active>false</route-
valid-route>                            <history-route>false</history-route>
type-route>                             <nexthop-valid-route>false</nexthop-
                                          <med-flag-type-route>false</med-flag-
                                          <valid-route>true</valid-route>
                                          <stale-route>false</stale-route>
                                          <route-type>external</route-type>
                                          <ecmp-multi-candidate-route>false</
ecmp-multi-candidate-route>             <multi-installed-route>false</multi-
installed-route>                         <atomic-aggregate-route>false</atomic-
aggregate-route>                        <selected-route>true</selected-route>
                                          <bgp-tx-path-id>0</bgp-tx-path-id>
                                          <bgp-rx-path-id>0</bgp-rx-path-id>
                                          </state>
                                          </next-hop>
                                          <state>
                                          <network-address>f0ca::/24</network-
address>                                </state>
                                          </peer-adj-in-route>
<config>                                <afi>ipv6</afi>
                                          <safi>unicast</safi>
                                          <activate />
                                          <soft-reconfig-inbound />
</config>                               </config>
<state>                                  <afi>ipv6</afi>
                                          <safi>unicast</safi>
                                          <activate />
                                          <soft-reconfig-inbound />
                                          <community-count>0</community-count>
                                          <ipv6-next-hop-global>f0ca::11</ipv6-next-hop-
global>                                  <ipv6-next-hop-local>fe80::5054:ff:fed0:8295</
ipv6-next-hop-local>                    <remote-port>54786</remote-port>
                                          <remote-address>f0ca::10</remote-address>

```

```

<local-host>f0ca::11</local-host>
<ipv4-next-hop>192.168.122.60</ipv4-next-hop>
<local-port>179</local-port>
<peer-address-family-table-version>2</peer-
address-family-table-version>
family-table-version>
<prefix-count>2</prefix-count>
<send-prefix-count>2</send-prefix-count>
<count>1</count>
<connection-type>shared</connection-type>
<connection-established-count>1</connection-
established-count>
time>
<graceful-restart-time>0</graceful-restart-
established-up-time>
time>
<bgp-established-up-time>00:00:33</bgp-
interval>
time>
<last-read-time>00:00:05</last-read-time>
<bgp-peer-state>established</bgp-peer-state>
<link-type>external</link-type>
<router-id>192.168.122.52</router-id>
<advertisement-interval>30</advertisement-
keepalive>
time>
<calculated-hold-time>90</calculated-hold-
keepalive>
time>
<calculated-keepalive>30</calculated-
received-old-and-new</route-refresh-capability>
received</capability-ipv6-unicast>
<capability-ipv6-unicast>advertised-and-
received</capability-ipv6-unicast>
<counters>
messages>
<keepalive-in-messages>2</keepalive-in-
messages>
<keepalive-out-messages>2</keepalive-out-
count>
<open-messages-in>1</open-messages-in>
<open-messages-out>2</open-messages-out>
<as-path-count>2</as-path-count>
<update-message-in>1</update-message-in>
<update-message-out>1</update-message-out>
<received-packet-count>4</received-packet-
received-packet-count>
count>
<notification-in>0</notification-in>
<notification-out>0</notification-out>
<packet-in-queue>0</packet-in-queue>
<packet-out-queue>0</packet-out-queue>
<sent-packet-count>5</sent-packet-count>
received-packet-count>
<refresh-received-packet-count>0</refresh-
sent-packet-count>
<refresh-sent-packet-count>0</refresh-
</counters>
</state>
<peer-index>
<state>
<peer-index>1</peer-index>
<offset>0</offset>
<mask>0x2</mask>

```

```

        </state>
      </peer-index>
    </address-family>
  </address-families>
  <config>
    <peer-address>f0ca::10</peer-address>
    <peer-as>300</peer-as>
  </config>
  <state>
    <peer-address>f0ca::10</peer-address>
    <peer-as>300</peer-as>
  </state>
</peer>
</peers>
</bgp-instance>
</bgp-instances>
</bgp>

```

Validation with NetConf get

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <config>
      <name>default</name>
      <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
    </config>
    <state>
      <name>default</name>
      <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
    </state>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</identifier>
        <name>DIRECTLY_CONNECTED</name>
        <config>
          <identifier
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
          <name>DIRECTLY_CONNECTED</name>
          <enabled>true</enabled>
        </config>
        <state>
          <identifier
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
          <name>DIRECTLY_CONNECTED</name>
          <enabled>true</enabled>
        </state>
      </protocol>
    </protocols>
  </network-instance>
</network-instances>

```

```

    <identifier
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
    <name>200</name>
    <bgp>
      <global>
        <afi-safis>
          <afi-safi>
            <afi-safi-name
              xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
            <config>
              <afi-safi-name
                xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
                <enabled>true</enabled>
              </config>
              <state>
                <afi-safi-name
                  xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
                  <enabled>true</enabled>
                </state>
              </afi-safi>
            </afi-safis>
          </config>
          <as>200</as>
        </config>
        <state>
          <as>200</as>
          <total-prefixes>0</total-prefixes>
        </state>
      </global>
    <rib>
      <afi-safis>
        <afi-safi>
          <afi-safi-name
            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
          <ipv6-unicast>
            <loc-rib>
              <routes>
                <route>
                  <prefix>b0b0::/64</prefix>
                  <origin>0::0</origin>
                  <path-id>0</path-id>
                  <state>
                    <prefix>b0b0::/64</prefix>
                    <origin>0.0.0.0</origin>
                    <path-id>0</path-id>
                    <last-modified>1668984144</last-modified>
                    <valid-route>true</valid-route>
                  </state>
                </route>
                <route>
                  <prefix>f0ca::/24</prefix>
                  <origin>0::0</origin>
                  <path-id>0</path-id>

```

```
<state>
  <prefix>f0ca::/24</prefix>
  <origin>0.0.0.0</origin>
  <path-id>0</path-id>
  <last-modified>1668984206</last-modified>
  <valid-route>true</valid-route>
</state>
</route>
<route>
  <prefix>f0ca::/48</prefix>
  <origin>0::0</origin>
  <path-id>0</path-id>
  <state>
    <prefix>f0ca::/48</prefix>
    <origin>0.0.0.0</origin>
    <path-id>0</path-id>
    <last-modified>1668984144</last-modified>
    <valid-route>true</valid-route>
  </state>
</route>
</routes>
</loc-rib>
<neighbors>
  <neighbor>
    <neighbor-address>f0ca::10</neighbor-address>
    <state>
      <neighbor-address>f0ca::10</neighbor-address>
    </state>
    <adj-rib-out-post>
      <routes>
        <route>
          <prefix>b0b0::/64</prefix>
          <path-id>0</path-id>
          <state>
            <prefix>b0b0::/64</prefix>
            <path-id>0</path-id>
            <last-modified>1668984144</last-modified>
            <valid-route>true</valid-route>
          </state>
        </route>
        <route>
          <prefix>f0ca::/48</prefix>
          <path-id>0</path-id>
          <state>
            <prefix>f0ca::/48</prefix>
            <path-id>0</path-id>
            <last-modified>1668984144</last-modified>
            <valid-route>true</valid-route>
          </state>
        </route>
      </routes>
    </adj-rib-out-post>
    <adj-rib-in-post>
      <routes>
        <route>
          <prefix>b0b0::/64</prefix>
          <path-id>0</path-id>
```

```

        <state>
          <prefix>b0b0::/64</prefix>
          <path-id>0</path-id>
          <last-modified>0</last-modified>
          <valid-route>true</valid-route>
        </state>
      </route>
    </routes>
  </adj-rib-in-post>
</neighbor>
</neighbors>
</ipv6-unicast>
<state>
  <afi-safi-name
    xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
  </state>
</afi-safi>
</afi-safis>
</rib>
<neighbors>
  <neighbor>
    <neighbor-address>f0ca::10</neighbor-address>
    <afi-safis>
      <afi-safi>
        <afi-safi-name
          xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
        <config>
          <afi-safi-name
            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
            <enabled>true</enabled>
          </config>
        <state>
          <afi-safi-name
            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:IPV6_UNICAST</afi-safi-name>
            <enabled>true</enabled>
          </state>
        </afi-safi>
      </afi-safis>
    </neighbor>
  </neighbors>
  <config>
    <enabled>true</enabled>
    <neighbor-address>f0ca::10</neighbor-address>
    <peer-as>300</peer-as>
  </config>

```

```

        <state>
            <enabled>true</enabled>
            <neighbor-address>f0ca::10</neighbor-address>
            <peer-as>300</peer-as>
        </state>
    </neighbor>
</neighbors>
</bgp>
<config>
    <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
        <name>200</name>
        <enabled>true</enabled>
    </config>
    <state>
        <enabled>true</enabled>
        <identifier
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
            <name>200</name>
        </state>
    </protocol>
</protocols>
<tables>
    <table>
        <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
            <address-family
                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                <config>
                    <protocol
                        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                        <address-family
                            xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                            </config>
                        <state>
                            <protocol
                                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                                <address-family
                                    xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                                    </state>
                                </table>
                            <table>
                                <protocol
                                    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
                                    <address-family
                                        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
                                        <config>
                                            <protocol

```

```

        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        </config>
        <state>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        </state>
        </table>
        <table>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        <config>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        </config>
        <state>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        </state>
        </table>
        </tables>
        <interfaces>
        <interface>
        <id>eth0</id>
        <config>
        <id>eth0</id>
        <interface>eth0</interface>
        </config>
        </interface>
        <interface>
        <id>eth1</id>
        <config>
        <id>eth1</id>
        <interface>eth1</interface>
        </config>
        </interface>
        <interface>
        <id>eth2</id>
        <config>

```



```
        <id>eth2</id>
        <interface>eth2</interface>
    </config>
</interface>
<interface>
    <id>eth3</id>
    <config>
        <id>eth3</id>
        <interface>eth3</interface>
    </config>
</interface>
<interface>
    <id>eth4</id>
    <config>
        <id>eth4</id>
        <interface>eth4</interface>
    </config>
</interface>
<interface>
    <id>eth5</id>
    <config>
        <id>eth5</id>
        <interface>eth5</interface>
    </config>
</interface>
<interface>
    <id>eth6</id>
    <config>
        <id>eth6</id>
        <interface>eth6</interface>
    </config>
</interface>
<interface>
    <id>eth7</id>
    <config>
        <id>eth7</id>
        <interface>eth7</interface>
    </config>
</interface>
<interface>
    <id>eth8</id>
    <config>
        <id>eth8</id>
        <interface>eth8</interface>
    </config>
</interface>
<interface>
    <id>lo</id>
    <config>
        <id>lo</id>
        <interface>lo</interface>
    </config>
</interface>
</interfaces>
<table-connections>
    <table-connection>
        <src-protocol
```

```

        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</src-protocol>
        <dst-protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</dst-protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        <config>
        <dst-protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</dst-protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        <dst-instance xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-ni-
augments">200</dst-instance>
        <default-import-policy>ACCEPT_ROUTE</default-import-policy>
        <src-protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</src-protocol>
        </config>
        </table-connection>
        <table-connection>
        <src-protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:STATIC</src-protocol>
        <dst-protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</dst-protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        <config>
        <dst-protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</dst-protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        <dst-instance xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-ni-
augments">200</dst-instance>
        <default-import-policy>ACCEPT_ROUTE</default-import-policy>
        <src-protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:STATIC</src-protocol>
        </config>
        </table-connection>
        </table-connections>
        </network-instance>
        <network-instance>
        <name>management</name>
        <config>
        <name>management</name>
        <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
        </config>
        <state>

```

```

    <name>management</name>
    <type
      xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
    </state>
    <protocols>
      <protocol>
        <identifier
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</identifier>
          <name>DIRECTLY_CONNECTED</name>
          <config>
            <identifier
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
              <name>DIRECTLY_CONNECTED</name>
              <enabled>true</enabled>
            </config>
          </state>
          <identifier
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <enabled>true</enabled>
          </state>
        </protocol>
      </protocols>
      <tables>
        <table>
          <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
            <address-family
              xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
              <config>
                <protocol
                  xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                  <address-family
                    xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                    </config>
                  </state>
                </protocol>
                <protocol
                  xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                  <address-family
                    xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                    </state>
                </table>
              </table>
            </table>
            <table>
              <protocol
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
                <address-family
                  xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>

```

```

    <config>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        </config>
      <state>
        <protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
          <address-family
            xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
          </state>
        </table>
      </tables>
    </network-instance>
  </network-instances>

```

Restrictions

The containers related to RIB are status only on both Open Config and OcNOS datamodels, and there are no configuration related to this.

On OcNOS the containers are available only after the BGP negotiate routers, before it this tables are empty and could not be retrived.

The paths `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safi/afi-safi/ipv4-unicast/loc-rib/routes/route` and `/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safi/afi-safi/ipv6-unicast/loc-rib/routes/route` have some keys with fixed values, the table below show the values. Note the "X" indicate that is valid for IPv4 and IPv6 containers.

OpenConfig XPath	OcNOS XPath
<code>/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipvX-unicast/loc-rib/routes/route/origin</code>	Use fixed value: • IPv4: "0.0.0.0" • IPv6: "0::0"
<code>/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipvX-unicast/loc-rib/routes/route/path-id</code>	Fixed value "0"
<code>/oc-netinst:network-instances/network-instance/protocols/protocol/bgp/rib/afi-safis/afi-safi/ipvX-unicast/loc-rib/routes/route/prefix</code>	<code>/ipi-bgp:bgp/bgp-instances/bgp-instance/rib/address-family/routes/route/network-address</code>

OSPFv2 Openconfig Translation

Create OSPF Process

This XML configuration snippet is used to create OSPF process.

Release

This configuration was introduced in OcNOS version 4.2.

OpenConfig NETCONF Payload

Here is a sample OpenConfig NetConf Payload to create OSPF process.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe2</name>
    <config>
      <name>xe2</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <subinterfaces>
      <subinterface>
        <index>0</index>
        <ipv4 xmlns="http://openconfig.net/yang/interfaces/ip">
          <addresses>
            <address>
              <ip>10.10.10.1</ip>
              <config>
                <ip>10.10.10.1</ip>
                <prefix-length>24</prefix-length>
              </config>
            </address>
          </addresses>
        </ipv4>
        <config>
          <index>0</index>
        </config>
      </subinterface>
    </subinterfaces>
  </interface>
</interfaces>
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <protocols>
      <protocol xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">
```

```

<identifier>oc-pol-types:OSPF</identifier>
<name>100</name>
<config>
  <identifier xmlns:oc-pol-types="http://openconfig.net/
yang/policy-types">oc-pol-types:OSPF</identifier>
  <name>100</name>
  <enabled>true</enabled>
</config>
<ospfv2>
  <global>
    <config>
      <router-id>2.2.2.2</router-id>
    </config>
  </global>
  <areas>
    <area>
      <identifier>0.0.0.0</identifier>
      <config>
        <identifier>0.0.0.0</identifier>
      </config>
      <interfaces>
        <interface>
          <id>xe2</id>
          <config>
            <id>xe2</id>
            <network-type xmlns:oc-ospf-
types="http://openconfig.net/yang/ospf-types">oc-ospf-
types:NON_BROADCAST_NETWORK</network-type>
            <passive>true</passive>
            <authentication-type>simple</
authentication-type>
          </config>
          <interface-ref>
            <config>
              <interface>xe2</interface>
            </config>
          </interface-ref>
        </interface>
      </interfaces>
    </area>
  </areas>
</ospfv2>
</protocol>
</network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI command is used to create OSPF process.

```

ospf area-interface-config-mode
router ospf 100
  ospf router-id 2.2.2.2
  area 0.0.0.0 interface xe2
  area 0.0.0.0 interface xe2 passive
  area 0.0.0.0 interface xe2 network-type non-broadcast

```

```

    area 0.0.0.0 interface xe2 authentication
    !

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to create OSPF process.

```

<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe2</name>
    <config>
      <name>xe2</name>
    </config>
    <ipv4 xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-ip">
      <config>
        <primary-ip-addr>10.10.10.1/24</primary-ip-addr>
      </config>
    </ipv4>
  </interface>
</interfaces>
<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-network-instance">
  <network-instance>
    <instance-name>default</instance-name>
    <config>
      <instance-name>default</instance-name>
      <instance-type>vrf</instance-type>
    </config>
    <vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vrf">
      <config>
        <vrf-name>default</vrf-name>
      </config>
    </vrf>
    <bridge xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bridge">
      <config>
        <protocol>ieee-vlan-bridge</protocol>
      </config>
    </bridge>
  </network-instance>
</network-instances>
<ospfv2 xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-ospf">
  <processes>
    <process>
      <ospf-id>100</ospf-id>
      <config>
        <router-id>2.2.2.2</router-id>
        <ospf-id>100</ospf-id>
        <vrf-name>default</vrf-name>
      </config>
      <areas>
        <area>
          <area-id>0.0.0.0</area-id>
          <config>
            <area-id>0.0.0.0</area-id>
          </config>
          <interfaces>
            <interface>

```

```

                                <name>xe2</name>
                                <config>
                                  <name>xe2</name>
                                  <network-type>non-broadcast</network-type>
                                  <passive />
                                  <authentication-type>simple</authentication-
type>
                                </config>
                              </interface>
                            </interfaces>
                          </area>
                        </areas>
                      </process>
                    </processes>
                  <global>
                    <config>
                      <area-interface-config-mode />
                    </config>
                  </global>
                </ospfv2>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about creating OSPF process.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <config>
      <name>default</name>
      <type
xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
    </config>
    <protocols>
      <protocol>
        <identifier
xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:OSPF</identifier>
        <name>100</name>
        <ospfv2>
          <global>
            <config>
              <router-id>2.2.2.2</router-id>
            </config>
          </global>
          <areas>
            <area>
              <identifier>0.0.0.0</identifier>
              <config>
                <identifier>0.0.0.0</identifier>
              </config>
              <state>
                <identifier>0.0.0.0</identifier>
              </state>
              <interfaces>
                <interface>

```



```

        <id>xe2</id>
        <config>
            <id>xe2</id>
            <network-type
ospf-types">oc-ospf-types:NON_BROADCAST_NETWORK</network-type>
            <passive>true</passive>
            <authentication-type>simple</authentication-type>
        </config>
        <interface-ref>
            <config>
                <interface>xe2</interface>
            </config>
        </interface-ref>
        <state>
            <id>xe2</id>
            <network-type
ospf-types">oc-ospf-types:NON_BROADCAST_NETWORK</network-type>
            <passive>true</passive>
            <authentication-type>simple</authentication-type>
        </state>
        </interface>
    </interfaces>
</area>
</areas>
</ospfv2>
<config>
    <identifier
types">oc-pol-types:OSPF</identifier>
        <name>100</name>
        <enabled>true</enabled>
    </config>
</protocol>
</protocols>
<tables>
    <table>
        <protocol
pol-types:OSPF</protocol>
            <address-family
types:IPv4</address-family>
            <config>
                <protocol
types">oc-pol-types:OSPF</protocol>
                    <address-family
types">oc-types:IPv4</address-family>
                    </config>
                </table>
            </tables>
        </network-instance>
        <network-instance>
            <name>management</name>
            <config>

```

```

    <name>management</name>
    <type
      xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
    </config>
  </network-instance>
</network-instances>

```

Restrictions

Area /network-instances/network-instance/protocols/protocol/ospfv2/areas/area must always be set with at least one interface /network-instances/network-instance/protocols/protocol/ospfv2/areas/area/interfaces/interface.

Create OSPF Process

This XML configuration snippet is used to create OSPF process.

Release

This configuration was introduced in OcNOS version 6.3.

OpenConfig NETCONF Payload

Here is a sample OpenConfig NetConf Payload to create OSPF process.

```

<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>eth1</name>
    <config>
      <name>eth1</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <subinterfaces>
      <subinterface>
        <index>0</index>
        <ipv4 xmlns="http://openconfig.net/yang/interfaces/ip">
          <addresses>
            <address>
              <ip>10.10.10.1</ip>
              <config>
                <ip>10.10.10.1</ip>
                <prefix-length>24</prefix-length>
              </config>
            </address>
          </addresses>
        </ipv4>
      </config>
    </subinterface>
  </subinterfaces>

```

```

    </interface>
    <interface>
      <name>eth2</name>
      <config>
        <name>eth2</name>
        <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
      </config>
      <subinterfaces>
        <subinterface>
          <index>0</index>
          <ipv4 xmlns="http://openconfig.net/yang/interfaces/ip">
            <addresses>
              <address>
                <ip>20.20.20.1</ip>
                <config>
                  <ip>20.20.20.1</ip>
                  <prefix-length>24</prefix-length>
                </config>
              </address>
            </addresses>
          </ipv4>
          <config>
            <index>0</index>
          </config>
        </subinterface>
      </subinterfaces>
    </interface>
  </interfaces>
  <network-instances xmlns="http://openconfig.net/yang/network-instance">
    <network-instance>
      <name>default</name>
      <protocols>
        <protocol xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">
          <identifier>oc-pol-types:OSPF</identifier>
          <name>100</name>
          <config>
            <identifier xmlns:oc-pol-types="http://openconfig.net/
yang/policy-types">oc-pol-types:OSPF</identifier>
            <name>100</name>
            <enabled>true</enabled>
          </config>
          <ospfv2>
            <global>
              <config>
                <router-id>1.1.1.1</router-id>
                <log-adjacency-changes>true</log-adjacency-
changes>
                <summary-route-cost-mode>RFC1583_COMPATIBLE</
summary-route-cost-mode>
              </config>
            <mpls>
              <config>
                <traffic-engineering-extensions>false</
traffic-engineering-extensions>
              </config>
            </mpls>
          </ospfv2>
        </protocol>
      </protocols>
    </network-instance>
  </network-instances>

```

```

    <graceful-restart>
      <config>
        <enabled>>false</enabled>
      </config>
    </graceful-restart>
  </timers>
  <max-metric>
    <config>
      <set>>true</set>
      <include>MAX_METRIC_INCLUDE_STUB</include>
    </config>
  </max-metric>
  <lsa-generation>
    <config>
      <initial-delay>100</initial-delay>
      <maximum-delay>100</maximum-delay>
    </config>
  </lsa-generation>
  <spf>
    <config>
      <initial-delay>400</initial-delay>
      <maximum-delay>4000</maximum-delay>
    </config>
  </spf>
</timers>
</global>
<areas>
  <area>
    <identifier>0.0.0.0</identifier>
    <config>
      <identifier>0.0.0.0</identifier>
    </config>
    <interfaces>
      <interface>
        <id>eth1</id>
        <config>
          <id>eth1</id>
          <passive>>true</passive>
          <priority>255</priority>
          <network-type xmlns:oc-ospf-
types="http://openconfig.net/yang/ospf-types">oc-ospf-
types:POINT_TO_POINT_NETWORK</network-type>
          <authentication-type>message-digest</
authentication-type>
          <metric>65535</metric>
        </config>
      <interface-ref>
        <config>
          <interface>eth1</interface>
        </config>
      </interface-ref>
      <enable-bfd>
        <config>
          <enabled>true</enabled>
        </config>
      </enable-bfd>
      <lsa-filter>

```

```

                                <config>
                                    <all>true</all>
                                </config>
                            </lsa-filter>
                        <mpls>
                            <config>
                                <traffic-engineering-metric>1</
traffic-engineering-metric>
                                </config>
                            <igp-ldp-sync>
                                <config>
                                    <enabled>true</enabled>
                                    <post-session-up-delay>1000</
post-session-up-delay>
                                </config>
                            </igp-ldp-sync>
                        </mpls>
                    <timers>
                        <config>
                            <dead-interval>2</dead-interval>
                            <hello-interval>1</hello-interval>
                            <retransmission-interval>1</
retransmission-interval>
                        </config>
                    </timers>
                </interface>
            </interfaces>
        </area>
        <area>
            <identifier>1.1.1.1</identifier>
            <config>
                <identifier>1.1.1.1</identifier>
            </config>
            <interfaces>
                <interface>
                    <id>eth2</id>
                    <config>
                        <id>eth2</id>
                    </config>
                    <interface-ref>
                        <config>
                            <interface>eth2</interface>
                        </config>
                    </interface-ref>
                </interface>
            </interfaces>
            <virtual-links>
                <virtual-link>
                    <remote-router-id>10.143.74.1</remote-
router-id>
                    <config>
                        <remote-router-id>10.143.74.1</remote-
router-id>
                    </config>
                </virtual-link>
            </virtual-links>
        </area>
    </areas>

```

```

        </ospfv2>
    </protocol>
</protocols>
</network-instance>
</network-instances>

```

OcNOS CLI Command

The below CLI command is used to create OSPF process.

```

ospf area-interface-config-mode
router ospf 100
  ospf router-id 1.1.1.1
  max-metric router-lsa include-stub
  compatible rfc1583
  log-adjacency-changes detail
  no capability restart graceful
  timers spf exp 400 4000
  timers throttle lsa all 100 100 100
  area 0.0.0.0 interface eth1
  area 0.0.0.0 interface eth1 passive
  area 0.0.0.0 interface eth1 cost 65535
  area 0.0.0.0 interface eth1 network-type point-to-point
  area 0.0.0.0 interface eth1 priority 255
  area 0.0.0.0 interface eth1 authentication message-digest
  area 0.0.0.0 interface eth1 bfd
  area 0.0.0.0 interface eth1 database-filter all out
  area 0.0.0.0 interface eth1 te-metric 1
  area 0.0.0.0 interface eth1 mpls ldp-igp sync ospf holddown-timer 1
  area 0.0.0.0 interface eth1 dead-interval 2
  area 0.0.0.0 interface eth1 hello-interval 1
  area 0.0.0.0 interface eth1 retransmit-interval 1
  area 1.1.1.1 interface eth2
  area 1.1.1.1 virtual-link 10.143.74.1
  no capability traffic-engineering
  no capability cspf
!

```

OcNOS NETCONF Payload

Here is a sample OcNOS NetConf Payload to create OSPF process.

```

<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>eth1</name>
    <config>
      <name>eth1</name>
    </config>
    <ipv4 xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-ip">
      <config>
        <primary-ip-addr>10.10.10.1/24</primary-ip-addr>
      </config>
    </ipv4>
  </interface>
  <interface>
    <name>eth2</name>

```

```

    <config>
      <name>eth2</name>
    </config>
  <ipv4 xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-ip">
    <config>
      <primary-ip-addr>20.20.20.1/24</primary-ip-addr>
    </config>
  </ipv4>
</interface>
</interfaces>
<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-network-
instance">
  <network-instance>
    <instance-name>default</instance-name>
    <config>
      <instance-name>default</instance-name>
      <instance-type>vrf</instance-type>
    </config>
    <vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vrf">
      <config>
        <vrf-name>default</vrf-name>
      </config>
    </vrf>
    <bridge xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bridge">
      <config>
        <protocol>ieee-vlan-bridge</protocol>
      </config>
    </bridge>
  </network-instance>
</network-instances>
<ospfv2 xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-ospf">
  <processes>
    <process>
      <ospf-id>100</ospf-id>
      <config>
        <router-id>1.1.1.1</router-id>
        <ospf-id>100</ospf-id>
        <vrf-name>default</vrf-name>
      </config>
      <capability>
        <config>
          <disable-traffic-engineering />
          <disable-graceful-restart />
        </config>
      </capability>
      <max-metric>
        <config>
          <enable-max-router-lsa />
          <include-stub />
        </config>
      </max-metric>
      <timers>
        <lsa>
          <delays>
            <delay>
              <start-delay>100</start-delay>
              <min-delay>100</min-delay>
            </delay>
          </delays>
        </lsa>
      </timers>
    </process>
  </processes>
</ospfv2>

```

```

        <max-delay>100</max-delay>
        <config>
            <start-delay>100</start-delay>
            <min-delay>100</min-delay>
            <max-delay>100</max-delay>
        </config>
    </delay>
</delays>
</lsa>
<spf>
    <delay>
        <config>
            <min-delay>400</min-delay>
            <max-delay>4000</max-delay>
        </config>
    </delay>
</spf>
</timers>
<areas>
    <area>
        <area-id>0.0.0.0</area-id>
        <config>
            <area-id>0.0.0.0</area-id>
        </config>
        <interfaces>
            <interface>
                <name>eth1</name>
                <config>
                    <name>eth1</name>
                    <passive/>
                    <priority>255</priority>
                    <network-type>point-to-point</network-type>
                    <authentication-type>message-digest</
authentication-type>
                    <cost>65535</cost>
                </config>
            </enable-bfd>
            <config>
                <enabled>enable</enabled>
            </config>
        </enable-bfd>
        <lsa-filter>
            <config>
                <filter-out/>
            </config>
        </lsa-filter>
        <mpls>
            <config>
                <traffic-engineering-metric>1</traffic-
engineering-metric>
            </config>
        <igp-ldp-sync>
            <config>
                <ldp-igp-sync-enable/>
                <holddown-timer>1</holddown-timer>
            </config>
        </igp-ldp-sync>

```



```

        </mpls>
        <timers>
            <config>
                <dead-interval>2</dead-interval>
                <hello-interval>1</hello-interval>
                <retransmission-interval>1</
retransmission-interval>
            </config>
        </timers>
    </interface>
</interfaces>
</area>
<area>
    <area-id>1.1.1.1</area-id>
    <config>
        <area-id>1.1.1.1</area-id>
    </config>
    <interfaces>
        <interface>
            <name>eth2</name>
            <config>
                <name>eth2</name>
            </config>
        </interface>
    </interfaces>
    <virtual-links>
        <virtual-link>
            <remote-router-id>10.143.74.1</remote-router-id>
            <config>
                <remote-router-id>10.143.74.1</remote-router-
id>
            </config>
        </virtual-link>
    </virtual-links>
</area>
</areas>
</process>
</processes>
<global>
    <config>
        <area-interface-config-mode/>
    </config>
</global>
</ospfv2>

```

Validation with NETCONF get

Here is a NetConf validation response that provides detailed information about creating OSPF process.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <config>
      <name>default</name>
      <type
xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>

```

```

    </config>
    <protocols>
      <protocol>
        <identifier>
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
          <name>DIRECTLY_CONNECTED</name>
          <config>
            <identifier>
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
              <name>DIRECTLY_CONNECTED</name>
              <enabled>true</enabled>
            </config>
          </protocol>
        </protocol>
        <identifier>
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:OSPF</identifier>
          <name>100</name>
          <ospfv2>
            <global>
              <config>
                <router-id>1.1.1.1</router-id>
                <summary-route-cost-mode>RFC1583_COMPATIBLE</summary-route-
cost-mode>
                <log-adjacency-changes>true</log-adjacency-changes>
              </config>
              <mpls>
                <config>
                  <traffic-engineering-extensions>>false</traffic-
engineering-extensions>
                </config>
              </mpls>
              <graceful-restart>
                <config>
                  <enabled>>false</enabled>
                </config>
              </graceful-restart>
              <timers>
                <lsa-generation>
                  <config>
                    <initial-delay>100</initial-delay>
                    <maximum-delay>100</maximum-delay>
                  </config>
                </lsa-generation>
                <spf>
                  <config>
                    <initial-delay>400</initial-delay>
                    <maximum-delay>4000</maximum-delay>
                  </config>
                </spf>
                <max-metric>
                  <config>
                    <set>true</set>
                    <include
types">oc-ospf-types:MAX_METRIC_INCLUDE_STUB</include>

```

```

        </config>
      </max-metric>
    </timers>
  </global>
  <areas>
    <area>
      <identifier>0.0.0.0</identifier>
      <config>
        <identifier>0.0.0.0</identifier>
      </config>
      <interfaces>
        <interface>
          <id>eth1</id>
          <config>
            <id>eth1</id>
            <metric>65535</metric>
            <network-type
ospf-types">oc-ospf-types:POINT_TO_POINT_NETWORK</network-type>
            <passive>true</passive>
            <priority>255</priority>
            <authentication-type>message-digest</authentication-
type>
          </config>
          <interface-ref>
            <config>
              <interface>eth1</interface>
            </config>
          </interface-ref>
          <enable-bfd>
            <config>
              <enabled>true</enabled>
            </config>
          </enable-bfd>
          <lsa-filter>
            <config>
              <all>true</all>
            </config>
          </lsa-filter>
          <mpls>
            <config>
              <traffic-engineering-metric>1</traffic-engineering-
metric>
            </config>
            <igp-ldp-sync>
              <config>
                <enabled>true</enabled>
                <post-session-up-delay>1000</post-session-up-
delay>
              </config>
            </igp-ldp-sync>
          </mpls>
        </timers>
        <config>
          <dead-interval>2</dead-interval>
          <hello-interval>1</hello-interval>
          <retransmission-interval>1</retransmission-interval>

```

```

        </config>
      </timers>
    </interface>
  </interfaces>
</area>
<area>
  <identifier>1.1.1.1</identifier>
  <config>
    <identifier>1.1.1.1</identifier>
  </config>
  <interfaces>
    <interface>
      <id>eth2</id>
      <config>
        <id>eth2</id>
      </config>
      <interface-ref>
        <config>
          <interface>eth2</interface>
        </config>
      </interface-ref>
    </interface>
  </interfaces>
  <virtual-links>
    <virtual-link>
      <remote-router-id>10.143.74.1</remote-router-id>
      <config>
        <remote-router-id>10.143.74.1</remote-router-id>
      </config>
    </virtual-link>
  </virtual-links>
</area>
</areas>
</ospfv2>
<config>
  <identifier
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:OSPF</identifier>
    <name>100</name>
    <enabled>true</enabled>
  </config>
</protocol>
</protocols>
<tables>
  <table>
    <protocol
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:OSPF</protocol>
      <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
      <config>
        <protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:OSPF</protocol>
          <address-family
            xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">oc-types:IPv4</address-family>

```

```
        </config>
      </table>
    </tables>
  </network-instance>
  <network-instance>
    <name>management</name>
    <config>
      <name>management</name>
      <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
      </config>
    </tables>
  </network-instance>
</network-instances>
```

Restrictions

In OpenConfig, for path `/network-instances/network-instance/protocols/protocol/ospfv2/areas/area/interfaces/interface/mpls/igp-ldp-sync/config/post-session-up-delay`, only steps of 1000 by 1000 should be configured. The values are rounded in Get operation in order to prevent broken values from being configured and presented.

Interface Configuration OpenConfig Translation

Configure Interfaces

This XML configuration snippet is used to define and configure network interfaces.

Release

This configuration was introduced in OcNOS version 5.0.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload for Interface Configuration.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <enabled>true</enabled>
      <mtu>1450</mtu>
      <description>Test desc for the interface</description>
      <tpid xmlns="http://openconfig.net/yang/vlan" xmlns:oc-vlan-
types="http://openconfig.net/yang/vlan-types">oc-vlan-types:TPID_0X88A8</tpid>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
      <config>
        <duplex-mode>FULL</duplex-mode>
        <auto-negotiate>false</auto-negotiate>
        <port-speed xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_1GB</port-speed>
      </config>
    </ethernet>
    <subinterfaces>
      <subinterface>
        <index>2</index>
        <config>
          <index>2</index>
          <description>Test subinterface double tagged</description>
          <enabled>true</enabled>
        </config>
        <ipv4 xmlns="http://openconfig.net/yang/interfaces/ip">
          <addresses>
            <address>
              <ip>30.1.1.1</ip>
              <config>
                <ip>30.1.1.1</ip>
                <prefix-length>24</prefix-length>
```

```

        </config>
      </address>
    <address>
      <ip>40.10.10.10</ip>
      <config>
        <ip>40.10.10.10</ip>
        <prefix-length>24</prefix-length>
      </config>
    </address>
  </addresses>
</ipv4>
</subinterface>
</subinterfaces>
</interface>
</interfaces>

```

OcNOS CLI Command

The below CLI commands are used for Interface Configuration.

```

interface xe10
description "Test desc for the interface"
speed 1g
duplex full
mtu 1450
switchport dot1q ethertype 0x88A8
no shutdown

interface xe10.2
description "Test subinterface double tagged"
ip address 30.1.1.1/24
ip address 40.10.10.10/24 secondary
no shutdown
encapsulation dot1ad 10 inner-dot1q 200

```

OcNOS NetConf Payload

Here is the sample OcNOS NetConf Payload for Interface Configuration.

```

<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <enabled>true</enabled>
      <mtu>1450</mtu>
      <description>Test desc for the interface</description>
    </config>
    <extended xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-extended">
      <config>
        <dot1q-ether-type>0x88A8</dot1q-ether-type>
      </config>
    </extended>
    <ethernet xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-ethernet">
      <config>

```

```

        <duplex-mode>full</duplex-mode>
        <port-speed>1g</port-speed>
    </config>
</ethernet>
</interface>
<interface>
    <name>xe10.2</name>
    <config>
        <name>xe10.2</name>
        <description>Test subinterface double tagged</description>
        <enabled>true</enabled>
    </config>
    <ipv4 xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-ip">
        <secondary-addresses>
            <ip-address>40.10.10.10/24</ip-address>
            <config>
                <ip-address>40.10.10.10/24</ip-address>
            </config>
        </secondary-addresses>
        <config>
            <primary-ip-addr>30.1.1.1/24</primary-ip-addr>
        </config>
    </ipv4>
</interface>
</interfaces>

```

Validation with NetConf get

Here is a NetConf validation response for interface configuration, providing details about the current state of the specified interface.

```

<interfaces xmlns="http://openconfig.net/yang/interfaces">
    <interface>
        <name>xe10</name>
        <config>
            <name>xe10</name>
            <mtu>1450</mtu>
            <tpid xmlns="http://openconfig.net/yang/vlan" xmlns:oc-vlan-
types="http://openconfig.net/yang/vlan-types">oc-vlan-types:TPID_0X8100</tpid>
            <description>Test desc for the interface</description>
            <type
                xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
            </config>
            <state>
                <name>xe10</name>
                <mtu>1450</mtu>
                <tpid xmlns="http://openconfig.net/yang/vlan-types">TPID_0X8100</
tpid>
                <description>Test desc for the interface</description>
                <logical>false</logical>
                <last-change>0</last-change>
                <oper-status>DOWN</oper-status>
                <admin-status>UP</admin-status>
                <ifindex>10010</ifindex>
                <counters>
                    <last-clear>0</last-clear>

```



```

        <out-errors>0</out-errors>
        <out-discards>0</out-discards>
        <out-multicast-pkts>0</out-multicast-pkts>
        <out-broadcast-pkts>0</out-broadcast-pkts>
        <out-unicast-pkts>0</out-unicast-pkts>
        <out-pkts>0</out-pkts>
        <out-octets>0</out-octets>
        <in-fcs-errors>0</in-fcs-errors>
        <in-errors>0</in-errors>
        <in-discards>0</in-discards>
        <in-multicast-pkts>0</in-multicast-pkts>
        <in-broadcast-pkts>0</in-broadcast-pkts>
        <in-unicast-pkts>0</in-unicast-pkts>
        <in-pkts>0</in-pkts>
        <in-octets>0</in-octets>
    </counters>
    <type
      xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </state>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
      <config>
        <duplex-mode>FULL</duplex-mode>
        <auto-negotiate>false</auto-negotiate>
        <port-speed
          xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_1GB</port-speed>
        </config>
        <state>
          <duplex-mode>FULL</duplex-mode>
          <port-speed
            xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_1GB</port-speed>
          <negotiated-port-speed
            xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_1GB</negotiated-port-speed>
          <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
          <hw-mac-address>b86a.9729.abc5</hw-mac-address>
        </state>
      </ethernet>
    <subinterfaces>
      <subinterface>
        <index>0</index>
        <ipv4 xmlns="http://openconfig.net/yang/interfaces/ip">
          <config>
            <mtu>1450</mtu>
          </config>
        </ipv4>
        <config>
          <index>0</index>
        </config>
        <ipv6 xmlns="http://openconfig.net/yang/interfaces/ip">
          <config>
            <mtu>1450</mtu>
          </config>
        </ipv6>
      </subinterface>

```

```
</subinterfaces>
</interface>
</interfaces>
```

Restrictions

The leaf mentioned below has been restricted to a maximum of 32 characters.

```
/interfaces/interface/name
```

As a general restriction, interface names must have valid OcNOS naming conventions, such as 'eth,' 'xe,' 'ce,' 'so,' 'po,' etc. This naming convention is not configurable.

Configure Description

This XML configuration snippet is used to assign a description to a given interface.

Release

This configuration was introduced in OcNOS version 4.2.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload to configure interface description.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <enabled>true</enabled>
      <description>Test desc for the interface</description>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
  </interface>
</interfaces>
```

OcNOS CLI Command

The below CLI command is used for configuring interface descriptions.

```
interface xe10
description "Test desc for the interface"
no shutdown
```

OcNOS NetConf Payload

Here is the sample OcNOS NetConf Payload for configuring interface descriptions.

```
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe10</name>
    <config>
```

```

        <name>xe10</name>
        <enabled>true</enabled>
        <description>Test desc for the interface</description>
    </config>
</interface>
</interfaces>

```

Validation with NetConf get

Here is a NetConf validation response for configuring interface descriptions, providing details about the current state of the specified interface.

```

<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <tpid xmlns="http://openconfig.net/yang/vlan" xmlns:oc-vlan-
types="http://openconfig.net/yang/vlan-types">oc-vlan-types:TPID_0X8100</tpid>
      <description>Test desc for the interface</description>
      <type
        xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <state>
      <name>xe10</name>
      <tpid xmlns="http://openconfig.net/yang/vlan-types">TPID_0X8100</
tpid>
      <description>Test desc for the interface</description>
      <logical>false</logical>
      <last-change>0</last-change>
      <oper-status>DOWN</oper-status>
      <admin-status>UP</admin-status>
      <ifindex>10010</ifindex>
      <counters>
        <last-clear>0</last-clear>
        <out-errors>0</out-errors>
        <out-discards>0</out-discards>
        <out-multicast-pkts>0</out-multicast-pkts>
        <out-broadcast-pkts>0</out-broadcast-pkts>
        <out-unicast-pkts>0</out-unicast-pkts>
        <out-pkts>0</out-pkts>
        <out-octets>0</out-octets>
        <in-fcs-errors>0</in-fcs-errors>
        <in-errors>0</in-errors>
        <in-discards>0</in-discards>
        <in-multicast-pkts>0</in-multicast-pkts>
        <in-broadcast-pkts>0</in-broadcast-pkts>
        <in-unicast-pkts>0</in-unicast-pkts>
        <in-pkts>0</in-pkts>
        <in-octets>0</in-octets>
      </counters>
      <type
        xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </state>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">

```

```
<state>
  <negotiated-port-speed
    xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_10GB</negotiated-port-speed>
  <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
  <hw-mac-address>b86a.97c3.6447</hw-mac-address>
</state>
</ethernet>
<subinterfaces>
  <subinterface>
    <index>0</index>
    <config>
      <index>0</index>
    </config>
  </subinterface>
</subinterfaces>
</interface>
</interfaces>
```

Restrictions

The leaf mentioned below has been restricted to a maximum of 32 characters.

```
/interfaces/interface/name
```

Configure MTU

This XML configuration snippet is used to set the Maximum Transmission Unit (MTU) for an interface.

Release

This configuration was introduced in OcNOS version 4.2.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload to set the MTU for an interface.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xel0</name>
    <config>
      <name>xel0</name>
      <enabled>true</enabled>
      <mtu>1450</mtu>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
  </interface>
</interfaces>
```

OcNOS CLI Command

The below CLI command is used to set the MTU for an interface.

```

interface xe10
mtu 1450
no shutdown

```

OcNOS NetConf Payload

Here is the sample OcNOS NetConf Payload to set the MTU for an interface.

```

<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <enabled>true</enabled>
      <mtu>1450</mtu>
    </config>
  </interface>
</interfaces>

```

Validation with NetConf get

Here is a NetConf validation response for setting the MTU for an interface, providing details about the current state of the specified interface.

```

      <interfaces xmlns="http://openconfig.net/yang/interfaces">
        <interface>
          <name>xe10</name>
          <config>
            <name>xe10</name>
            <mtu>1450</mtu>
            <tpid xmlns="http://openconfig.net/yang/vlan" xmlns:oc-vlan-
types="http://openconfig.net/yang/vlan-types">oc-vlan-types:TPID_0X8100</tpid>
            <type
              xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
            </config>
            <state>
              <name>xe10</name>
              <mtu>1450</mtu>
              <tpid xmlns="http://openconfig.net/yang/vlan-types">TPID_0X8100</
tpid>
              <logical>false</logical>
              <last-change>0</last-change>
              <oper-status>DOWN</oper-status>
              <admin-status>UP</admin-status>
              <ifindex>10010</ifindex>
              <counters>
                <last-clear>0</last-clear>
                <out-errors>0</out-errors>
                <out-discards>0</out-discards>
                <out-multicast-pkts>0</out-multicast-pkts>
                <out-broadcast-pkts>0</out-broadcast-pkts>
                <out-unicast-pkts>0</out-unicast-pkts>
                <out-pkts>0</out-pkts>
                <out-octets>0</out-octets>
                <in-fcs-errors>0</in-fcs-errors>
                <in-errors>0</in-errors>

```

```

        <in-discards>0</in-discards>
        <in-multicast-pkts>0</in-multicast-pkts>
        <in-broadcast-pkts>0</in-broadcast-pkts>
        <in-unicast-pkts>0</in-unicast-pkts>
        <in-pkts>0</in-pkts>
        <in-octets>0</in-octets>
    </counters>
    <type
type">ianaift:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </state>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
    <state>
        <negotiated-port-speed
ethernet">oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_10GB</negotiated-port-speed>
        <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
        <hw-mac-address>b86a.97c3.6447</hw-mac-address>
    </state>
    </ethernet>
    <subinterfaces>
    <subinterface>
        <index>0</index>
        <ipv4 xmlns="http://openconfig.net/yang/interfaces/ip">
        <config>
            <mtu>1450</mtu>
        </config>
        </ipv4>
        <config>
            <index>0</index>
        </config>
        <ipv6 xmlns="http://openconfig.net/yang/interfaces/ip">
        <config>
            <mtu>1450</mtu>
        </config>
        </ipv6>
    </subinterface>
    </subinterfaces>
    </interface>
</interfaces>

```

Restrictions

The leaf mentioned below has been restricted to a maximum of 32 characters.

/interfaces/interface/name

The leaf mentioned below is used only to configure the physical interface.

/interfaces/interface/config/mtu

Configure Primary IP Address

This XML configuration snippet is used to specify that an IP address and prefix length will be used by the interface.

Release

This configuration was introduced in OcNOS version 4.2.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload to indicate that the interface will use an IP address and a prefix length.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <enabled>true</enabled>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <subinterfaces>
      <subinterface>
        <index>0</index>
        <ipv4 xmlns="http://openconfig.net/yang/interfaces/ip">
          <addresses>
            <address>
              <ip>30.1.1.1</ip>
              <config>
                <ip>30.1.1.1</ip>
                <prefix-length>24</prefix-length>
              </config>
            </address>
          </addresses>
        </ipv4>
      </subinterface>
    </subinterfaces>
  </interface>
</interfaces>
```

OcNOS CLI Command

The below CLI command is used to configure an IP address and prefix length for an interface.

```
interface xe10
ip address 30.1.1.1/24
no shutdown
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload for assigning a primary IP address and prefix length to an interface.

```
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe10</name>
```

```

<config>
  <name>xe10</name>
  <enabled>true</enabled>
</config>
<ipv4 xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-ip">
  <config>
    <primary-ip-addr>30.1.1.1/24</primary-ip-addr>
  </config>
</ipv4>
</interface>
</interfaces>

```

Validation with NetConf get

Here is a NetConf validation response for assigning a primary IP address and prefix length to an interface, providing details about the current state of the specified interface.

```

      <interfaces xmlns="http://openconfig.net/yang/interfaces">
<interface>
  <name>xe10</name>
  <config>
    <name>xe10</name>
    <tpid xmlns="http://openconfig.net/yang/vlan" xmlns:oc-vlan-
types="http://openconfig.net/yang/vlan-types">oc-vlan-types:TPID_0X8100</tpid>
    <type
      xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <state>
      <name>xe10</name>
      <tpid xmlns="http://openconfig.net/yang/vlan-types">TPID_0X8100</
tpid>
      <logical>false</logical>
      <last-change>0</last-change>
      <oper-status>DOWN</oper-status>
      <admin-status>UP</admin-status>
      <ifindex>10010</ifindex>
      <counters>
        <last-clear>0</last-clear>
        <out-errors>0</out-errors>
        <out-discards>0</out-discards>
        <out-multicast-pkts>0</out-multicast-pkts>
        <out-broadcast-pkts>0</out-broadcast-pkts>
        <out-unicast-pkts>0</out-unicast-pkts>
        <out-pkts>0</out-pkts>
        <out-octets>0</out-octets>
        <in-fcs-errors>0</in-fcs-errors>
        <in-errors>0</in-errors>
        <in-discards>0</in-discards>
        <in-multicast-pkts>0</in-multicast-pkts>
        <in-broadcast-pkts>0</in-broadcast-pkts>
        <in-unicast-pkts>0</in-unicast-pkts>
        <in-pkts>0</in-pkts>
        <in-octets>0</in-octets>
      </counters>
    </state>
  </interface>
</interfaces>

```



```

        xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </state>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
        <state>
            <negotiated-port-speed
ethernet">oc-eth:SPEED_10GB</negotiated-port-speed>
            <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
            <hw-mac-address>b86a.97c3.6447</hw-mac-address>
        </state>
    </ethernet>
    <subinterfaces>
        <subinterface>
            <index>0</index>
            <ipv4 xmlns="http://openconfig.net/yang/interfaces/ip">
                <addresses>
                    <address>
                        <ip>30.1.1.1</ip>
                        <config>
                            <ip>30.1.1.1</ip>
                            <prefix-length>24</prefix-length>
                        </config>
                        <state>
                            <ip>30.1.1.1</ip>
                            <prefix-length>24</prefix-length>
                        </state>
                    </address>
                </addresses>
            </ipv4>
            <config>
                <index>0</index>
            </config>
        </subinterface>
    </subinterfaces>
</interface>
</interfaces>

```

Restrictions

The leaf mentioned below has been restricted to a maximum of 32 characters.

```
/interfaces/interface/name
```

The first entry on the below list will be used as the primary address, as OpenConfig does not have this concept.

```
/interfaces/interface/subinterfaces/subinterface/ipv4/addresses/address
```

Configure Secondary IP Address

This XML configuration snippet specifies the use of a secondary IP address and prefix length for an interface. It's important to note that the secondary address cannot be configured if there is no primary IP address present.

Release

This configuration was introduced in OcNOS version 4.2.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf payload that specifies the configuration for an interface. This configuration includes the interface type, subinterface details, and IPv4 addresses with their respective prefix lengths.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <subinterfaces>
      <subinterface>
        <index>0</index>
        <ipv4 xmlns="http://openconfig.net/yang/interfaces/ip">
          <addresses>
            <address>
              <ip>10.10.10.1</ip>
              <config>
                <ip>10.10.10.1</ip>
                <prefix-length>24</prefix-length>
              </config>
            </address>
            <address>
              <ip>11.11.11.1</ip>
              <config>
                <ip>11.11.11.1</ip>
                <prefix-length>24</prefix-length>
              </config>
            </address>
          </addresses>
        </ipv4>
      </subinterface>
    </subinterfaces>
  </interface>
</interfaces>
```

OcNOS CLI Command

The below CLI command is used to configure an interface with both a primary and a secondary IP address.

```
interface xe10
 ip address 10.10.10.1/24
 ip address 11.11.11.1/24 secondary
 no shutdown
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload for configuring interface with both a primary and a secondary IP address.

```
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
    </config>
    <ipv4 xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-ip">
      <secondary-addresses>
        <ip-address>11.11.11.1/24</ip-address>
        <config>
          <ip-address>11.11.11.1/24</ip-address>
        </config>
      </secondary-addresses>
      <config>
        <primary-ip-addr>10.10.10.1/24</primary-ip-addr>
      </config>
    </ipv4>
  </interface>
</interfaces>
```

Validation with NetConf get

Here is a NetConf validation response providing details about the current state of the specified interface, as configured in the OpenConfig YANG model.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <tpid xmlns="http://openconfig.net/yang/vlan" xmlns:oc-vlan-
types="http://openconfig.net/yang/vlan-types">oc-vlan-types:TPID_0X8100</tpid>
      <type
xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <state>
      <name>xe10</name>
      <tpid xmlns="http://openconfig.net/yang/vlan-types">TPID_0X8100</
tpid>
      <logical>false</logical>
      <last-change>0</last-change>
      <oper-status>DOWN</oper-status>
      <admin-status>UP</admin-status>
      <ifindex>10010</ifindex>
      <counters>
        <last-clear>0</last-clear>
        <out-errors>0</out-errors>
        <out-discards>0</out-discards>
        <out-multicast-pkts>0</out-multicast-pkts>
        <out-broadcast-pkts>0</out-broadcast-pkts>
        <out-unicast-pkts>0</out-unicast-pkts>
        <out-pkts>0</out-pkts>
```

```

        <out-octets>0</out-octets>
        <in-fcs-errors>0</in-fcs-errors>
        <in-errors>0</in-errors>
        <in-discards>0</in-discards>
        <in-multicast-pkts>0</in-multicast-pkts>
        <in-broadcast-pkts>0</in-broadcast-pkts>
        <in-unicast-pkts>0</in-unicast-pkts>
        <in-pkts>0</in-pkts>
        <in-octets>0</in-octets>
    </counters>
    <type
type">ianaift:ethernetCsmacd</type>
    </state>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
        <state>
            <negotiated-port-speed
ethernet">oc-eth:SPEED_10GB</negotiated-port-speed>
            <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
            <hw-mac-address>b86a.97c3.6447</hw-mac-address>
        </state>
    </ethernet>
    <subinterfaces>
        <subinterface>
            <index>0</index>
            <ipv4 xmlns="http://openconfig.net/yang/interfaces/ip">
                <addresses>
                    <address>
                        <ip>10.10.10.1</ip>
                        <config>
                            <ip>10.10.10.1</ip>
                            <prefix-length>24</prefix-length>
                        </config>
                        <state>
                            <ip>10.10.10.1</ip>
                            <prefix-length>24</prefix-length>
                        </state>
                    </address>
                    <address>
                        <ip>11.11.11.1</ip>
                        <config>
                            <ip>11.11.11.1</ip>
                            <prefix-length>24</prefix-length>
                        </config>
                        <state>
                            <ip>11.11.11.1</ip>
                            <prefix-length>24</prefix-length>
                        </state>
                    </address>
                </addresses>
            </ipv4>
            <config>
                <index>0</index>
            </config>
        </subinterface>
    </subinterfaces>

```

```

    </interface>
  </interfaces>

```

Restrictions

The leaf mentioned below has been restricted to a maximum of 32 characters.

```
/interfaces/interface/name
```

All leaves of the below list, excluding the first entry, will be treated as secondary addresses.

```
/interfaces/interface/subinterfaces/subinterface/ipv4/addresses/address
```

Configure IPv6 Addresses

This XML configuration snippet is used to set the IPv6 addresses of an interface.

Release

This configuration was introduced in OcNOS version 4.2.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload for configuring IPv6 addresses on an interface.

```

<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xell</name>
    <config>
      <name>xell</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-type">ianaift:ethernetCsmacd</type>
    </config>
    <subinterfaces>
      <subinterface>
        <index>0</index>
        <ipv6 xmlns="http://openconfig.net/yang/interfaces/ip">
          <addresses>
            <address>
              <ip>ad0f::ac0f:ab0f</ip>
              <config>
                <ip>ad0f::ac0f:ab0f</ip>
                <prefix-length>64</prefix-length>
              </config>
            </address>
            <address>
              <ip>ae0f::ad0f:ac0f</ip>
              <config>
                <ip>ae0f::ad0f:ac0f</ip>
                <prefix-length>64</prefix-length>
              </config>
            </address>
            <address>
              <ip>f0ca:bebe::cafe</ip>
              <config>

```

```

        <ip>f0ca:bebe::cafe</ip>
        <prefix-length>64</prefix-length>
      </config>
    </address>
  </addresses>
</ipv6>
<config>
  <index>0</index>
</config>
</subinterface>
</subinterfaces>
</interface>
</interfaces>

```

OcNOS CLI Command

The below CLI command is used to configure an interface with multiple IPv6 addresses and enable the interface.

```

interface xel1
  ipv6 address ad0f::ac0f:ab0f/64
  ipv6 address ae0f::ad0f:ac0f/64
  ipv6 address f0ca:bebe::cafe/64
  no shutdown
!

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload for configuring an interface with multiple IPv6 addresses.

```

<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xel1</name>
    <config>
      <name>xel1</name>
    </config>
    <ipv6 xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-ip">
      <addresses>
        <ipv6-address>ad0f::ac0f:ab0f/64</ipv6-address>
        <config>
          <ipv6-address>ad0f::ac0f:ab0f/64</ipv6-address>
        </config>
      </addresses>
      <addresses>
        <ipv6-address>ae0f::ad0f:ac0f/64</ipv6-address>
        <config>
          <ipv6-address>ae0f::ad0f:ac0f/64</ipv6-address>
        </config>
      </addresses>
      <addresses>
        <ipv6-address>f0ca:bebe::cafe/64</ipv6-address>
        <config>
          <ipv6-address>f0ca:bebe::cafe/64</ipv6-address>
        </config>
      </addresses>
    </ipv6>
  </interface>

```

```
</interfaces>
```

Validation with NetConf get

The below NetConf validation response provides details about the current state of the specified interface configured with multiple IPv6 addresses using OpenConfig YANG data model elements.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <tpid xmlns="http://openconfig.net/yang/vlan" xmlns:oc-vlan-
types="http://openconfig.net/yang/vlan-types">oc-vlan-types:TPID_0X8100</tpid>
      <type
xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <state>
      <name>xe10</name>
      <tpid xmlns="http://openconfig.net/yang/vlan-types">TPID_0X8100</
tpid>
      <logical>false</logical>
      <last-change>0</last-change>
      <oper-status>DOWN</oper-status>
      <admin-status>UP</admin-status>
      <ifindex>10010</ifindex>
      <counters>
        <last-clear>0</last-clear>
        <out-errors>0</out-errors>
        <out-discards>0</out-discards>
        <out-multicast-pkts>0</out-multicast-pkts>
        <out-broadcast-pkts>0</out-broadcast-pkts>
        <out-unicast-pkts>0</out-unicast-pkts>
        <out-pkts>0</out-pkts>
        <out-octets>0</out-octets>
        <in-fcs-errors>0</in-fcs-errors>
        <in-errors>0</in-errors>
        <in-discards>0</in-discards>
        <in-multicast-pkts>0</in-multicast-pkts>
        <in-broadcast-pkts>0</in-broadcast-pkts>
        <in-unicast-pkts>0</in-unicast-pkts>
        <in-pkts>0</in-pkts>
        <in-octets>0</in-octets>
      </counters>
      <type
xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </state>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
      <config>
        <duplex-mode>FULL</duplex-mode>
      </config>
      <state>
        <duplex-mode>FULL</duplex-mode>
        <negotiated-port-speed
```

```
        xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_10GB</negotiated-port-speed>
        <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
        <hw-mac-address>b86a.97c3.6447</hw-mac-address>
    </state>
</ethernet>
<subinterfaces>
    <subinterface>
        <index>0</index>
        <config>
            <index>0</index>
        </config>
    </subinterface>
</subinterfaces>
</interface>
</interfaces>
```

Restrictions

The leaf mentioned below has been restricted to a maximum of 32 characters.

```
/interfaces/interface/name
```

Configure Duplex-mode

This XML configuration snippet is used to configure the duplex mode for an interface.

Release

This configuration was introduced in OcNOS version 4.2.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload to configure interface with the FULL duplex mode enabled.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <enabled>true</enabled>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
      <config>
        <duplex-mode>FULL</duplex-mode>
      </config>
    </ethernet>
  </interface>
</interfaces>
```

OcNOS CLI Command

The below CLI command is used to configure an interface with full duplex mode enabled and with no shutdown.

```
interface xe10
duplex full
no shutdown
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure interface with full duplex mode enabled and ensures that the interface is in the `enabled` state.

```
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <enabled>true</enabled>
    </config>
    <ethernet xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-ethernet">
      <config>
        <duplex-mode>full</duplex-mode>
      </config>
    </ethernet>
  </interface>
</interfaces>
```

Validation with NetConf get

Here is a NetConf validation response provides comprehensive information about the current state of an interface, including its operational and administrative status, traffic counters, and Ethernet configuration details.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <type
        xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-type">ianaift:ethernetCsmacd</type>
      </config>
    <state>
      <name>xe10</name>
      <logical>false</logical>
      <last-change>0</last-change>
      <oper-status>DOWN</oper-status>
      <admin-status>UP</admin-status>
      <ifindex>10010</ifindex>
      <counters>
        <last-clear>0</last-clear>
        <out-errors>0</out-errors>
        <out-discards>0</out-discards>
        <out-multicast-pkts>0</out-multicast-pkts>
        <out-broadcast-pkts>0</out-broadcast-pkts>
      </counters>
    </state>
  </interface>
</interfaces>
```

```

        <out-unicast-pkts>0</out-unicast-pkts>
        <out-pkts>0</out-pkts>
        <out-octets>0</out-octets>
        <in-fcs-errors>0</in-fcs-errors>
        <in-errors>0</in-errors>
        <in-discards>0</in-discards>
        <in-multicast-pkts>0</in-multicast-pkts>
        <in-broadcast-pkts>0</in-broadcast-pkts>
        <in-unicast-pkts>0</in-unicast-pkts>
        <in-pkts>0</in-pkts>
        <in-octets>0</in-octets>
    </counters>
    <type
      xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </state>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
      <config>
        <auto-negotiate>false</auto-negotiate>
        <port-speed
          xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_1GB</port-speed>
        </config>
        <state>
          <port-speed
            xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_1GB</port-speed>
            <negotiated-port-speed
              xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_1GB</negotiated-port-speed>
              <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
              <hw-mac-address>b86a.9729.abc5</hw-mac-address>
            </state>
          </ethernet>
        </subinterfaces>
        <subinterface>
          <index>0</index>
          <config>
            <index>0</index>
          </config>
        </subinterface>
      </subinterfaces>
    </interface>
  </interfaces>

```

Restrictions

The leaf mentioned below has been restricted to a maximum of 32 characters.

/interfaces/interface/name

Default

By default, the duplex mode for an interface is set to `full duplex`.

Configure Port-Speed

This XML configuration snippet is used to set the link speed of the interface.

Release

This configuration was introduced in OcNOS version 4.2.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload that specifies the configuration for an interface. It sets the interface's state to enabled (`true`) and defines it as an Ethernet interface (`ianaift:ethernetCsmacd`). Additionally, it specifies that auto-negotiation for link speed is disabled (`false`) and sets the port speed for a specified Ethernet interface.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xel0</name>
    <config>
      <name>xel0</name>
      <enabled>true</enabled>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
      <config>
        <auto-negotiate>false</auto-negotiate>
        <port-speed xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_1GB</port-speed>
      </config>
    </ethernet>
  </interface>
</interfaces>
```

OcNOS CLI Command

The below CLI command is used to configure an interface for a speed of 1 gigabit and enable it.

```
interface xel0
speed 1g
no shutdown
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload that enables an interface and sets its speed.

```
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xel0</name>
    <config>
      <name>xel0</name>
      <enabled>true</enabled>
    </config>
    <ethernet xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-
ethernet">
```

```

        <config>
          <port-speed>1g</port-speed>
        </config>
      </ethernet>
    </interface>
  </interfaces>

```

Validation with NetConf get

Here is a NetConf validation response to set the speed of an interface, providing details about the current state of the specified interface.

```

<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <tpid xmlns="http://openconfig.net/yang/vlan" xmlns:oc-vlan-
types="http://openconfig.net/yang/vlan-types">oc-vlan-types:TPID_0X8100</tpid>
      <type
xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <state>
      <name>xe10</name>
      <tpid xmlns="http://openconfig.net/yang/vlan-types">TPID_0X8100</
tpid>
      <logical>false</logical>
      <last-change>0</last-change>
      <oper-status>DOWN</oper-status>
      <admin-status>UP</admin-status>
      <ifindex>10010</ifindex>
      <counters>
        <last-clear>0</last-clear>
        <out-errors>0</out-errors>
        <out-discards>0</out-discards>
        <out-multicast-pkts>0</out-multicast-pkts>
        <out-broadcast-pkts>0</out-broadcast-pkts>
        <out-unicast-pkts>0</out-unicast-pkts>
        <out-pkts>0</out-pkts>
        <out-octets>0</out-octets>
        <in-fcs-errors>0</in-fcs-errors>
        <in-errors>0</in-errors>
        <in-discards>0</in-discards>
        <in-multicast-pkts>0</in-multicast-pkts>
        <in-broadcast-pkts>0</in-broadcast-pkts>
        <in-unicast-pkts>0</in-unicast-pkts>
        <in-pkts>0</in-pkts>
        <in-octets>0</in-octets>
      </counters>
      <type
xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </state>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
      <state>
        <negotiated-port-speed

```

```
        xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_10GB</negotiated-port-speed>
        <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
        <hw-mac-address>b86a.9729.abc5</hw-mac-address>
        </state>
    </ethernet>
    <subinterfaces>
        <subinterface>
            <index>0</index>
            <config>
                <index>0</index>
            </config>
        </subinterface>
    </subinterfaces>
</interface>
</interfaces>
```

Restrictions

The leaf mentioned below has been restricted to a maximum of 32 characters.

```
/interfaces/interface/name
```

This leaf can only be used when the auto-negotiate leaf (./auto-negotiate) is set to false.

```
/interfaces/interface/ethernet/config/port-speed
```

Configure Ethernet Type

This XML configuration snippet is used to specify the Ethernet type for an interface.

Release

This configuration was introduced in OcNOS version 5.0.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload that sets the Ethernet Type for an interface.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <enabled>true</enabled>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <tpid xmlns="http://openconfig.net/yang/vlan" xmlns:oc-vlan-types="http://
openconfig.net/yang/vlan-types">oc-vlan-types:TPID_0X88A8</tpid>
  </interface>
</interfaces>
```

OcNOS CLI Command

The below CLI command configures VLAN tagging with Ethernet Type on an interface and ensures that the interface is not in shutdown mode.

```
interface xe10
  switchport dot1q ethertype 0x88a8
  no shutdown
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload that enables an interface and configures it to use a dot1q Ethernet Type for VLAN tagging.

```
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <enabled>true</enabled>
    </config>
    <extended xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-extended">
      <config>
        <dot1q-ether-type>0x88a8</dot1q-ether-type>
      </config>
    </extended>
  </interface>
</interfaces>
```

Validation with NetConf get

Here is a NetConf validation response for the specified interface, providing comprehensive details about its current state, including operational and administrative statuses, traffic counters, Ethernet configuration, and VLAN tagging settings.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <tpid xmlns="http://openconfig.net/yang/vlan" xmlns:oc-vlan-
types="http://openconfig.net/yang/vlan-types">oc-vlan-types:TPID_0X8100</tpid>
      <type
xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <state>
      <name>xe10</name>
      <tpid xmlns="http://openconfig.net/yang/vlan-types">TPID_0X88a8</
tpid>
      <logical>false</logical>
      <last-change>0</last-change>
      <oper-status>DOWN</oper-status>
      <admin-status>UP</admin-status>
      <ifindex>10010</ifindex>
      <counters>
```

```

    <last-clear>0</last-clear>
    <out-errors>0</out-errors>
    <out-discards>0</out-discards>
    <out-multicast-pkts>0</out-multicast-pkts>
    <out-broadcast-pkts>0</out-broadcast-pkts>
    <out-unicast-pkts>0</out-unicast-pkts>
    <out-pkts>0</out-pkts>
    <out-octets>0</out-octets>
    <in-fcs-errors>0</in-fcs-errors>
    <in-errors>0</in-errors>
    <in-discards>0</in-discards>
    <in-multicast-pkts>0</in-multicast-pkts>
    <in-broadcast-pkts>0</in-broadcast-pkts>
    <in-unicast-pkts>0</in-unicast-pkts>
    <in-pkts>0</in-pkts>
    <in-octets>0</in-octets>
  </counters>
  <type
    xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
  </state>
  <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
    <state>
      <negotiated-port-speed
        xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_10GB</negotiated-port-speed>
      <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
      <hw-mac-address>b86a.9729.abc5</hw-mac-address>
    </state>
  </ethernet>
  <subinterfaces>
    <subinterface>
      <index>0</index>
      <config>
        <index>0</index>
      </config>
    </subinterface>
  </subinterfaces>
</interface>
</interfaces>

```

Restrictions

The leaf mentioned below has been restricted to a maximum of 32 characters.

/interfaces/interface/name

Configure Sub-interface with Primary and Secondary Addresses

This XML configuration snippet sets both primary and secondary IP addresses, each with its corresponding prefix length, for use by a sub-interface.

Release

This configuration was introduced in OcNOS version 4.2.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload for configuring sub-interface with two IPv4 addresses, each having the specified prefix length. This payload specifies the IP addresses to be used by the sub-interface with the specified index.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
    </config>
    <subinterfaces>
      <subinterface>
        <index>10</index>
        <config>
          <index>10</index>
        </config>
        <ipv4 xmlns="http://openconfig.net/yang/interfaces/ip">
          <addresses>
            <address>
              <ip>20.21.22.23</ip>
              <config>
                <ip>20.21.22.23</ip>
                <prefix-length>24</prefix-length>
              </config>
            </address>
            <address>
              <ip>24.25.26.27</ip>
              <config>
                <ip>24.25.26.27</ip>
                <prefix-length>24</prefix-length>
              </config>
            </address>
          </addresses>
        </ipv4>
      </subinterface>
    </subinterfaces>
  </interface>
</interfaces>
```

OcNOS CLI Command

The below CLI command is used to configure a sub-interface with both a primary and a secondary IPv4 address.

```
interface xe10.10
ip address 20.21.22.23/24
ip address 24.25.26.27/24 secondary
!
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload for configuring a sub-interface with both a primary and a secondary IPv4 address.

```
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe10.10</name>
    <config>
      <name>xe10.10</name>
    </config>
    <ipv4 xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-ip">
      <secondary-addresses>
        <ip-address>24.25.26.27/24</ip-address>
        <config>
          <ip-address>24.25.26.27/24</ip-address>
        </config>
      </secondary-addresses>
      <config>
        <primary-ip-addr>20.21.22.23/24</primary-ip-addr>
      </config>
    </ipv4>
  </interface>
</interfaces>
```

Validation with NetConf get

Here is a NetConf validation response for configuring a sub-interface with two IPv4 addresses, each with a specified prefix length. The response provides information about the current state of the specified sub-interface, including its operational status, interface index, and traffic counters.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
    </config>
    <subinterfaces>
      <subinterface>
        <index>10</index>
        <config>
          <index>10</index>
        </config>
        <state>
          <name>xe10.10</name>
          <logical>true</logical>
          <oper-status>DOWN</oper-status>
          <ifindex>20500490</ifindex>
          <counters>
            <last-clear>0</last-clear>
            <out-pkts>0</out-pkts>
            <out-octets>0</out-octets>
            <in-pkts>0</in-pkts>
            <in-octets>0</in-octets>
          </counters>
        </state>
      </subinterface>
    </subinterfaces>
  </interface>
</interfaces>
```

```

<ipv4 xmlns="http://openconfig.net/yang/interfaces/ip">
  <addresses>
    <address>
      <ip>20.21.22.23</ip>
      <config>
        <ip>20.21.22.23</ip>
        <prefix-length>24</prefix-length>
      </config>
      <state>
        <ip>20.21.22.23</ip>
        <prefix-length>24</prefix-length>
      </state>
    </address>
    <address>
      <ip>24.25.26.27</ip>
      <config>
        <ip>24.25.26.27</ip>
        <prefix-length>24</prefix-length>
      </config>This configuration was introduced
      <state>
        <ip>24.25.26.27</ip>
        <prefix-length>24</prefix-length>
      </state>
    </address>
  </addresses>
</ipv4>
</subinterface>
</subinterfaces>
</interface>
</interfaces>

```

Restrictions

The leaf mentioned below has been restricted to a maximum of 32 characters.

```
/interfaces/interface/name
```

The first entry on the below list will be used as the primary address, as OpenConfig does not have this concept.

```
/interfaces/interface/subinterfaces/subinterface/ipv4/addresses/address
```

When using OpenConfig translation, use the sub-interface name in the format <ifname>.<id>, as OpenConfig does not support the <ifname>.<id>.<id> format, even though it is allowed by OcNOS CLI.

```
/interfaces/interface/subinterfaces/subinterface/index
```

LACP OpenConfig Translation

Create Static LAG Interface

This XML configuration snippet is used to create a static Link Aggregation Group (LAG) interface with a specified name and configure its settings for a network device.

Release

This configuration was introduced in OcNOS version 5.0.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload that configures two Ethernet interfaces to be part of a LAG. The LAG uses the Link Aggregation Control Protocol (LACP) in ACTIVE mode, and it requires a minimum of two member links to be up for the LAG to be operational. Additionally, set the system priority.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>sa10</name>
    <config>
      <name>sa10</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ieee8023adLag</type>
    </config>
    <aggregation xmlns="http://openconfig.net/yang/interfaces/aggregate">
      <config>
        <min-links>2</min-links>
        <lag-type>STATIC</lag-type>
      </config>
    </aggregation>
  </interface>
  <interface>
    <name>xe6</name>
    <config>
      <name>xe6</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
      <config>
        <aggregate-id xmlns="http://openconfig.net/yang/interfaces/
aggregate">sa10</aggregate-id>
        <lacp-mode xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-if-
deviations">ACTIVE</lacp-mode>
      </config>
    </ethernet>
  </interface>
  <interface>
    <name>xe7</name>
```

```

    <config>
      <name>xe7</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
      <config>
        <aggregate-id xmlns="http://openconfig.net/yang/interfaces/
aggregate">sa10</aggregate-id>
        <lacp-mode xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-if-
deviations">ACTIVE</lacp-mode>
      </config>
    </ethernet>
  </interface>
</interfaces>
<lacp xmlns="http://openconfig.net/yang/lacp">
  <config>
    <system-priority>2</system-priority>
  </config>
</lacp>

```

OcNOS CLI Command

The below CLI commands are used to configure a static LAG interface with a system priority and a minimum required member link count. Ethernet interfaces are also assigned to the static LAG group with the specified identifier.

```

lacp system-priority 2
!
interface sa10
  port-channel min-links 2
!
interface xe6
  static-channel-group 10
!
interface xe7
  static-channel-group 10
!

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload that configures two Ethernet interfaces to be part of a static LAG with the specified identifier. The LAG requires a minimum of two member links to be operational and uses the LACP mode ACTIVE. Additionally, it sets the system priority for LACP.

This payload includes configurations for both OpenConfig and OcNOS YANG models to ensure compatibility between the two.

```

<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>sa10</name>
    <config>
      <name>sa10</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ieee8023adLag</type>
    </config>
    <aggregation xmlns="http://openconfig.net/yang/interfaces/aggregate">
      <config>

```

```
        <min-links>2</min-links>
        <lag-type>STATIC</lag-type>
    </config>
</aggregation>
</interface>
<interface>
    <name>xe6</name>
    <config>
        <name>xe6</name>
        <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
        <config>
            <aggregate-id xmlns="http://openconfig.net/yang/interfaces/
aggregate">sa10</aggregate-id>
            <lacp-mode xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-
if-deviations">ACTIVE</lacp-mode>
        </config>
    </ethernet>
</interface>
<interface>
    <name>xe7</name>
    <config>
        <name>xe7</name>
        <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
        <config>
            <aggregate-id xmlns="http://openconfig.net/yang/interfaces/
aggregate">sa10</aggregate-id>
            <lacp-mode xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-
if-deviations">ACTIVE</lacp-mode>
        </config>
    </ethernet>
</interface>
</interfaces>
<lacp xmlns="http://openconfig.net/yang/lacp">
    <config>
        <system-priority>2</system-priority>
    </config>
</lacp>
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
    <interface>
        <name>sa10</name>
        <config>
            <name>sa10</name>
        </config>
        <aggregator xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-
aggregate">
            <config>
                <min-links>2</min-links>
            </config>
        </aggregator>
    </interface>
    <interface>
        <name>xe6</name>
```

```

    <config>
      <name>xe6</name>
    </config>
    <ethernet xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-
ethernet">
      <config />
    </ethernet>
    <member-aggregation xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-
if-aggregate">
      <config>
        <agg-type>static</agg-type>
        <aggregate-id>10</aggregate-id>
        <lacp-mode>active</lacp-mode>
      </config>
    </member-aggregation>
  </interface>
  <interface>
    <name>xe7</name>
    <config>
      <name>xe7</name>
    </config>
    <ethernet xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-
ethernet">
      <config />
    </ethernet>
    <member-aggregation xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-
if-aggregate">
      <config>
        <agg-type>static</agg-type>
        <aggregate-id>10</aggregate-id>
        <lacp-mode>active</lacp-mode>
      </config>
    </member-aggregation>
  </interface>
</interfaces>
<lacp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-lacp">
  <global>
    <config>
      <system-priority>2</system-priority>
    </config>
  </global>
</lacp>

```

Validation with NetConf get

Here is a NetConf validation response defines three interfaces, including a `static` LAG type that requires a minimum of two member links and has an operational status of `UP`. Both of the Ethernet interfaces are part of this LAG, and they also have `UP` operational status. The LAG uses LACP in `ACTIVE` mode, and it sets the system priority for LACP.

```

<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>sa10</name>
    <config>
      <name>sa10</name>
      <type
        xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ieee8023adLag</type>

```

```

</config>
<state>
  <name>sa10</name>
  <logical>false</logical>
  <last-change>35600</last-change>
  <oper-status>UP</oper-status>
  <admin-status>UP</admin-status>
  <ifindex>200010</ifindex>
  <counters>
    <last-clear>0</last-clear>
    <out-errors>0</out-errors>
    <out-discards>0</out-discards>
    <out-multicast-pkts>7</out-multicast-pkts>
    <out-broadcast-pkts>0</out-broadcast-pkts>
    <out-unicast-pkts>0</out-unicast-pkts>
    <out-pkts>7</out-pkts>
    <out-octets>774</out-octets>
    <in-fcs-errors>0</in-fcs-errors>
    <in-errors>0</in-errors>
    <in-discards>0</in-discards>
    <in-multicast-pkts>7</in-multicast-pkts>
    <in-broadcast-pkts>0</in-broadcast-pkts>
    <in-unicast-pkts>0</in-unicast-pkts>
    <in-pkts>3852605</in-pkts>
    <in-octets>130989214</in-octets>
  </counters>
  <type>
    xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ieee8023adLag</type>
  </state>
  <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
    <state>
      <negotiated-port-speed>
        xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_UNKNOWN</negotiated-port-speed>
      <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
      <hw-mac-address>b86a.9729.abf2</hw-mac-address>
    </state>
  </ethernet>
  <subinterfaces>
    <subinterface>
      <index>0</index>
      <config>
        <index>0</index>
      </config>
    </subinterface>
  </subinterfaces>
  <aggregation xmlns="http://openconfig.net/yang/interfaces/aggregate">
    <config>
      <min-links>2</min-links>
      <lag-type>STATIC</lag-type>
    </config>
    <state>
      <min-links>2</min-links>
      <lag-type>STATIC</lag-type>
    </state>
  </aggregation>

```

```

    </interface>
  </interfaces>
  <interfaces xmlns="http://openconfig.net/yang/interfaces">
    <interface>
      <name>xe6</name>
      <config>
        <name>xe6</name>
        <type
type">ianaift:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
        </config>
        <state>
          <name>xe6</name>
          <logical>false</logical>
          <last-change>35600</last-change>
          <oper-status>UP</oper-status>
          <admin-status>UP</admin-status>
          <ifindex>10006</ifindex>
          <counters>
            <last-clear>0</last-clear>
            <out-errors>0</out-errors>
            <out-discards>0</out-discards>
            <out-multicast-pkts>0</out-multicast-pkts>
            <out-broadcast-pkts>0</out-broadcast-pkts>
            <out-unicast-pkts>0</out-unicast-pkts>
            <out-pkts>0</out-pkts>
            <out-octets>0</out-octets>
            <in-fcs-errors>0</in-fcs-errors>
            <in-errors>0</in-errors>
            <in-discards>0</in-discards>
            <in-multicast-pkts>7</in-multicast-pkts>
            <in-broadcast-pkts>0</in-broadcast-pkts>
            <in-unicast-pkts>0</in-unicast-pkts>
            <in-pkts>7</in-pkts>
            <in-octets>814</in-octets>
          </counters>
          <type
type">ianaift:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
        </state>
        <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
          <state>
            <negotiated-port-speed
ethernet">oc-eth:SPEED_10GB</negotiated-port-speed>
            <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
            <hw-mac-address>b86a.9729.abcl</hw-mac-address>
            <aggregate-id xmlns="http://openconfig.net/yang/interfaces/
aggregate">sa10</aggregate-id>
          </state>
          <config>
            <aggregate-id xmlns="http://openconfig.net/yang/interfaces/
aggregate">sa10</aggregate-id>
            <lacp-mode xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-if-
deviations">ACTIVE</lacp-mode>
          </config>
        </ethernet>
      </subinterfaces>

```



```

    <subinterface>
      <index>0</index>
      <config>
        <index>0</index>
      </config>
    </subinterface>
  </subinterfaces>
</interface>
</interfaces>
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe7</name>
    <config>
      <name>xe7</name>
      <type
type">ianaift:ethernetCsmacd</type>
        </config>
        <state>
          <name>xe7</name>
          <logical>false</logical>
          <last-change>15300</last-change>
          <oper-status>UP</oper-status>
          <admin-status>UP</admin-status>
          <ifindex>10007</ifindex>
          <counters>
            <last-clear>0</last-clear>
            <out-errors>0</out-errors>
            <out-discards>0</out-discards>
            <out-multicast-pkts>7</out-multicast-pkts>
            <out-broadcast-pkts>0</out-broadcast-pkts>
            <out-unicast-pkts>0</out-unicast-pkts>
            <out-pkts>7</out-pkts>
            <out-octets>774</out-octets>
            <in-fcs-errors>0</in-fcs-errors>
            <in-errors>0</in-errors>
            <in-discards>0</in-discards>
            <in-multicast-pkts>0</in-multicast-pkts>
            <in-broadcast-pkts>0</in-broadcast-pkts>
            <in-unicast-pkts>0</in-unicast-pkts>
            <in-pkts>4193454</in-pkts>
            <in-octets>142577504</in-octets>
          </counters>
          <type
type">ianaift:ethernetCsmacd</type>
            </state>
          <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
            <state>
              <negotiated-port-speed
ethernet">oc-eth:SPEED_1GB</negotiated-port-speed>
                <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
                <hw-mac-address>b86a.9729.abc2</hw-mac-address>
                <aggregate-id xmlns="http://openconfig.net/yang/interfaces/
aggregate">sa10</aggregate-id>
              </state>
            </ethernet>
          </state>
        </config>
      </interface>
    </interfaces>
  </config>
</interfaces>

```

```

    <config>
      <aggregate-id xmlns="http://openconfig.net/yang/interfaces/
aggregate">sa10</aggregate-id>
      <lacp-mode xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-if-
deviations">ACTIVE</lacp-mode>
    </config>
  </ethernet>
  <subinterfaces>
    <subinterface>
      <index>0</index>
      <config>
        <index>0</index>
      </config>
    </subinterface>
  </subinterfaces>
</interface>
</interfaces>
<lacp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-lacp">
  <global>
    <config>
      <system-priority>2</system-priority>
    </config>
    <state>
      <system-priority>2</system-priority>
      <system-id>b8-6a-97-82-11-ba</system-id>
    </state>
  </global>
</lacp>

```

Restrictions

The interface name for a static LAG interface should begin with the text `sa`, followed by a number, such as `sa3`.

`/interfaces/interface/name`

The data type of the below leaf has been modified to `uint8`.

`/interfaces/interface/aggregation/config/min-links`

The below leaf was not in a supported state.

`/lacp/interfaces/interface/config/lacp-mode`

Create Dynamic LAG Interface

This XML configuration snippet is used to create a dynamic Link Aggregation Group (LAG) interface with a specified name and configure its settings for a network device.

Release

This configuration was introduced in OcNOS version 5.0.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload that configures an Ethernet interfaces to be a part of a LAG with a specified identifier. The LAG uses the LACP in `ACTIVE` mode, and it requires a minimum of two member links to be operational. Additionally, it sets the system priority for LACP.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">/oc-
if:interfaces/oc-if:interface/oc-if:config/oc-if:name
      <config>
        <lacp-mode xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-
if-deviations">ACTIVE</lacp-mode>
        <aggregate-id xmlns="http://openconfig.net/yang/interfaces/
aggregate">po2</aggregate-id>
      </config>
    </ethernet>
  </interface>
  <interface>
    <name>po2</name>
    <config>
      <name>po2</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ieee8023adLag</type>
    </config>
    <aggregation xmlns="http://openconfig.net/yang/interfaces/aggregate">
      <config>
        <min-links>2</min-links>
        <lag-type>LACP</lag-type>
      </config>
    </aggregation>
  </interface>
</interfaces>
<lacp xmlns="http://openconfig.net/yang/lacp">
  <config>
    <system-priority>2</system-priority>
  </config>
  <interfaces>
    <interface>
      <name>xe10</name>
    </interface>
  </interfaces>
</lacp>
```

OcNOS CLI Command

The below CLI commands are used to configure a dynamic LAG interface with a system priority and a minimum required member link count. Ethernet interface is also assigned to the dynamic LAG group with the specified identifier and sets the LACP mode as `ACTIVE`.

```
lacp system-priority 2
```

```

!
interface po2
  port-channel min-links 2
!
interface xe10
  channel-group 2 mode active
!

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload that configures a dynamic LAG interface with a minimum required member link count and assigns an Ethernet interface to the LAG group with LACP mode `ACTIVE`. Additionally, it sets the system priority for LACP.

```

<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
    </config>
    <member-aggregation xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-aggregate">
      <config>
        <lacp-mode>active</lacp-mode>
        <aggregate-id>2</aggregate-id>
        <agg-type>lacp</agg-type>
      </config>
    </member-aggregation>
  </interface>
  <interface>
    <name>po2</name>
    <config>
      <name>po2</name>
    </config>
    <aggregator xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-aggregate">
      <config>
        <min-links>2</min-links>
      </config>
    </aggregator>
  </interface>
</interfaces>
<lacp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-lacp">
  <global>
    <config>
      <system-priority>2</system-priority>
    </config>
  </global>
</lacp>

```

Validation with NetConf get

Here is a NetConf validation response provides detailed information about the dynamic LAG interface status and configuration, which includes dynamic link aggregation using LACP, minimum member link requirements, operational status, and system priority settings.

```

    <rpc-reply xmlns="urn:ietf:params:xml:ns:NETCONF:base:1.0">
    <data>
      <interfaces xmlns="http://openconfig.net/yang/interfaces">
        <interface>
          <name>po2</name>
          <config>
            <name>po2</name>
            <type
type">ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ieee8023adLag</type>
            </config>
            <state>
              <name>po2</name>
              <logical>false</logical>
              <last-change>0</last-change>
              <oper-status>DOWN</oper-status>
              <admin-status>UP</admin-status>
              <ifindex>100002</ifindex>
              <counters>
                <last-clear>0</last-clear>
                <out-errors>0</out-errors>
                <out-discards>0</out-discards>
                <out-multicast-pkts>37</out-multicast-pkts>
                <out-broadcast-pkts>0</out-broadcast-pkts>
                <out-unicast-pkts>0</out-unicast-pkts>
                <out-pkts>37</out-pkts>
                <out-octets>4736</out-octets>
                <in-fcs-errors>0</in-fcs-errors>
                <in-errors>0</in-errors>
                <in-discards>0</in-discards>
                <in-multicast-pkts>0</in-multicast-pkts>
                <in-broadcast-pkts>0</in-broadcast-pkts>
                <in-unicast-pkts>0</in-unicast-pkts>
                <in-pkts>0</in-pkts>
                <in-octets>0</in-octets>
              </counters>
              <type
type">ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ieee8023adLag</type>
              </state>
            <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
              <state>
                <negotiated-port-speed
ethernet">oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_UNKNOWN</negotiated-port-speed>
                <negotiated-duplex-mode>HALF</negotiated-duplex-mode>
                <hw-mac-address>b86a.9729.abf2</hw-mac-address>
              </state>
            </ethernet>
          <subinterfaces>
            <subinterface>
              <index>0</index>
              <config>
                <index>0</index>
              </config>
            </subinterface>
          </subinterfaces>

```

```
<aggregation xmlns="http://openconfig.net/yang/interfaces/aggregate">
  <config>
    <min-links>2</min-links>
    <lag-type>LACP</lag-type>
  </config>
  <state>
    <min-links>2</min-links>
    <lag-type>LACP</lag-type>
  </state>
</aggregation>
</interface>
</interfaces>
</data>
</rpc-reply>
```

Restrictions

The interface name for a dynamic LAG interface should begin with the text `po`, followed by a number, such as `po2`.

`/interfaces/interface/name`

The data type of the below leaf has been modified to `uint8`.

`/interfaces/interface/aggregation/config/min-links`

The below leaf was not in a supported state.

`/lacp/interfaces/interface/config/lacp-mode`

Tunnel Interfaces OpenConfig Translation

Create Tunnel Interface

This XML configuration snippet is used to specify the configuration for an OpenConfig interface with a tunnel type, source and destination IP addresses.

Release

This configuration was introduced in OcNOS version 4.2.

OpenConfig NetConf Payload

Here is the sample OpenConfig NetConf Payload configures an OpenConfig interface as a tunnel type with specific source and destination IP addresses and Time to Live (TTL) settings.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>Tunnel30</name>
    <config>
      <name>Tunnel30</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:tunnel</type>
    </config>
    <tunnel xmlns="http://openconfig.net/yang/interfaces/tunnel">
      <ipv4>
        <addresses>
          <address>
            <ip>40.1.1.1</ip>
            <config>
              <ip>40.1.1.1</ip>
              <prefix-length>24</prefix-length>
            </config>
          </address>
        </addresses>
      </ipv4>
      <config>
        <src>20.2.2.1</src>
        <dst>20.2.2.2</dst>
        <ttl>250</ttl>
      </config>
    </tunnel>
  </interface>
</interfaces>
```

OcNOS CLI Command

The below CLI command is used to configure an interface with an IP address, a tunnel source and destination addresses, and a tunnel TTL value.

```

interface Tunnel30
ip address 40.1.1.1/24
tunnel source 20.2.2.1
tunnel destination 20.2.2.2
tunnel ttl 250

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload that configures a Tunnel Interface with the specified source and destination addresses, and a TTL value. It also includes a secondary IPv4 address for the interface.

```

<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>Tunnel30</name>
    <config>
      <name>Tunnel30</name>
    </config>
    <tunnel xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-
extended">
      <config>
        <src>20.2.2.1</src>
        <dst>20.2.2.2</dst>
        <ttl>250</ttl>
      </config>
    </tunnel>
    <ipv4 xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-ip">
      <secondary-addresses>
        <ip-address>40.1.1.1/24</ip-address>
        <config>
          <ip-address>40.1.1.1/24</ip-address>
        </config>
      </secondary-addresses>
    </ipv4>
  </interface>
</interfaces>

```

Validation with NetConf get

Here is a NetConf validation response provides an information about the configuration and status of the Tunnel Interface.

```

<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>Tunnel30</name>
    <config>
      <name>Tunnel30</name>
      <type
type">ianaift:tunnel</type>
        xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
        </config>
      <state>
        <name>Tunnel30</name>
        <logical>false</logical>
        <last-change>0</last-change>
        <oper-status>DOWN</oper-status>
        <admin-status>UP</admin-status>
        <ifindex>0</ifindex>
      </state>
    </interface>
  </interfaces>

```



```

    <type
      xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:tunnel</type>
    </state>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
      <state>
        <negotiated-port-speed
          xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_UNKNOWN</negotiated-port-speed>
        <negotiated-duplex-mode>HALF</negotiated-duplex-mode>
        <hw-mac-address>0000.0000.0000</hw-mac-address>
      </state>
    </ethernet>
    <tunnel xmlns="http://openconfig.net/yang/interfaces/tunnel">
      <ipv4>
        <addresses>
          <address>
            <ip>40.1.1.1</ip>
            <config>
              <ip>40.1.1.1</ip>
              <prefix-length>24</prefix-length>
            </config>
            <state>
              <ip>40.1.1.1</ip>
              <prefix-length>24</prefix-length>
            </state>
          </address>
        </addresses>
      </ipv4>
      <config>
        <src>20.2.2.1</src>
        <dst>20.2.2.2</dst>
        <ttl>250</ttl>
      </config>
      <state>
        <src>20.2.2.1</src>
        <dst>20.2.2.2</dst>
        <ttl>250</ttl>
      </state>
    </tunnel>
  </interface>
</interfaces>

```

Restrictions

Tunnel interfaces must begin with `Tunnel` followed by a numerical value, such as `Tunnel30`.

`/interfaces/interface/name`

The tunnel configuration parameters `src` and `dst` do not have support for IPv6.

`/interfaces/interface/tunnel/config/dst`
`/interfaces/interface/tunnel/config/src`

The data type of the `ttl` leaf has been updated from `uint8` to `uint16`.

`/interfaces/interface/tunnel/config/ttl`

The primary IP address is determined by the first configured address, and it is not possible to delete the primary address without removing the other addresses.

/interfaces/interface/tunnel/ipv4/addresses/address/config/ip

Static Route OpenConfig Translation

Create a static route

This XML configuration snippet is used to specify the destination prefix and mask for the network and create a gateway statically.

Release

This configuration was introduced in OcNOS version 4.2.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to specify the destination prefix and mask for the network and create a gateway statically.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>TEST_A9</name>
    <config>
      <name>TEST_A9</name>
      <type xmlns:oc-ni-types="http://openconfig.net/yang/network-
instance-types">oc-ni-types:L3VRF</type>
    </config>
    <protocols>
      <protocol>
        <identifier xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
        <name>DIRECTLY_CONNECTED</name>
        <config>
          <identifier xmlns:oc-pol-types="http://openconfig.net/
yang/policy-types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
          <name>DIRECTLY_CONNECTED</name>
          <enabled>true</enabled>
        </config>
      </protocol>
      <protocol>
        <identifier xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:STATIC</identifier>
        <name>static-routes</name>
        <config>
          <identifier xmlns:oc-pol-types="http://openconfig.net/
yang/policy-types">oc-pol-types:STATIC</identifier>
          <name>static-routes</name>
        </config>
        <static-routes>
          <static>
            <prefix>192.168.0.0/24</prefix>
            <next-hops>
              <next-hop>
```

```

        <index>172.17.30.2</index>
        <interface-ref>
            <config>
                <interface>xe2</interface>
            </config>
        </interface-ref>
        <config>
            <metric>10</metric>
            <index>172.17.30.2</index>
            <next-hop>172.17.30.2</next-hop>
        </config>
    </next-hop>
</next-hops>
<config>
    <prefix>192.168.0.0/24</prefix>
</config>
</static>
</static-routes>
</protocol>
</protocols>
<tables>
    <table>
        <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">oc-types:IPv4</address-family>
        <config>
            <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
            <address-family xmlns:oc-types="http://openconfig.net/
yang/openconfig-types">oc-types:IPv4</address-family>
            </config>
        </table>
    </table>
    <table>
        <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">oc-types:IPv6</address-family>
        <config>
            <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
            <address-family xmlns:oc-types="http://openconfig.net/
yang/openconfig-types">oc-types:IPv6</address-family>
            </config>
        </table>
    </table>
    <table>
        <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:STATIC</protocol>
        <address-family xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">oc-types:IPv4</address-family>
        <config>
            <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:STATIC</protocol>
            <address-family xmlns:oc-types="http://openconfig.net/
yang/openconfig-types">oc-types:IPv4</address-family>
            </config>
        </table>
    </table>
</tables>
</interfaces>

```

```

    <interface>
      <id>xe2</id>
      <config>
        <interface>xe2</interface>
        <id>xe2</id>
      </config>
    </interface>
  </interfaces>
</network-instance>
</network-instances>

```

OcNOS CLI Command

This CLI command is used to specify the destination prefix and mask for the network and create a gateway statically.

```

interface xe2
  ip vrf forwarding TEST_A9
!
ip route vrf TEST_A9 192.168.0.0/24 172.17.30.2 xe2 10

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to specify the destination prefix and mask for the network and create a gateway statically.

```

<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-network-
instance">
  <network-instance>
    <instance-name>TEST_A9</instance-name>
    <instance-type>vrf</instance-type>
    <config>
      <instance-name>TEST_A9</instance-name>
      <instance-type>vrf</instance-type>
    </config>
    <vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vrf">
      <config>
        <vrf-name>TEST_A9</vrf-name>
      </config>
      <static-routes xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-
rib-vrf">
        <ipv4>
          <route>
            <destination-prefix>192.168.0.0/24</destination-
prefix>
            <gateway-address>172.17.30.2</gateway-address>
            <gateway-interface-route>
              <interface-name>xe2</interface-name>
              <config>
                <interface-name>xe2</interface-name>
                <distance>10</distance>
              </config>
            </gateway-interface-route>
            <config>
              <destination-prefix>192.168.0.0/24</destination-
prefix>
              <gateway-address>172.17.30.2</gateway-address>
            </config>

```

```

        </route>
      </ipv4>
    </static-routes>
  </vrf>
</network-instance>
</network-instances>
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe2</name>
    <config>
      <name>xe2</name>
      <vrf-name>TEST_A9</vrf-name>
    </config>
  </interface>
</interfaces>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about destination prefix and mask for the network and create a gateway statically.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>TEST_A9</name>
    <config>
      <name>TEST_A9</name>
      <type
types">oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
      </config>
      <state>
        <name>TEST_A9</name>
        <type
types">oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
        </state>
        <protocols>
          <protocol>
            <identifier
types">oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <config>
              <identifier
types">oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
              <name>DIRECTLY_CONNECTED</name>
              <enabled>true</enabled>
            </config>
          </protocol>
          <protocol>
            <identifier
types">oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:STATIC</identifier>
            <name>static-routes</name>
            <config>
              <identifier

```

```

        xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:STATIC</identifier>
        <name>static-routes</name>
    </config>
    <static-routes>
        <static>
            <prefix>192.168.0.0/24</prefix>
            <next-hops>
                <next-hop>
                    <index>172.17.30.2</index>
                    <interface-ref>
                        <config>
                            <interface>xe2</interface>
                        </config>
                        <state>
                            <interface>xe2</interface>
                        </state>
                    </interface-ref>
                    <config>
                        <metric>10</metric>
                        <index>172.17.30.2</index>
                        <next-hop>172.17.30.2</next-hop>
                    </config>
                    <state>
                        <metric>10</metric>
                        <index>172.17.30.2</index>
                        <next-hop>172.17.30.2</next-hop>
                    </state>
                </next-hop>
            </next-hops>
            <config>
                <prefix>192.168.0.0/24</prefix>
            </config>
            <state>
                <prefix>192.168.0.0/24</prefix>
            </state>
        </static>
    </static-routes>
</protocol>
</protocols>
<tables>
    <table>
        <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
            <address-family
                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPV4</address-family>
                <config>
                    <protocol
                        xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
                        <address-family
                            xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">oc-types:IPV4</address-family>
                            <config>
                                <table>
                                    <table>

```

```

        <protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPV6</address-family>
        <config>
          <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
            <address-family
              xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">oc-types:IPV6</address-family>
            </config>
          </table>
        </table>
        <table>
          <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:STATIC</protocol>
            <address-family
              xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPV4</address-family>
            <config>
              <protocol
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:STATIC</protocol>
                <address-family
                  xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">oc-types:IPV4</address-family>
                </config>
              </table>
            </tables>
          </interfaces>
          <interface>
            <id>lo.TEST_A9</id>
            <config>
              <interface>lo.TEST_A9</interface>
              <id>lo.TEST_A9</id>
            </config>
          </interface>
          <interface>
            <id>xe2</id>
            <config>
              <interface>xe2</interface>
              <id>xe2</id>
            </config>
          </interface>
        </interfaces>
      </network-instance>
    </network-instances>

```

Restrictions

/network-instances/network-instance/protocols/protocol/static-routes/static/next-hops/
next-hop

It is necessary to have at least one entry in this list of next hops

/network-instances/network-instance/protocols/protocol/static-routes/static/next-hops/next-hop/index

Whenever `config/next-hop` leaf is configured, the index must have the same value as the next-hop. If not, the index must match the interface name built from `interface-ref/config/interface` and `interface-ref/config/subinterface`. For example `xe1`, `"xe2.100"` and so on.

Create a Static Route with Load Balancing

This XML configuration snippet is used to create two paths to a specified destination prefix and mask for the network and a gateway working in load balancing scenario. With these two links, it is possible to guarantee the service availability. All traffic should be routed throughout both links at the same time and if any of them has a failure, all traffic must be routed through the available link.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create a static route with load balancing.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>TEST_A9</name>
    <config>
      <name>TEST_A9</name>
      <type xmlns:oc-ni-types="http://openconfig.net/yang/network-
instance-types">oc-ni-types:L3VRF</type>
    </config>
    <protocols>
      <protocol>
        <identifier xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
        <name>DIRECTLY_CONNECTED</name>
        <config>
          <identifier xmlns:oc-pol-types="http://openconfig.net/
yang/policy-types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
          <name>DIRECTLY_CONNECTED</name>
          <enabled>true</enabled>
        </config>
      </protocol>
      <protocol>
        <identifier xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:STATIC</identifier>
        <name>static-routes</name>
        <config>
          <identifier xmlns:oc-pol-types="http://openconfig.net/
yang/policy-types">oc-pol-types:STATIC</identifier>
          <name>static-routes</name>
        </config>
        <static-routes>
          <static>
            <prefix>192.168.0.0/24</prefix>
            <next-hops>
```

```

        <next-hop>
          <index>172.17.30.2</index>
          <interface-ref>
            <config>
              <interface>xe2</interface>
            </config>
          </interface-ref>
          <config>
            <metric>10</metric>
            <index>172.17.30.2</index>
            <next-hop>172.17.30.2</next-hop>
          </config>
        </next-hop>
      </next-hop>
    </next-hops>
    <config>
      <prefix>192.168.0.0/24</prefix>
    </config>
  </static>
</static-routes>
</protocol>
</protocols>
<tables>
  <table>
    <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
    <address-family xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">oc-types:IPv4</address-family>
    <config>
      <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
      <address-family xmlns:oc-types="http://openconfig.net/
yang/openconfig-types">oc-types:IPv4</address-family>
    </config>
  </table>
  <table>
    <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
    <address-family xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">oc-types:IPv6</address-family>
    <config>
      <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
      <address-family xmlns:oc-types="http://openconfig.net/
yang/openconfig-types">oc-types:IPv6</address-family>
    </config>
  </table>

```

```

    </table>
    <table>
      <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:STATIC</protocol>
      <address-family xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">oc-types:IPV4</address-family>
      <config>
        <protocol xmlns:oc-pol-types="http://openconfig.net/yang/
policy-types">oc-pol-types:STATIC</protocol>
        <address-family xmlns:oc-types="http://openconfig.net/
yang/openconfig-types">oc-types:IPV4</address-family>
      </config>
    </table>
  </tables>
  <interfaces>
    <interface>
      <id>xe1</id>
      <config>
        <interface>xe1</interface>
        <id>xe1</id>
      </config>
    </interface>
    <interface>
      <id>xe2</id>
      <config>
        <interface>xe2</interface>
        <id>xe2</id>
      </config>
    </interface>
  </interfaces>
</network-instance>
</network-instances>

```

OcNOS CLI Command

This CLI command is used to create a static route with load balancing.

```

interface xe1
  ip vrf forwarding TEST_A9
!
interface xe2
  ip vrf forwarding TEST_A9
!
ip route vrf TEST_A9 192.168.0.0/24 172.17.30.2 xe2 10
ip route vrf TEST_A9 192.168.0.0/24 172.17.31.2 xe1 10

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to create a static route with load balancing.

```

<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-network-
instance">
  <network-instance>
    <instance-name>TEST_A9</instance-name>
    <instance-type>vrf</instance-type>
    <config>
      <instance-name>TEST_A9</instance-name>

```

```

        <instance-type>vrf</instance-type>
    </config>
    <vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vrf">
        <config>
            <vrf-name>TEST_A9</vrf-name>
        </config>
        <static-routes xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-
rib-vrf">
            <ipv4>
                <route>
                    <destination-prefix>192.168.0.0/24</destination-
prefix>
                    <gateway-address>172.17.30.2</gateway-address>
                    <gateway-interface-route>
                        <interface-name>xe2</interface-name>
                        <config>
                            <interface-name>xe2</interface-name>
                            <distance>10</distance>
                        </config>
                    </gateway-interface-route>
                    <config>
                        <destination-prefix>192.168.0.0/24</destination-
prefix>
                        <gateway-address>172.17.30.2</gateway-address>
                    </config>
                </route>
                <route>
                    <destination-prefix>192.168.0.0/24</destination-
prefix>
                    <gateway-address>172.17.31.2</gateway-address>
                    <gateway-interface-route>
                        <interface-name>xe1</interface-name>
                        <config>
                            <interface-name>xe1</interface-name>
                            <distance>10</distance>
                        </config>
                    </gateway-interface-route>
                    <config>
                        <destination-prefix>192.168.0.0/24</destination-
prefix>
                        <gateway-address>172.17.31.2</gateway-address>
                    </config>
                </route>
            </ipv4>
        </static-routes>
    </vrf>
</network-instance>
</network-instances>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about creating a static route with load balancing.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
    <network-instance>
        <name>TEST_A9</name>

```

```

    <config>
      <name>TEST_A9</name>
      <type xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
    </config>
    <state>
      <name>TEST_A9</name>
      <type xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
    </state>
    <protocols>
      <protocol xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">
        <identifier>oc-pol-types:DIRECTLY_CONNECTED</identifier>
        <name>DIRECTLY_CONNECTED</name>
        <config>
          <identifier>oc-pol-types:DIRECTLY_CONNECTED</identifier>
          <name>DIRECTLY_CONNECTED</name>
          <enabled>true</enabled>
        </config>
      </protocol>
      <protocol xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">
        <identifier>oc-pol-types:STATIC</identifier>
        <name>static-routes</name>
        <config>
          <identifier>oc-pol-types:STATIC</identifier>
          <name>static-routes</name>
        </config>
        <static-routes>
          <static>
            <prefix>192.168.0.0/24</prefix>
            <next-hops>
              <next-hop>
                <index>172.17.30.2</index>
                <interface-ref>
                  <config>
                    <interface>xe2</interface>
                  </config>
                  <state>
                    <interface>xe2</interface>
                  </state>
                </interface-ref>
              <config>
                <metric>10</metric>
                <index>172.17.30.2</index>
                <next-hop>172.17.30.2</next-hop>
              </config>
              <state>
                <metric>10</metric>
                <index>172.17.30.2</index>
                <next-hop>172.17.30.2</next-hop>
              </state>
            </next-hop>
            <next-hop>
              <index>172.17.31.2</index>
              <interface-ref>

```

```

        <config>
          <interface>xel</interface>
        </config>
        <state>
          <interface>xel</interface>
        </state>
      </interface-ref>
      <config>
        <metric>10</metric>
        <index>172.17.31.2</index>
        <next-hop>172.17.31.2</next-hop>
      </config>
      <state>
        <metric>10</metric>
        <index>172.17.31.2</index>
        <next-hop>172.17.31.2</next-hop>
      </state>
    </next-hop>
  </next-hops>
  <config>
    <prefix>192.168.0.0/24</prefix>
  </config>
  <state>
    <prefix>192.168.0.0/24</prefix>
    <prefix>192.168.0.0/24</prefix>
  </state>
</static>
</static-routes>
</protocol>
</protocols>
<tables xmlns:oc-types="http://openconfig.net/yang/openconfig-types">
  <table xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">
    <protocol>oc-pol-types:DIRECTLY_CONNECTED</protocol>
    <address-family>oc-types:IPV4</address-family>
    <config>
      <protocol>oc-pol-types:DIRECTLY_CONNECTED</protocol>
      <address-family>oc-types:IPV4</address-family>
    </config>
  </table>
  <table xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">
    <protocol>oc-pol-types:DIRECTLY_CONNECTED</protocol>
    <address-family>oc-types:IPV6</address-family>
    <config>
      <protocol>oc-pol-types:DIRECTLY_CONNECTED</protocol>
      <address-family>oc-types:IPV6</address-family>
    </config>
  </table>
  <table xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">
    <protocol>oc-pol-types:STATIC</protocol>
    <address-family>oc-types:IPV4</address-family>
    <config>
      <protocol>oc-pol-types:STATIC</protocol>
      <address-family>oc-types:IPV4</address-family>
    </config>
  </table>
</tables>
</interfaces>

```

```

<interface>
  <id>lo.TEST_A9</id>
  <config>
    <interface>lo.TEST_A9</interface>
    <id>lo.TEST_A9</id>
  </config>
</interface>
<interface>
  <id>xe1</id>
  <config>
    <interface>xe1</interface>
    <id>xe1</id>
  </config>
</interface>
<interface>
  <id>xe2</id>
  <config>
    <interface>xe2</interface>
    <id>xe2</id>
  </config>
</interface>
</interfaces>
</network-instance>
</network-instances>

```

Restrictions

/network-instances/network-instance/protocols/protocol/static-routes/static/next-hops/next-hop

It is necessary to have at least one entry in this list of next hops

/network-instances/network-instance/protocols/protocol/static-routes/static/next-hops/next-hop/index

Whenever config/next-hop leaf is configured, the index must have the same value as the next-hop. If not, the index must match the interface name built from interface-ref/config/interface and interface-ref/config/subinterface. For example, "xe1", "xe2.100" and so on.

Create a Static Route with Active/Standby

This XML configuration snippet is used to create two paths to a specified destination prefix and mask for the network and a gateway working in active/standby scenario. With these two links, it is possible to guarantee the service availability. All the traffic must be routed throughout the active link while the passive link must be configured to receive the traffic in case of any failure in the active link.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create a static route with active/standby.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <!-- double link in a single PE of any L3 VPN -->
  <network-instance>
    <name>TEST_A8</name>
    <config>
      <name>TEST_A8</name>
      <type>L3VRF</type>
    </config>
    <interfaces>
      <interface>
        <id>xe2</id>
        <config>
          <id>xe2</id>
          <interface>xe2</interface>
        </config>
      </interface>
      <interface>
        <id>xe4</id>
        <config>
          <id>xe4</id>
          <interface>xe4</interface>
        </config>
      </interface>
    </interfaces>
    <protocols>
      <protocol>
        <identifier>STATIC</identifier>
        <name>static-route</name>
        <config>
          <identifier>STATIC</identifier>
          <name>static-route</name>
          <enabled>true</enabled>
        </config>
        <static-routes>
          <static>
            <prefix>192.168.0.0/24</prefix>
            <config>
              <prefix>192.168.0.0/24</prefix>
            </config>
            <next-hops>
              <next-hop>
                <index>172.17.30.2</index>
                <config>
                  <index>172.17.30.2</index>
                  <next-hop>172.17.30.2</next-hop>
                  <metric>10</metric>
                </config>
                <interface-ref>
                  <config>
                    <interface>xe2</interface>
                  </config>
                </interface-ref>
              </next-hop>
              <next-hop>
                <index>172.17.40.2</index>
                <config>
                  <index>172.17.40.2</index>
```



```

        <next-hop>172.17.40.2</next-hop>
        <metric>30</metric>
    </config>
    <interface-ref>
        <config>
            <interface>xe4</interface>
        </config>
    </interface-ref>
</next-hop>
</next-hops>
</static>
</static-routes>
</protocol>
</protocols>
</network-instance>
</network-instances>

```

OcNOS CLI Command

This CLI command is used to create a static route with active/standby.

```

interface xe2
  ip vrf forwarding TEST_A8
!
interface xe4
  ip vrf forwarding TEST_A8
!
ip route vrf TEST_A8 192.168.0.0/24 172.17.30.2 xe2 10
ip route vrf TEST_A8 192.168.0.0/24 172.17.40.2 xe4 30
!

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to create a static route with active/standby.

```

<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-
network-instance">
  <network-instance>
    <instance-name>TEST_A8</instance-name>
    <instance-type>vrf</instance-type>
    <config>
      <instance-name>TEST_A8</instance-name>
      <instance-type>vrf</instance-type>
    </config>
    <vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vrf">
      <config>
        <vrf-name>TEST_A8</vrf-name>
      </config>
      <static-routes xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-
rib-vrf">
        <ipv4>
          <route>
            <destination-prefix>192.168.0.0/24</destination-prefix>
            <gateway-address>172.17.30.2</gateway-address>
            <gateway-interface-route>
              <interface-name>xe2</interface-name>
            </gateway-interface-route>
          </route>
        </ipv4>
      </static-routes>
    </vrf>
  </network-instance>
</network-instances>

```

```

        <distance>10</distance>
        <interface-name>xe2</interface-name>
    </config>
</gateway-interface-route>
<config>
    <gateway-address>172.17.30.2</gateway-address>
    <destination-prefix>192.168.0.0/24</destination-prefix>
</config>
</route>
<route>
    <destination-prefix>192.168.0.0/24</destination-prefix>
    <gateway-address>172.17.40.2</gateway-address>
    <gateway-interface-route>
        <interface-name>xe4</interface-name>
        <config>
            <distance>30</distance>
            <interface-name>xe4</interface-name>
        </config>
    </gateway-interface-route>
    <config>
        <gateway-address>172.17.40.2</gateway-address>
        <destination-prefix>192.168.0.0/24</destination-prefix>
    </config>
</route>
</ipv4>
</static-routes>
</vrf>
</network-instance>
</network-instances>
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
    <interface>
        <name>xe2</name>
        <config>
            <vrf-name>TEST_A8</vrf-name>
            <name>xe2</name>
        </config>
    </interface>
    <interface>
        <name>xe4</name>
        <config>
            <vrf-name>TEST_A8</vrf-name>
            <name>xe4</name>
        </config>
    </interface>
</interfaces>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about creating a static route with active/standby.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
    <network-instance>
        <name>TEST_A8</name>
        <config>
            <name>TEST_A8</name>

```

```

    <type xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
  </config>
  <state>
    <name>TEST_A8</name>
    <type xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L3VRF</type>
  </state>
  <protocols>
    <protocol xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">
      <identifier>oc-pol-types:DIRECTLY_CONNECTED</identifier>
      <name>DIRECTLY_CONNECTED</name>
      <config>
        <identifier>oc-pol-types:DIRECTLY_CONNECTED</identifier>
        <name>DIRECTLY_CONNECTED</name>
        <enabled>true</enabled>
      </config>
    </protocol>
    <protocol xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">
      <identifier>oc-pol-types:STATIC</identifier>
      <name>static-routes</name>
      <config>
        <identifier>oc-pol-types:STATIC</identifier>
        <name>static-routes</name>
      </config>
      <static-routes>
        <static>
          <prefix>192.168.0.0/24</prefix>
          <next-hops>
            <next-hop>
              <index>172.17.30.2</index>
              <interface-ref>
                <config>
                  <interface>xe2</interface>
                </config>
                <state>
                  <interface>xe2</interface>
                </state>
              </interface-ref>
              <config>
                <metric>10</metric>
                <index>172.17.30.2</index>
                <next-hop>172.17.30.2</next-hop>
              </config>
              <state>
                <metric>10</metric>
                <index>172.17.30.2</index>
                <next-hop>172.17.30.2</next-hop>
              </state>
            </next-hop>
            <next-hop>
              <index>172.17.40.2</index>
              <interface-ref>
                <config>
                  <interface>xe4</interface>

```

```

        </config>
        <state>
            <interface>xe4</interface>
        </state>
    </interface-ref>
    <config>
        <metric>30</metric>
        <index>172.17.40.2</index>
        <next-hop>172.17.40.2</next-hop>
    </config>
    <state>
        <metric>30</metric>
        <index>172.17.40.2</index>
        <next-hop>172.17.40.2</next-hop>
    </state>
</next-hop>
</next-hops>
<config>
    <prefix>192.168.0.0/24</prefix>
</config>
<state>
    <prefix>192.168.0.0/24</prefix>
    <prefix>192.168.0.0/24</prefix>
</state>
</static>
</static-routes>
</protocol>
</protocols>
<tables xmlns:oc-types="http://openconfig.net/yang/openconfig-types">
    <table xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">
        <protocol>oc-pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family>oc-types:IPV4</address-family>
        <config>
            <protocol>oc-pol-types:DIRECTLY_CONNECTED</protocol>
            <address-family>oc-types:IPV4</address-family>
        </config>
    </table>
    <table xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">
        <protocol>oc-pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family>oc-types:IPV6</address-family>
        <config>
            <protocol>oc-pol-types:DIRECTLY_CONNECTED</protocol>
            <address-family>oc-types:IPV6</address-family>
        </config>
    </table>
    <table xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">
        <protocol>oc-pol-types:STATIC</protocol>
        <address-family>oc-types:IPV4</address-family>
        <config>
            <protocol>oc-pol-types:STATIC</protocol>
            <address-family>oc-types:IPV4</address-family>
        </config>
    </table>
</tables>
<interfaces>
    <interface>
        <id>lo.TEST_A8</id>

```

```
<config>
  <interface>lo.TEST_A8</interface>
  <id>lo.TEST_A8</id>
</config>
</interface>
<interface>
  <id>xe2</id>
  <config>
    <interface>xe2</interface>
    <id>xe2</id>
  </config>
</interface>
<interface>
  <id>xe4</id>
  <config>
    <interface>xe4</interface>
    <id>xe4</id>
  </config>
</interface>
</interfaces>
</network-instance>
</network-instances>
```

Restrictions

/network-instances/network-instance/protocols/protocol/static-routes/static/next-hops/next-hop

It is necessary to have at least one entry in this list of next hops.

/network-instances/network-instance/protocols/protocol/static-routes/static/next-hops/next-hop/index

Whenever config/next-hop leaf is configured, the index must have the same value as the next-hop. If not, the index must match the interface name built from interface-ref/config/interface and interface-ref/config/subinterface. For example, "xe1", "xe2.100" and so on.

Use Cases

In this chapter, there are scenarios that can be accomplished using OpenConfig configuration XML files, showing complex interactions between different objects.

Platform OpenConfig Translation

Description

The read-only state attributes listed here are valid for the platform Edgecore 5912-54X-O-AC-F.

FAN

This platform type displays the fan status of the boards.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```
<filter type="subtree">
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <state>
        <type>oc-platform-types:FAN</type>
      </state>
      <fan></fan>
    </component>
  </components>
</filter>
```

Get OpenConfig Return

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>FAN-1/1</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>FAN-1/1</id>
      <name>FAN-1/1</name>
      <parent>FAN_TRAY-1</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>false</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
```

```

        <location>1</location>
        <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:FAN</type>
        </state>
        <fan>
            <state>
                <speed xmlns="http://openconfig.net/yang/platform/fan">9800</speed>
            </state>
        </fan>
    </component>
    <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
        <name>FAN-1/2</name>
        <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
            <id>FAN-1/2</id>
            <name>FAN-1/2</name>
            <parent>FAN_TRAY-1</parent>
            <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
            <removable>false</removable>
            <part-no>NA</part-no>
            <serial-no>NA</serial-no>
            <software-version>NA</software-version>
            <firmware-version>NA</firmware-version>
            <hardware-version>NA</hardware-version>
            <description>NA</description>
            <mfg-name>NA</mfg-name>
            <location>2</location>
            <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:FAN</type>
            </state>
            <fan>
                <state>
                    <speed xmlns="http://openconfig.net/yang/platform/fan">8300</speed>
                </state>
            </fan>
        </component>
        <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
            <name>FAN-2/1</name>
            <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
                <id>FAN-2/1</id>
                <name>FAN-2/1</name>
                <parent>FAN_TRAY-2</parent>
                <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
                <removable>false</removable>
                <part-no>NA</part-no>
                <serial-no>NA</serial-no>
                <software-version>NA</software-version>
                <firmware-version>NA</firmware-version>
                <hardware-version>NA</hardware-version>
                <description>NA</description>

```

```

        <mfg-name>NA</mfg-name>
        <location>1</location>
        <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:FAN</type>
        </state>
        <fan>
            <state>
                <speed xmlns="http://openconfig.net/yang/platform/fan">10400</speed>
            </state>
        </fan>
    </component>
    <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
        <name>FAN-2/2</name>
        <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
            <id>FAN-2/2</id>
            <name>FAN-2/2</name>
            <parent>FAN_TRAY-2</parent>
            <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
            <removable>false</removable>
            <part-no>NA</part-no>
            <serial-no>NA</serial-no>
            <software-version>NA</software-version>
            <firmware-version>NA</firmware-version>
            <hardware-version>NA</hardware-version>
            <description>NA</description>
            <mfg-name>NA</mfg-name>
            <location>2</location>
            <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:FAN</type>
            </state>
            <fan>
                <state>
                    <speed xmlns="http://openconfig.net/yang/platform/fan">8700</speed>
                </state>
            </fan>
        </component>
        <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
            <name>FAN-3/1</name>
            <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
                <id>FAN-3/1</id>
                <name>FAN-3/1</name>
                <parent>FAN_TRAY-3</parent>
                <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
                <removable>false</removable>
                <part-no>NA</part-no>
                <serial-no>NA</serial-no>
                <software-version>NA</software-version>
                <firmware-version>NA</firmware-version>
                <hardware-version>NA</hardware-version>

```



```

    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>1</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:FAN</type>
  </state>
  <fan>
    <state>
      <speed xmlns="http://openconfig.net/yang/platform/fan">10300</speed>
    </state>
  </fan>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>FAN-3/2</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>FAN-3/2</id>
    <name>FAN-3/2</name>
    <parent>FAN_TRAY-3</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>false</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>2</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:FAN</type>
  </state>
  <fan>
    <state>
      <speed xmlns="http://openconfig.net/yang/platform/fan">8700</speed>
    </state>
  </fan>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>FAN-4/1</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>FAN-4/1</id>
    <name>FAN-4/1</name>
    <parent>FAN_TRAY-4</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>false</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>

```

```

    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>1</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:FAN</type>
  </state>
  <fan>
    <state>
      <speed xmlns="http://openconfig.net/yang/platform/fan">10200</speed>
    </state>
  </fan>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>FAN-4/2</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>FAN-4/2</id>
    <name>FAN-4/2</name>
    <parent>FAN_TRAY-4</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>false</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>2</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:FAN</type>
  </state>
  <fan>
    <state>
      <speed xmlns="http://openconfig.net/yang/platform/fan">8600</speed>
    </state>
  </fan>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>FAN-5/1</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>FAN-5/1</id>
    <name>FAN-5/1</name>
    <parent>FAN_TRAY-5</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>false</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>

```

```

        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>1</location>
        <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:FAN</type>
        </state>
        <fan>
            <state>
                <speed xmlns="http://openconfig.net/yang/platform/fan">10000</speed>
            </state>
        </fan>
    </component>
    <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
        <name>FAN-5/2</name>
        <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
            <id>FAN-5/2</id>
            <name>FAN-5/2</name>
            <parent>FAN_TRAY-5</parent>
            <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
            <removable>false</removable>
            <part-no>NA</part-no>
            <serial-no>NA</serial-no>
            <software-version>NA</software-version>
            <firmware-version>NA</firmware-version>
            <hardware-version>NA</hardware-version>
            <description>NA</description>
            <mfg-name>NA</mfg-name>
            <location>2</location>
            <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:FAN</type>
            </state>
            <fan>
                <state>
                    <speed xmlns="http://openconfig.net/yang/platform/fan">8400</speed>
                </state>
            </fan>
        </component>
    <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
        <name>FAN-6/1</name>
        <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
            <id>FAN-6/1</id>
            <name>FAN-6/1</name>
            <parent>FAN_TRAY-6</parent>
            <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
            <removable>false</removable>
            <part-no>NA</part-no>
            <serial-no>NA</serial-no>

```

```

    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>1</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:FAN</type>
  </state>
  <fan>
    <state>
      <speed xmlns="http://openconfig.net/yang/platform/fan">10100</speed>
    </state>
  </fan>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>FAN-6/2</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>FAN-6/2</id>
    <name>FAN-6/2</name>
    <parent>FAN_TRAY-6</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>false</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>2</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:FAN</type>
  </state>
  <fan>
    <state>
      <speed xmlns="http://openconfig.net/yang/platform/fan">8500</speed>
    </state>
  </fan>
</component>

```

Get OcNOS Result

Here is the NetConf response in IPI datamodel representation.

```

<components xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <component>
    <name>FAN-1/1</name>
    <state>
      <name>FAN-1/1</name>
      <parent>FAN_TRAY-1</parent>
      <product-name>NA</product-name>
    </state>
  </component>

```

```

    <oper-status>NA</oper-status>
    <removable>false</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>1</location>
    <type>fan</type>
  </state>
</fan>
</component>
<component>
  <name>FAN-1/2</name>
  <state>
    <name>FAN-1/2</name>
    <parent>FAN_TRAY-1</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>false</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>2</location>
    <type>fan</type>
  </state>
  <fan>
    <state>
      <fan-location>rear</fan-location>
      <fan-status>running</fan-status>
      <maximum-rpm>18000</maximum-rpm>
      <minimum-rpm>8500</minimum-rpm>
      <rpm>8300</rpm>
      <fan-index>2</fan-index>
    </state>
  </fan>
</component>
<component>
  <name>FAN-2/1</name>
  <state>
    <name>FAN-2/1</name>
    <parent>FAN_TRAY-2</parent>

```

```

    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>false</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>1</location>
    <type>fan</type>
  </state>
</fan>
</component>
<component>
  <name>FAN-2/2</name>
  <state>
    <name>FAN-2/2</name>
    <parent>FAN_TRAY-2</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>false</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>2</location>
    <type>fan</type>
  </state>
  <fan>
    <state>
      <fan-location>rear</fan-location>
      <fan-status>running</fan-status>
      <maximum-rpm>18000</maximum-rpm>
      <minimum-rpm>8500</minimum-rpm>
      <rpm>8700</rpm>
      <fan-index>2</fan-index>
    </state>
  </fan>
</component>
<component>
  <name>FAN-3/1</name>
  <state>
    <name>FAN-3/1</name>

```

```

    <parent>FAN_TRAY-3</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>false</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>1</location>
    <type>fan</type>
  </state>
</fan>
</component>
<component>
  <name>FAN-3/2</name>
  <state>
    <name>FAN-3/2</name>
    <parent>FAN_TRAY-3</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>false</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>2</location>
    <type>fan</type>
  </state>
  <fan>
    <state>
      <fan-location>rear</fan-location>
      <fan-status>running</fan-status>
      <maximum-rpm>18000</maximum-rpm>
      <minimum-rpm>8500</minimum-rpm>
      <rpm>8700</rpm>
      <fan-index>2</fan-index>
    </state>
  </fan>
</component>
<component>
  <name>FAN-4/1</name>
  <state>

```

```
<name>FAN-4/1</name>
<parent>FAN_TRAY-4</parent>
<product-name>NA</product-name>
<oper-status>NA</oper-status>
<removable>>false</removable>
<part-no>NA</part-no>
<serial-no>NA</serial-no>
<software-version>NA</software-version>
<firmware-version>NA</firmware-version>
<hardware-version>NA</hardware-version>
<description>NA</description>
<mfg-name>NA</mfg-name>
<location>1</location>
<type>fan</type>
</state>
<fan>
  <state>
    <fan-location>front</fan-location>
    <fan-status>running</fan-status>
    <maximum-rpm>21500</maximum-rpm>
    <minimum-rpm>10000</minimum-rpm>
    <rpm>10200</rpm>
    <fan-index>1</fan-index>
  </state>
</fan>
</component>
<component>
  <name>FAN-4/2</name>
  <state>
    <name>FAN-4/2</name>
    <parent>FAN_TRAY-4</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>>false</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>2</location>
    <type>fan</type>
  </state>
  <fan>
    <state>
      <fan-location>rear</fan-location>
      <fan-status>running</fan-status>
      <maximum-rpm>18000</maximum-rpm>
      <minimum-rpm>8500</minimum-rpm>
      <rpm>8600</rpm>
      <fan-index>2</fan-index>
    </state>
  </fan>
</component>
<component>
  <name>FAN-5/1</name>
```



```
<state>
  <name>FAN-5/1</name>
  <parent>FAN_TRAY-5</parent>
  <product-name>NA</product-name>
  <oper-status>NA</oper-status>
  <removable>false</removable>
  <part-no>NA</part-no>
  <serial-no>NA</serial-no>
  <software-version>NA</software-version>
  <firmware-version>NA</firmware-version>
  <hardware-version>NA</hardware-version>
  <description>NA</description>
  <mfg-name>NA</mfg-name>
  <location>1</location>
  <type>fan</type>
</state>
<fan>
  <state>
    <fan-location>front</fan-location>
    <fan-status>running</fan-status>
    <maximum-rpm>21500</maximum-rpm>
    <minimum-rpm>10000</minimum-rpm>
    <rpm>10000</rpm>
    <fan-index>1</fan-index>
  </state>
</fan>
</component>
<component>
  <name>FAN-5/2</name>
  <state>
    <name>FAN-5/2</name>
    <parent>FAN_TRAY-5</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>false</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>2</location>
    <type>fan</type>
  </state>
  <fan>
    <state>
      <fan-location>rear</fan-location>
      <fan-status>running</fan-status>
      <maximum-rpm>18000</maximum-rpm>
      <minimum-rpm>8500</minimum-rpm>
      <rpm>8400</rpm>
      <fan-index>2</fan-index>
    </state>
  </fan>
</component>
</component>
```

```
<name>FAN-6/1</name>
<state>
  <name>FAN-6/1</name>
  <parent>FAN_TRAY-6</parent>
  <product-name>NA</product-name>
  <oper-status>NA</oper-status>
  <removable>false</removable>
  <part-no>NA</part-no>
  <serial-no>NA</serial-no>
  <software-version>NA</software-version>
  <firmware-version>NA</firmware-version>
  <hardware-version>NA</hardware-version>
  <description>NA</description>
  <mfg-name>NA</mfg-name>
  <location>1</location>
  <type>fan</type>
</state>
<fan>
  <state>
    <fan-location>front</fan-location>
    <fan-status>running</fan-status>
    <maximum-rpm>21500</maximum-rpm>
    <minimum-rpm>10000</minimum-rpm>
    <rpm>10100</rpm>
    <fan-index>1</fan-index>
  </state>
</fan>
</component>
<component>
  <name>FAN-6/2</name>
  <state>
    <name>FAN-6/2</name>
    <parent>FAN_TRAY-6</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>false</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>2</location>
    <type>fan</type>
  </state>
  <fan>
    <state>
      <fan-location>rear</fan-location>
      <fan-status>running</fan-status>
      <maximum-rpm>18000</maximum-rpm>
      <minimum-rpm>8500</minimum-rpm>
      <rpm>8500</rpm>
      <fan-index>2</fan-index>
    </state>
  </fan>
</component>
```

Show command

Here is Show command output that displays the hardware information for the fan.

```
OcNOS#show hardware-information fan
```

Codes : R - Rear Fan, F - Front Fan, U - Unknown

FAN TRAY	FAN	RPM	MINRPM	MAXRPM
1	1 (F)	9800	10000	21500
1	2 (R)	8300	8500	18000
2	1 (F)	10400	10000	21500
2	2 (R)	8700	8500	18000
3	1 (F)	10300	10000	21500
3	2 (R)	8700	8500	18000
4	1 (F)	10100	10000	21500
4	2 (R)	8600	8500	18000
5	1 (F)	10000	10000	21500
5	2 (R)	8400	8500	18000
6	1 (F)	10100	10000	21500
6	2 (R)	8500	8500	18000

RAM

This platform type displays the memory information of the boards.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```
<filter type="subtree">
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>RAM</name>
    </component>
  </components>
</filter>
```

Get OpenConfig Return

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>RAM</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>RAM</id>
      <name>RAM</name>
      <parent>CHASSIS</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
```

```

    <removable>false</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>0</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:RAM</type>
    <memory>
      <utilized>1118830592</utilized>
      <available>16792944640</available>
    </memory>
  </state>
</component>
</components>

```

OcNOS get result

Here is the NetConf response in IPI datamodel representation.

```

<components xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <component>
    <name>RAM</name>
    <state>
      <name>RAM</name>
      <parent>CHASSIS</parent>
      <product-name>NA</product-name>
      <oper-status>NA</oper-status>
      <removable>false</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>0</location>
      <type>ram</type>
      <memory>
        <utilized>1066</utilized>
        <available>16015</available>
      </memory>
    </state>
  </component>
  <ram>
    <state>
      <usage-alert-threshold>90</usage-alert-threshold>
      <usage-critical-threshold>80</usage-critical-threshold>
      <unit-size>1</unit-size>
      <available-high-memory>0</available-high-memory>
      <total-high-memory>0</total-high-memory>
      <current-process-count>214</current-process-count>
      <free-swap>0</free-swap>
      <total-swap>0</total-swap>
    </state>
  </ram>

```

```
<buffers>18</buffers>
<shared-memory>8</shared-memory>
<available-memory>14948</available-memory>
<used-memory>1066</used-memory>
<total-memory>16015</total-memory>
</state>
</ram>
</component>
</components>
```

Show command

Here is Show command output that displays the hardware information for the RAM.

```
OcNOS#show hardware-information memory
-----
          RAM INFORMATION
-----

Total                : 16015 MB
Used                 : 1067 MB (7 %)
Free                 : 14947 MB (93 %)
Shared               : 8 MB
Buffers              : 17 MB
Total Swap           : 0 MB
Free Swap            : 0 MB
Current Processes    : 217
Total High Memory    : 0 MB
Available High Memory : 0 MB
Unit Size            : 1 Bytes
Alert Threshold      : 90 %
Critical Threshold    : 80 %
-----

          HARD DISK INFORMATION
-----

Serial Number        : F929740043
Model Number         : TS32GMSA370
Firmware Revision    : P1225CH1TS32GMSA370
Cylinders            : 16383
Heads                 : 16
Sectors              : 62533296
Unformatted Bytes/Track : 0
Unformatted Bytes/Sector : 0
Revision No          : 1008.0
Usage Alert Threshold : 90 %
Usage Critical Threshold : 80 %
-----



| Filesystem  | Total | Used | Free  | Use% |
|-------------|-------|------|-------|------|
| /           | 22000 | 6446 | 15554 | 29%  |
| /cfg        | 476   | 90   | 386   | 19%  |
| /installers | 4911  | 282  | 4629  | 6%   |


-----
```

Hard-disk

This platform type displays hard-disk information of the boards.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```
<filter type="subtree">
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>HARD-DISK</name>
    </component>
  </components>
</filter>
```

Get OpenConfig Return

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>HARD-DISK</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>HARD-DISK</id>
      <name>HARD-DISK</name>
      <parent>CHASSIS</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>false</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>0</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:STORAGE</type>
      <memory>
        <utilized>6759120896</utilized>
        <available>23068672000</available>
      </memory>
    </state>
  </component>
</components>
```

OcNOS get result

Here is the NetConf response in IPI datamodel representation.

```

<components xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <component>
    <name>HARD-DISK</name>
    <state>
      <name>HARD-DISK</name>
      <parent>CHASSIS</parent>
      <product-name>NA</product-name>
      <oper-status>NA</oper-status>
      <removable>false</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>0</location>
      <type>storage</type>
      <memory>
        <utilized>6446</utilized>
        <available>22000</available>
      </memory>
    </state>
    <storage>
      <state>
        <usage-alert-threshold>90</usage-alert-threshold>
        <usage-critical-threshold>80</usage-critical-threshold>
        <free-memory>15554</free-memory>
        <used-memory>6446</used-memory>
        <total-memory>22000</total-memory>
        <revision-number>1008.0</revision-number>
        <unformatted-bytes-or-sector>0</unformatted-bytes-or-sector>
        <unformatted-bytes-or-track>0</unformatted-bytes-or-track>
        <sector-count>62533296</sector-count>
        <head-count>16</head-count>
        <cylinder-count>16383</cylinder-count>
        <firmware-revision>P1225CH1TS32GMSA370
revision>
          <model-number>TS32GMSA370
          </model-number>
          <serial-number>F929740043
          </serial-number>
        </state>
      <mounted-fileSYSTEMS>
        <mounted-fileSYSTEM>
          <mount-point>/</mount-point>
          <state>
            <mount-point>/</mount-point>
            <usage>29</usage>
            <free>15554</free>
            <used>6446</used>
            <total>22000</total>
          </state>
        </mounted-fileSYSTEM>
        <mounted-fileSYSTEM>
          <mount-point>/cfg</mount-point>
          <state>
            <mount-point>/cfg</mount-point>
            <usage>19</usage>

```

```

        <free>386</free>
        <used>90</used>
        <total>476</total>
    </state>
</mounted-filesystem>
<mounted-filesystem>
    <mount-point>/installers</mount-point>
    <state>
        <mount-point>/installers</mount-point>
        <usage>6</usage>
        <free>4629</free>
        <used>282</used>
        <total>4911</total>
    </state>
</mounted-filesystem>
</mounted-filesystems>
</storage>
</component>
</components>

```

Show command

Here is Show command output that displays the hardware information of the hard-disk.

```

OcNOS#show hardware-information memory
-----
          RAM INFORMATION
-----

Total                : 16015 MB
Used                 : 1067 MB (7 %)
Free                 : 14947 MB (93 %)
Shared               : 8 MB
Buffers              : 17 MB
Total Swap           : 0 MB
Free Swap            : 0 MB
Current Processes    : 217
Total High Memory    : 0 MB
Available High Memory : 0 MB
Unit Size            : 1 Bytes
Alert Threshold      : 90 %
Critical Threshold    : 80 %
-----

          HARD DISK INFORMATION
-----

Serial Number        : F929740043
Model Number         : TS32GMSA370
Firmware Revision    : P1225CH1TS32GMSA370
Cylinders             : 16383
Heads                 : 16
Sectors              : 62533296
Unformatted Bytes/Track : 0
Unformatted Bytes/Sector : 0
Revision No          : 1008.0
Usage Alert Threshold : 90 %
Usage Critical Threshold : 80 %

```


Filesystem	Total	Used	Free	Use%
/	22000	6446	15554	29%
/cfg	476	90	386	19%
/installers	4911	282	4629	6%

PSU

This platform type displays Power Supply Unit (PSU) information.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```
<filter type="subtree">
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <state>
        <type>oc-platform-types:POWER_SUPPLY</type>
      </state>
      <power-supply/>
    </component>
  </components>
</filter>
```

Get OpenConfig Return

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>PSU-1</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>PSU-1</id>
      <name>PSU-1</name>
      <parent>CHASSIS</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>YM-2651Y</part-no>
      <serial-no>TA100V582031000097</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>3Y POWER</mfg-name>
      <location>1</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:POWER_SUPPLY</type>
```

```

    </state>
    <power-supply>
      <state>
        <output-current xmlns="http://openconfig.net/yang/platform/
psu">8.88</output-current>
        <output-voltage xmlns="http://openconfig.net/yang/platform/
psu">11.81</output-voltage>
        <output-power xmlns="http://openconfig.net/yang/platform/
psu">104.00</output-power>
        <enabled xmlns="http://openconfig.net/yang/platform/psu">true</
enabled>
      </state>
    </power-supply>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>PSU-2</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>PSU-2</id>
      <name>PSU-2</name>
      <parent>CHASSIS</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>2</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:POWER_SUPPLY</type>
    </state>
  </power-supply>
  <state>
    <enabled xmlns="http://openconfig.net/yang/platform/psu">false</
enabled>
  </state>
</power-supply>
</component>
</components>

```

OcNOS get result

Here is the NetConf response in IPI datamodel representation.

```

<components xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <component>
    <name>PSU-1</name>
    <state>
      <name>PSU-1</name>
      <parent>CHASSIS</parent>
      <product-name>NA</product-name>

```

```

    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>YM-2651Y</part-no>
    <serial-no>TA100V582031000097</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>3Y POWER</mfg-name>
    <location>1</location>
    <type>power-supply</type>
  </state>
  <power-supply>
    <state>
      <supported-parameters>volt-in volt-out curr-in curr-out power-in
power-out temp-1 temp-2 fan-1 fan-2</supported-parameters>
      <output-power-status>good</output-power-status>
      <input-power-status>good</input-power-status>
      <fan1-rpm>26688</fan1-rpm>
      <temperature-sensor2>31.00</temperature-sensor2>
      <temperature-sensor1>27.00</temperature-sensor1>
      <output-current>8.88</output-current>
      <output-voltage>11.81</output-voltage>
      <power-consumption>105.00</power-consumption>
      <hot-swap-state>unknown</hot-swap-state>
      <operational-status>running</operational-status>
    </state>
  </power-supply>
</component>
<component>
  <name>PSU-2</name>
  <state>
    <name>PSU-2</name>
    <parent>CHASSIS</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>2</location>
    <type>power-supply</type>
  </state>
  <power-supply>
    <state>
      <supported-parameters>volt-in volt-out curr-in curr-out power-in
power-out temp-1 temp-2 fan-1 fan-2</supported-parameters>
      <output-power-status>fail</output-power-status>
      <input-power-status>fail</input-power-status>
      <temperature-sensor2>0.00</temperature-sensor2>
      <temperature-sensor1>0.00</temperature-sensor1>
      <hot-swap-state>unknown</hot-swap-state>
      <operational-status>faulty</operational-status>
    </state>
  </power-supply>
</component>

```

```

        </state>
      </power-supply>
    </component>

    <components xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
      <component>
        <name>POWER-RAIL</name>
        <state>
          <name>POWER-RAIL</name>
          <parent>CHASSIS</parent>
          <product-name>NA</product-name>
          <oper-status>NA</oper-status>
          <removable>false</removable>
          <part-no>NA</part-no>
          <serial-no>NA</serial-no>
          <software-version>NA</software-version>
          <firmware-version>NA</firmware-version>
          <hardware-version>NA</hardware-version>
          <description>NA</description>
          <mfg-name>NA</mfg-name>
          <location>0</location>
          <type>power-rail</type>
        </state>
        <power-rail>
          <state>
            <power-supply-2-ac-alert-power-rail>fail</power-supply-2-ac-alert-
power-rail>
            <power-supply-1-ac-alert-power-rail>good</power-supply-1-ac-alert-
power-rail>
            <power-supply-2-v12-power-rail>fail</power-supply-2-v12-power-rail>
            <power-supply-1-v12-power-rail>good</power-supply-1-v12-power-rail>
          </state>
        </power-rail>
      </component>
    </components>

```

Show command

Here is Show command output that displays the hardware information for the power supply unit.

```
OcNOS#show hardware-information power
```

```

-----
      System Power Information
-----
CMM_PS1_12V_PG           : GOOD
CMM_PS2_12V_PG           : FAIL
CMM_PS1_AC_ALERT         : GOOD
CMM_PS2_AC_ALERT         : FAIL

Codes:      * Not Supported by device      NA Not Applicable

PSU          VOLT-IN    VOLT-OUT    CURR-IN    CURR-OUT    PWR-IN    PWR-OUT
TEMP-1       TEMP-2     FAN-1       FAN-2      PWR_OUT_MAX PWR-IN    PWR-OUT
              (Volt)     (Volt)      (Ampere)   (Ampere)   (Watt)    (Watt)
(Celsius)    (Celsius)    (Rpm)       (Rpm)      (Ampere)   (Watt)    (Watt)

```

1	NA	11.82	NA	8.80	NA	104.00
27.00	31.00	26688	NA*	NA*		

Temperature

This platform type displays temperature sensor information of the boards.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```
<filter type="subtree">
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <state>
        <temperature/>
      </state>
    </component>
  </components>
</filter>
```

Get OpenConfig return

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>TEMPERATURE-SENSOR1</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>TEMPERATURE-SENSOR1</id>
      <name>TEMPERATURE-SENSOR1</name>
      <temperature xmlns="http://openconfig.net/yang/platform">
        <alarm-severity>oc-alarm-types:UNKNOWN</alarm-severity>
        <alarm-threshold>0</alarm-threshold>
        <alarm-status>false</alarm-status>
        <interval xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">6000000000</interval>
        <avg xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">29.98</avg>
        <max xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">30.00</max>
        <min xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">29.00</min>
        <instant xmlns:oc-platform-types="http://openconfig.net/yang/
platform-types">30.00</instant>
      </temperature>
    </state>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>TEMPERATURE-SENSOR2</name>
```

```

    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>TEMPERATURE-SENSOR2</id>
      <name>TEMPERATURE-SENSOR2</name>
      <temperature xmlns="http://openconfig.net/yang/platform">
        <alarm-severity>oc-alarm-types:UNKNOWN</alarm-severity>
        <alarm-threshold>0</alarm-threshold>
        <alarm-status>false</alarm-status>
        <interval xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">6000000000</interval>
        <avg xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">28.98</avg>
        <max xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">29.00</max>
        <min xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">28.00</min>
        <instant xmlns:oc-platform-types="http://openconfig.net/yang/
platform-types">29.00</instant>
      </temperature>
    </state>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>TEMPERATURE-SENSOR3</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>TEMPERATURE-SENSOR3</id>
      <name>TEMPERATURE-SENSOR3</name>
      <temperature xmlns="http://openconfig.net/yang/platform">
        <alarm-severity>oc-alarm-types:UNKNOWN</alarm-severity>
        <alarm-threshold>0</alarm-threshold>
        <alarm-status>false</alarm-status>
        <interval xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">6000000000</interval>
        <avg xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">28.07</avg>
        <max xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">29.00</max>
        <min xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">28.00</min>
        <instant xmlns:oc-platform-types="http://openconfig.net/yang/
platform-types">28.00</instant>
      </temperature>
    </state>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>TEMPERATURE-BCM Chip</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>TEMPERATURE-BCM Chip</id>
      <name>TEMPERATURE-BCM Chip</name>
      <temperature xmlns="http://openconfig.net/yang/platform">
        <alarm-severity>oc-alarm-types:UNKNOWN</alarm-severity>
        <alarm-threshold>0</alarm-threshold>
        <alarm-status>false</alarm-status>
        <interval xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">6000000000</interval>
        <avg xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">48.49</avg>

```

```

    <max xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">49.60</max>
    <min xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">45.70</min>
    <instant xmlns:oc-platform-types="http://openconfig.net/yang/
platform-types">48.60</instant>
  </temperature>
</state>
</component>
</components>

```

OcNOS get result

Here is the NetConf response in IPI datamodel representation.

```

<components xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <component>
    <name>TEMPERATURE-SENSOR1</name>
    <state>
      <name>TEMPERATURE-SENSOR1</name>
      <temperature>
        <maximum-critical-temperature>60.00</maximum-critical-temperature>
        <minimum-critical-temperature>10.00</minimum-critical-temperature>
        <maximum-alert-temperature>65.00</maximum-alert-temperature>
        <minimum-alert-temperature>5.00</minimum-alert-temperature>
        <maximum-emergency-temperature>70.00</maximum-emergency-temperature>
        <minimum-emergency-temperature>0.00</minimum-emergency-temperature>
        <alarm-severity>indeterminate</alarm-severity>
        <alarm-threshold>0.00</alarm-threshold>
        <alarm-status>false</alarm-status>
        <sensor-index>0</sensor-index>
        <sensor-name>TEMPERATURE-SENSOR1</sensor-name>
        <interval>60</interval>
        <avg>29.98</avg>
        <max>30.00</max>
        <min>29.00</min>
        <instant>30.00</instant>
      </temperature>
    </state>
  </component>
  <component>
    <name>TEMPERATURE-SENSOR2</name>
    <state>
      <name>TEMPERATURE-SENSOR2</name>
      <temperature>
        <maximum-critical-temperature>60.00</maximum-critical-temperature>
        <minimum-critical-temperature>10.00</minimum-critical-temperature>
        <maximum-alert-temperature>65.00</maximum-alert-temperature>
        <minimum-alert-temperature>5.00</minimum-alert-temperature>
        <maximum-emergency-temperature>70.00</maximum-emergency-temperature>
        <minimum-emergency-temperature>0.00</minimum-emergency-temperature>
        <alarm-severity>indeterminate</alarm-severity>
        <alarm-threshold>0.00</alarm-threshold>
        <alarm-status>false</alarm-status>
        <sensor-index>1</sensor-index>
        <sensor-name>TEMPERATURE-SENSOR2</sensor-name>
        <interval>60</interval>

```

```
<avg>28.98</avg>
<max>29.00</max>
<min>28.00</min>
<instant>29.00</instant>
</temperature>
</state>
</component>
<component>
  <name>TEMPERATURE-SENSOR3</name>
  <state>
    <name>TEMPERATURE-SENSOR3</name>
    <temperature>
      <maximum-critical-temperature>60.00</maximum-critical-temperature>
      <minimum-critical-temperature>10.00</minimum-critical-temperature>
      <maximum-alert-temperature>65.00</maximum-alert-temperature>
      <minimum-alert-temperature>5.00</minimum-alert-temperature>
      <maximum-emergency-temperature>70.00</maximum-emergency-temperature>
      <minimum-emergency-temperature>0.00</minimum-emergency-temperature>
      <alarm-severity>indeterminate</alarm-severity>
      <alarm-threshold>0.00</alarm-threshold>
      <alarm-status>false</alarm-status>
      <sensor-index>2</sensor-index>
      <sensor-name>TEMPERATURE-SENSOR3</sensor-name>
      <interval>60</interval>
      <avg>28.07</avg>
      <max>29.00</max>
      <min>28.00</min>
      <instant>28.00</instant>
    </temperature>
  </state>
</component>
<component>
  <name>TEMPERATURE-BCM Chip</name>
  <state>
    <name>TEMPERATURE-BCM Chip</name>
    <temperature>
      <maximum-critical-temperature>75.00</maximum-critical-temperature>
      <minimum-critical-temperature>14.00</minimum-critical-temperature>
      <maximum-alert-temperature>80.00</maximum-alert-temperature>
      <minimum-alert-temperature>10.00</minimum-alert-temperature>
      <maximum-emergency-temperature>95.00</maximum-emergency-temperature>
      <minimum-emergency-temperature>0.00</minimum-emergency-temperature>
      <alarm-severity>indeterminate</alarm-severity>
      <alarm-threshold>0.00</alarm-threshold>
      <alarm-status>false</alarm-status>
      <sensor-index>3</sensor-index>
      <sensor-name>TEMPERATURE-BCM Chip</sensor-name>
      <interval>60</interval>
      <avg>48.49</avg>
      <max>49.60</max>
      <min>45.70</min>
      <instant>48.60</instant>
    </temperature>
  </state>
</component>
</components>
```

Show command

Here is Show command output that displays the hardware information for Temperature.

```
OcNOS#show hardware-information temperature
```

```
Board Temp Sensors Temperature in Degree C
```

```
-----  
SENSOR TYPE          CURR  EMER  ALRT CRIT CRIT ALRT EMER  MIN-  
TEMP  MAX-TEMP  AVG-TEMP          TEMP  MIN    MIN    MIN    MAX    MAX    MAX  
(Monitored since 00 hour,59 min)
```

```
-----  
SENSOR1          30.00  0    5    10    60    65    70    29.00  
30.00    29.98  
SENSOR2          29.00  0    5    10    60    65    70    28.00  
29.00    28.98  
SENSOR3          28.00  0    5    10    60    65    70    28.00  
29.00    28.07  
BCM Chip         48.10  0    10   14    75    80    95    45.70  
49.60    48.48
```

```
BCM Chip Internal Temperature
```

```
-----  
TEMP MONITOR      CURRENT TEMP      PEAK TEMP  
                  (Degree C)      (Degree C)  
-----  
1                48.10          49.10  
2                48.10          50.10  
3                42.70          45.20  
4                47.70          50.60
```

Transceiver

This platform type displays transceiver presence status and the supported list of transceivers.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```
<filter type="subtree">  
  <components xmlns="http://openconfig.net/yang/platform">  
    <component>  
      <state>  
        <type>oc-platform-types:TRANSCEIVER</type>  
      </state>  
    <transceiver/>  
  </component>  
</components>  
</filter>
```

Get OpenConfig return

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-1</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-1</id>
      <name>SFP-1</name>
      <parent>PORT-xe1</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>1</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <date-code>150908</date-code>
        <serial-no>CN0V250M58V91KC </serial-no>
        <vendor-rev>C </vendor-rev>
        <vendor-part>616740001 </vendor-part>
        <vendor>Amphenol </vendor>
        <connector-type>ipi-oc-transport-types-
deviations:COPPER_PIGTAIL_CONNECTOR</connector-type>
        <form-factor>oc-opt-types:SFP_PLUS</form-factor>
        <present>PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-2</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-2</id>
      <name>SFP-2</name>
      <parent>PORT-xe2</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
```

```

    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>2</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <date-code>151119</date-code>
      <serial-no>CN0V250M5BB2NMD </serial-no>
      <vendor-rev>C </vendor-rev>
      <vendor-part>616740001 </vendor-part>
      <vendor>Amphenol </vendor>
      <connector-type>ipi-oc-transport-types-
deviations:COPPER_PIGTAIL_CONNECTOR</connector-type>
      <form-factor>oc-opt-types:SFP_PLUS</form-factor>
      <present>PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>SFP-3</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>SFP-3</id>
    <name>SFP-3</name>
    <parent>PORT-xe3</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>3</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <date-code>151119</date-code>
      <serial-no>CN0V250M5BB2NEE </serial-no>
      <vendor-rev>C </vendor-rev>
      <vendor-part>616740001 </vendor-part>
      <vendor>Amphenol </vendor>
      <connector-type>ipi-oc-transport-types-
deviations:COPPER_PIGTAIL_CONNECTOR</connector-type>
      <form-factor>oc-opt-types:SFP_PLUS</form-factor>

```

```

        <present>PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-4</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-4</id>
      <name>SFP-4</name>
      <parent>PORT-xe4</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>4</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <date-code>150907</date-code>
        <serial-no>CN0V250M58V91K9 </serial-no>
        <vendor-rev>C </vendor-rev>
        <vendor-part>616740001 </vendor-part>
        <vendor>Amphenol </vendor>
        <connector-type>ipi-oc-transport-types-
deviations:COPPER_PIGTAIL_CONNECTOR</connector-type>
        <form-factor>oc-opt-types:SFP_PLUS</form-factor>
        <present>PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-5</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-5</id>
      <name>SFP-5</name>
      <parent>PORT-xe5</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>

```

```

    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>5</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-6</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-6</id>
      <name>SFP-6</name>
      <parent>PORT-xe6</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>6</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <date-code>150908</date-code>
        <serial-no>CN0V250M58V920E </serial-no>
        <vendor-rev>C </vendor-rev>
        <vendor-part>616740001 </vendor-part>
        <vendor>Amphenol </vendor>
        <connector-type>ipi-oc-transport-types-
deviations:COPPER_PIGTAIL_CONNECTOR</connector-type>
        <form-factor>oc-opt-types:SFP_PLUS</form-factor>
        <present>PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-7</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">

```

```

    <id>SFP-7</id>
    <name>SFP-7</name>
    <parent>PORT-xe7</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>7</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>SFP-8</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>SFP-8</id>
    <name>SFP-8</name>
    <parent>PORT-xe8</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>8</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">

```

```

    <name>SFP-9</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-9</id>
      <name>SFP-9</name>
      <parent>PORT-xe9</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>9</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-10</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-10</id>
      <name>SFP-10</name>
      <parent>PORT-xe10</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>10</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <date-code>161221</date-code>
        <serial-no>J11836008016    </serial-no>
        <vendor-rev>01    </vendor-rev>

```

```

        <vendor-part>ET5402-DAC-3M    </vendor-part>
        <vendor>Edgecore             </vendor>
        <connector-type>ipi-oc-transport-types-
deviations:COPPER_PIGTAIL_CONNECTOR</connector-type>
        <form-factor>oc-opt-types:SFP_PLUS</form-factor>
        <present>PRESENT</present>
    </state>
</transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-11</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
        <id>SFP-11</id>
        <name>SFP-11</name>
        <parent>PORT-xe11</parent>
        <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>11</location>
        <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
        <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
            <date-code>100101</date-code>
            <serial-no>NCI80T1328    </serial-no>
            <vendor-rev>1.0 </vendor-rev>
            <vendor-part>SFP-T        </vendor-part>
            <vendor>OEM                </vendor>
            <ethernet-pmd>ipi-oc-transport-types-deviations:ETH_1000BASE_T</
ethernet-pmd>
            <connector-type>oc-opt-types:LC_CONNECTOR</connector-type>
            <form-factor>oc-opt-types:SFP_PLUS</form-factor>
            <present>PRESENT</present>
        </state>
    </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-12</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
        <id>SFP-12</id>
        <name>SFP-12</name>
        <parent>PORT-xe12</parent>

```



```

    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>12</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>SFP-13</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>SFP-13</id>
    <name>SFP-13</name>
    <parent>PORT-xe13</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>13</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>SFP-14</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">

```

```

    <id>SFP-14</id>
    <name>SFP-14</name>
    <parent>PORT-xel4</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>14</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>SFP-15</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>SFP-15</id>
    <name>SFP-15</name>
    <parent>PORT-xel5</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>15</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">

```

```

    <name>SFP-16</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-16</id>
      <name>SFP-16</name>
      <parent>PORT-xe16</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>16</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-17</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-17</id>
      <name>SFP-17</name>
      <parent>PORT-xe17</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>17</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>

```

```

    </component>
    <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
      <name>SFP-18</name>
      <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
        <id>SFP-18</id>
        <name>SFP-18</name>
        <parent>PORT-xel8</parent>
        <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>18</location>
        <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
      </state>
      <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
        <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
          <present>NOT_PRESENT</present>
        </state>
      </transceiver>
    </component>
    <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
      <name>SFP-19</name>
      <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
        <id>SFP-19</id>
        <name>SFP-19</name>
        <parent>PORT-xel9</parent>
        <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>19</location>
        <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
      </state>
      <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
        <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">

```

```

        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-20</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-20</id>
      <name>SFP-20</name>
      <parent>PORT-xe20</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>20</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-21</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-21</id>
      <name>SFP-21</name>
      <parent>PORT-xe21</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>21</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
  </component>

```

```

    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-22</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-22</id>
      <name>SFP-22</name>
      <parent>PORT-xe22</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>22</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-23</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-23</id>
      <name>SFP-23</name>
      <parent>PORT-xe23</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>23</location>

```

```

    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-24</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-24</id>
      <name>SFP-24</name>
      <parent>PORT-xe24</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>24</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-25</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-25</id>
      <name>SFP-25</name>
      <parent>PORT-xe25</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>

```

```

        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>25</location>
        <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
        <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
            <present>NOT_PRESENT</present>
        </state>
    </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-26</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
        <id>SFP-26</id>
        <name>SFP-26</name>
        <parent>PORT-xe26</parent>
        <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>26</location>
        <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
        <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
            <present>NOT_PRESENT</present>
        </state>
    </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-27</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
        <id>SFP-27</id>
        <name>SFP-27</name>
        <parent>PORT-xe27</parent>
        <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>

```



```

    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>27</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>SFP-28</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>SFP-28</id>
    <name>SFP-28</name>
    <parent>PORT-xe28</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>28</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>SFP-29</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>SFP-29</id>
    <name>SFP-29</name>
    <parent>PORT-xe29</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>

```

```

    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>29</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>SFP-30</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>SFP-30</id>
    <name>SFP-30</name>
    <parent>PORT-xe30</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>30</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>SFP-31</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>SFP-31</id>
    <name>SFP-31</name>
    <parent>PORT-xe31</parent>

```

```

    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>31</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>SFP-32</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>SFP-32</id>
    <name>SFP-32</name>
    <parent>PORT-xe32</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>32</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>SFP-33</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">

```

```

    <id>SFP-33</id>
    <name>SFP-33</name>
    <parent>PORT-xe33</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>33</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>SFP-34</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>SFP-34</id>
    <name>SFP-34</name>
    <parent>PORT-xe34</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>34</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">

```

```

    <name>SFP-35</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-35</id>
      <name>SFP-35</name>
      <parent>PORT-xe35</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>35</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-36</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-36</id>
      <name>SFP-36</name>
      <parent>PORT-xe36</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>36</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>

```

```

    </component>
    <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
      <name>SFP-37</name>
      <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
        <id>SFP-37</id>
        <name>SFP-37</name>
        <parent>PORT-xe37</parent>
        <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>37</location>
        <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
      </state>
      <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
        <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
          <present>NOT_PRESENT</present>
        </state>
      </transceiver>
    </component>
    <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
      <name>SFP-38</name>
      <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
        <id>SFP-38</id>
        <name>SFP-38</name>
        <parent>PORT-xe38</parent>
        <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>38</location>
        <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
      </state>
      <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
        <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">

```

```

        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-39</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-39</id>
      <name>SFP-39</name>
      <parent>PORT-xe39</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>39</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-40</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-40</id>
      <name>SFP-40</name>
      <parent>PORT-xe40</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>40</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
  </component>

```

```

    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-41</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-41</id>
      <name>SFP-41</name>
      <parent>PORT-xe41</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>41</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-42</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-42</id>
      <name>SFP-42</name>
      <parent>PORT-xe42</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>42</location>

```



```

    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-43</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-43</id>
      <name>SFP-43</name>
      <parent>PORT-xe43</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>43</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
        <present>NOT_PRESENT</present>
      </state>
    </transceiver>
  </component>
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-44</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>SFP-44</id>
      <name>SFP-44</name>
      <parent>PORT-xe44</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>

```

```

        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>44</location>
        <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
        <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
            <present>NOT_PRESENT</present>
        </state>
    </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-45</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
        <id>SFP-45</id>
        <name>SFP-45</name>
        <parent>PORT-xe45</parent>
        <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>45</location>
        <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
        <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
            <present>NOT_PRESENT</present>
        </state>
    </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>SFP-46</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
        <id>SFP-46</id>
        <name>SFP-46</name>
        <parent>PORT-xe46</parent>
        <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>

```

```

    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>46</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>SFP-47</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>SFP-47</id>
    <name>SFP-47</name>
    <parent>PORT-xe47</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>47</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>SFP-48</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>SFP-48</id>
    <name>SFP-48</name>
    <parent>PORT-xe48</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>

```

```

    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>48</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <present>NOT_PRESENT</present>
    </state>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>QSFP-49</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>QSFP-49</id>
    <name>QSFP-49</name>
    <parent>PORT-ce49</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>49</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <date-code>150727</date-code>
      <serial-no>CN05NP8R57Q7T6J </serial-no>
      <vendor-rev>C </vendor-rev>
      <vendor-part>616750001 </vendor-part>
      <vendor>Amphenol </vendor>
      <ethernet-pmd>oc-opt-types:ETH_40GBASE_CR4</ethernet-pmd>
      <connector-type>ipi-oc-transport-types-
deviations:NO_SEPARABLE_CONNECTOR</connector-type>
      <form-factor>oc-opt-types:QSFP_PLUS</form-factor>
      <present>PRESENT</present>
    </state>
  </transceiver>
</component>

```

```

    <physical-channels xmlns="http://openconfig.net/yang/platform/
transceiver">
    <channel>
    <index>1</index>
    <state>
    <index>1</index>
    <laser-bias-current xmlns="http://openconfig.net/yang/platform/
transceiver">
    <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
    </laser-bias-current>
    <output-power xmlns="http://openconfig.net/yang/platform/
transceiver">
    <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
    </output-power>
    <input-power xmlns="http://openconfig.net/yang/platform/
transceiver">
    <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
    </input-power>
    </state>
    </channel>
    <channel>
    <index>2</index>
    <state>
    <index>2</index>
    <laser-bias-current xmlns="http://openconfig.net/yang/platform/
transceiver">
    <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
    </laser-bias-current>
    <output-power xmlns="http://openconfig.net/yang/platform/
transceiver">
    <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
    </output-power>
    <input-power xmlns="http://openconfig.net/yang/platform/
transceiver">
    <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
    </input-power>
    </state>
    </channel>
    <channel>
    <index>3</index>
    <state>
    <index>3</index>
    <laser-bias-current xmlns="http://openconfig.net/yang/platform/
transceiver">
    <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
    </laser-bias-current>
    <output-power xmlns="http://openconfig.net/yang/platform/
transceiver">
    <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
    </output-power>
    <input-power xmlns="http://openconfig.net/yang/platform/
transceiver">

```

```

        <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
        </input-power>
    </state>
</channel>
<channel>
    <index>4</index>
    <state>
        <index>4</index>
        <laser-bias-current xmlns="http://openconfig.net/yang/platform/
transceiver">
            <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
            </laser-bias-current>
            <output-power xmlns="http://openconfig.net/yang/platform/
transceiver">
                <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
                </output-power>
                <input-power xmlns="http://openconfig.net/yang/platform/
transceiver">
                    <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
                    </input-power>
                    </state>
                </channel>
            </physical-channels>
        </transceiver>
    </component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>QSFP-50</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
        <id>QSFP-50</id>
        <name>QSFP-50</name>
        <parent>PORT-ce50</parent>
        <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>50</location>
        <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
        <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
            <present>NOT_PRESENT</present>
        </state>

```

```

    <physical-channels xmlns="http://openconfig.net/yang/platform/
transceiver">
      <channel>
        <index>1</index>
      </channel>
      <channel>
        <index>2</index>
      </channel>
      <channel>
        <index>3</index>
      </channel>
      <channel>
        <index>4</index>
      </channel>
    </physical-channels>
  </transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
  <name>QSFP-51</name>
  <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
    <id>QSFP-51</id>
    <name>QSFP-51</name>
    <parent>PORT-ce51</parent>
    <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>51</location>
    <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
  </state>
  <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
    <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
      <date-code>170628</date-code>
      <serial-no>J11836008038    </serial-no>
      <vendor-rev>01</vendor-rev>
      <vendor-part>ET7402-100DAC-1M</vendor-part>
      <vendor>Edgecore    </vendor>
      <ethernet-pmd>oc-opt-types:ETH_100GBASE_CR4</ethernet-pmd>
      <connector-type>ipi-oc-transport-types-
deviations:NO_SEPARABLE_CONNECTOR</connector-type>
      <form-factor>oc-opt-types:QSFP28</form-factor>
      <present>PRESENT</present>
    </state>
    <physical-channels xmlns="http://openconfig.net/yang/platform/
transceiver">
      <channel>

```

```

        <index>1</index>
        <state>
            <index>1</index>
            <laser-bias-current xmlns="http://openconfig.net/yang/platform/
transceiver">
                <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
            </laser-bias-current>
            <output-power xmlns="http://openconfig.net/yang/platform/
transceiver">
                <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
            </output-power>
            <input-power xmlns="http://openconfig.net/yang/platform/
transceiver">
                <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
            </input-power>
        </state>
    </channel>
    <channel>
        <index>2</index>
        <state>
            <index>2</index>
            <laser-bias-current xmlns="http://openconfig.net/yang/platform/
transceiver">
                <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
            </laser-bias-current>
            <output-power xmlns="http://openconfig.net/yang/platform/
transceiver">
                <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
            </output-power>
            <input-power xmlns="http://openconfig.net/yang/platform/
transceiver">
                <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
            </input-power>
        </state>
    </channel>
    <channel>
        <index>3</index>
        <state>
            <index>3</index>
            <laser-bias-current xmlns="http://openconfig.net/yang/platform/
transceiver">
                <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
            </laser-bias-current>
            <output-power xmlns="http://openconfig.net/yang/platform/
transceiver">
                <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
            </output-power>
            <input-power xmlns="http://openconfig.net/yang/platform/
transceiver">
                <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
            </input-power>

```



```

        </state>
      </channel>
    <channel>
      <index>4</index>
      <state>
        <index>4</index>
        <laser-bias-current xmlns="http://openconfig.net/yang/platform/
transceiver">
          <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
          </laser-bias-current>
          <output-power xmlns="http://openconfig.net/yang/platform/
transceiver">
            <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
            </output-power>
            <input-power xmlns="http://openconfig.net/yang/platform/
transceiver">
              <instant xmlns:oc-types="http://openconfig.net/yang/
openconfig-types">0.000</instant>
              </input-power>
            </state>
          </channel>
        </physical-channels>
      </transceiver>
    </component>
    <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
      <name>QSFP-52</name>
      <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
        <id>QSFP-52</id>
        <name>QSFP-52</name>
        <parent>PORT-ce52</parent>
        <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>52</location>
        <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
      </state>
      <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
        <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
          <present>NOT_PRESENT</present>
        </state>
        <physical-channels xmlns="http://openconfig.net/yang/platform/
transceiver">
          <channel>
            <index>1</index>

```

```

        </channel>
        <channel>
            <index>2</index>
        </channel>
        <channel>
            <index>3</index>
        </channel>
        <channel>
            <index>4</index>
        </channel>
    </physical-channels>
</transceiver>
</component>
<component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>QSFP-53</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
        <id>QSFP-53</id>
        <name>QSFP-53</name>
        <parent>PORT-ce53</parent>
        <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>53</location>
        <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
    </state>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
        <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
            <present>NOT_PRESENT</present>
        </state>
        <physical-channels xmlns="http://openconfig.net/yang/platform/
transceiver">
            <channel>
                <index>1</index>
            </channel>
            <channel>
                <index>2</index>
            </channel>
            <channel>
                <index>3</index>
            </channel>
            <channel>
                <index>4</index>
            </channel>
        </physical-channels>
    </transceiver>

```

```

    </component>
    <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
      <name>QSFP-54</name>
      <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
        <id>QSFP-54</id>
        <name>QSFP-54</name>
        <parent>PORT-ce54</parent>
        <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>54</location>
        <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:TRANSCEIVER</type>
      </state>
      <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
        <state xmlns:ipi-oc-transport-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-transport-types-deviations">
          <present>NOT_PRESENT</present>
        </state>
        <physical-channels xmlns="http://openconfig.net/yang/platform/
transceiver">
          <channel>
            <index>1</index>
          </channel>
          <channel>
            <index>2</index>
          </channel>
          <channel>
            <index>3</index>
          </channel>
          <channel>
            <index>4</index>
          </channel>
        </physical-channels>
      </transceiver>
    </component>
  </components>

```

OcNOS get result

Here is the NetConf response in IPI datamodel representation.

```

<components xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <component>
    <name>SFP-1</name>
    <state>
      <name>SFP-1</name>
    </state>
  </component>
</components>

```

```

    <parent>PORT-xe1</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>1</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <ddm-type>no</ddm-type>
      <vendor-manufacturing-date>150908 </vendor-manufacturing-date>
      <vendor-serial-number>CN0V250M58V91KC </vendor-serial-number>
      <minimum-signalling-rate>0</minimum-signalling-rate>
      <maximum-signalling-rate>0</maximum-signalling-rate>
      <nominal-signalling-rate>103</nominal-signalling-rate>
      <extended-check-code>0x4d</extended-check-code>
      <check-code>0xdf</check-code>
      <vendor-revision-number>C </vendor-revision-number>
      <vendor-part-number>616740001 </vendor-part-number>
      <vendor-ieee-id>0x78 0xa7 0x14</vendor-ieee-id>
      <vendor-name>Amphenol </vendor-name>
      <om4-link-length>1</om4-link-length>
      <om3-link-length>0</om3-link-length>
      <om2-link-length>0</om2-link-length>
      <om1-link-length>0</om1-link-length>
      <link-length-meter>0</link-length-meter>
      <link-length-kilometer>0</link-length-kilometer>
      <serial-encoding-algorithm>enc-undefined</serial-encoding-
algorithm>
      <fiber-channel-transmission-media>twinaxial-pair</fiber-channel-
transmission-media>
      <fiber-channel-transmission-technology>electricalInter-Enclosure
electricalIntra-Enclosure</fiber-channel-transmission-technology>
      <fiber-channel-link-length>short</fiber-channel-link-length>
      <connector-type>copper-pigtail</connector-type>
      <transceiver-identifier>sfp-or-sfpplus-or-sfp28</transceiver-
identifier>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Present</presence>
      <port-no>1</port-no>
    </state>
  </sfp>
  <state>
    <sfp-plus-cable-technology>passive</sfp-plus-cable-technology>
    <sfp-infiniband-compliance-code>ibc-1xcopperpassive</sfp-
infiniband-compliance-code>
    <fiber-channel-sfp-speed>fcs-800mbps fcs-400mbps fcs-200mbps fcs-
100mbps</fiber-channel-sfp-speed>
    <sfp-options-implemented>power-level1</sfp-options-implemented>

```

```

        <sfp-identifier>gbic-or-sfp-definedby-twowire-interfaceid-only</
sfp-identifier>
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>on</transmit-status>
    </state>
</sfp>
</transceiver>
</component>
<component>
    <name>SFP-2</name>
    <state>
        <name>SFP-2</name>
        <parent>PORT-xe2</parent>
        <product-name>NA</product-name>
        <oper-status>NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>2</location>
        <type>transceiver</type>
    </state>
    <transceiver>
        <state>
            <ddm-type>no</ddm-type>
            <vendor-manufacturing-date>151119    </vendor-manufacturing-date>
            <vendor-serial-number>CN0V250M5BB2NMD </vendor-serial-number>
            <minimum-signalling-rate>0</minimum-signalling-rate>
            <maximum-signalling-rate>0</maximum-signalling-rate>
            <nominal-signalling-rate>103</nominal-signalling-rate>
            <extended-check-code>0x57</extended-check-code>
            <check-code>0xdf</check-code>
            <vendor-revision-number>C    </vendor-revision-number>
            <vendor-part-number>616740001    </vendor-part-number>
            <vendor-ieee-id>0x78 0xa7 0x14</vendor-ieee-id>
            <vendor-name>Amphenol    </vendor-name>
            <om4-link-length>1</om4-link-length>
            <om3-link-length>0</om3-link-length>
            <om2-link-length>0</om2-link-length>
            <om1-link-length>0</om1-link-length>
            <link-length-meter>0</link-length-meter>
            <link-length-kilometer>0</link-length-kilometer>
            <serial-encoding-algorithm>enc-unspecified</serial-encoding-
algorithm>
            <fiber-channel-transmission-media>twinaxial-pair</fiber-channel-
transmission-media>
            <fiber-channel-transmission-technology>electricalInter-Enclosure
electricalIntra-Enclosure</fiber-channel-transmission-technology>
            <fiber-channel-link-length>short</fiber-channel-link-length>
            <connector-type>copper-pigtail</connector-type>
            <transceiver-identifier>sfp-or-sfpplus-or-sfp28</transceiver-
identifier>
            <channel-count>1</channel-count>
            <type>sfp</type>

```

```

        <presence>Present</presence>
        <port-no>2</port-no>
    </state>
    <sfp>
        <state>
            <sfp-plus-cable-technology>passive</sfp-plus-cable-technology>
            <sfp-infiniband-compliance-code>ibc-1xcopperpassive</sfp-
infiniband-compliance-code>
            <fiber-channel-sfp-speed>fcs-800mbps fcs-400mbps fcs-200mbps fcs-
100mbps</fiber-channel-sfp-speed>
            <sfp-options-implemented>power-level1</sfp-options-implemented>
            <sfp-identifier>gbic-or-sfp-definedby-twowire-interfaceid-only</
sfp-identifier>
            <recieve-loss-status>NA</recieve-loss-status>
            <transmit-status>on</transmit-status>
        </state>
    </sfp>
</transceiver>
</component>
<component>
    <name>SFP-3</name>
    <state>
        <name>SFP-3</name>
        <parent>PORT-xe3</parent>
        <product-name>NA</product-name>
        <oper-status>NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>3</location>
        <type>transceiver</type>
    </state>
    <transceiver>
        <state>
            <ddm-type>no</ddm-type>
            <vendor-manufacturing-date>151119 </vendor-manufacturing-date>
            <vendor-serial-number>CN0V250M5BB2NEE </vendor-serial-number>
            <minimum-signalling-rate>0</minimum-signalling-rate>
            <maximum-signalling-rate>0</maximum-signalling-rate>
            <nominal-signalling-rate>103</nominal-signalling-rate>
            <extended-check-code>0x50</extended-check-code>
            <check-code>0xdf</check-code>
            <vendor-revision-number>C </vendor-revision-number>
            <vendor-part-number>616740001 </vendor-part-number>
            <vendor-ieee-id>0x78 0xa7 0x14</vendor-ieee-id>
            <vendor-name>Amphenol </vendor-name>
            <om4-link-length>1</om4-link-length>
            <om3-link-length>0</om3-link-length>
            <om2-link-length>0</om2-link-length>
            <om1-link-length>0</om1-link-length>
            <link-length-meter>0</link-length-meter>
            <link-length-kilometer>0</link-length-kilometer>

```

```

        <serial-encoding-algorithm>enc-unspecified</serial-encoding-
algorithm>
        <fiber-channel-transmission-media>twinaxial-pair</fiber-channel-
transmission-media>
        <fiber-channel-transmission-technology>electricalInter-Enclosure
electricalIntra-Enclosure</fiber-channel-transmission-technology>
        <fiber-channel-link-length>short</fiber-channel-link-length>
        <connector-type>copper-pigtail</connector-type>
        <transceiver-identifier>sfp-or-sfpplus-or-sfp28</transceiver-
identifier>
        <channel-count>1</channel-count>
        <type>sfp</type>
        <presence>Present</presence>
        <port-no>3</port-no>
    </state>
    <sfp>
        <state>
            <sfp-plus-cable-technology>passive</sfp-plus-cable-technology>
            <sfp-infiniband-compliance-code>ibc-lxcopperpassive</sfp-
infiniband-compliance-code>
            <fiber-channel-sfp-speed>fcs-800mbps fcs-400mbps fcs-200mbps fcs-
100mbps</fiber-channel-sfp-speed>
            <sfp-options-implemented>power-level1</sfp-options-implemented>
            <sfp-identifier>gbic-or-sfp-definedby-twowire-interfaceid-only</
sfp-identifier>
            <recieve-loss-status>NA</recieve-loss-status>
            <transmit-status>on</transmit-status>
        </state>
    </sfp>
</transceiver>
</component>
<component>
    <name>SFP-4</name>
    <state>
        <name>SFP-4</name>
        <parent>PORT-xe4</parent>
        <product-name>NA</product-name>
        <oper-status>NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>4</location>
        <type>transceiver</type>
    </state>
    <transceiver>
        <state>
            <ddm-type>no</ddm-type>
            <vendor-manufacturing-date>150907 </vendor-manufacturing-date>
            <vendor-serial-number>CN0V250M58V91K9 </vendor-serial-number>
            <minimum-signalling-rate>0</minimum-signalling-rate>
            <maximum-signalling-rate>0</maximum-signalling-rate>
            <nominal-signalling-rate>103</nominal-signalling-rate>
            <extended-check-code>0x42</extended-check-code>

```

```

    <check-code>0xdf</check-code>
    <vendor-revision-number>C    </vendor-revision-number>
    <vendor-part-number>616740001    </vendor-part-number>
    <vendor-ieee-id>0x78 0xa7 0x14</vendor-ieee-id>
    <vendor-name>Amphenol    </vendor-name>
    <om4-link-length>1</om4-link-length>
    <om3-link-length>0</om3-link-length>
    <om2-link-length>0</om2-link-length>
    <om1-link-length>0</om1-link-length>
    <link-length-meter>0</link-length-meter>
    <link-length-kilometer>0</link-length-kilometer>
    <serial-encoding-algorithm>enc-undefined</serial-encoding-
algorithm>
    <fiber-channel-transmission-media>twinaxial-pair</fiber-channel-
transmission-media>
    <fiber-channel-transmission-technology>electricalInter-Enclosure
electricalIntra-Enclosure</fiber-channel-transmission-technology>
    <fiber-channel-link-length>short</fiber-channel-link-length>
    <connector-type>copper-pigtail</connector-type>
    <transceiver-identifier>sfp-or-sfpplus-or-sfp28</transceiver-
identifier>
    <channel-count>1</channel-count>
    <type>sfp</type>
    <presence>Present</presence>
    <port-no>4</port-no>
  </state>
  <sfp>
    <state>
      <sfp-plus-cable-technology>passive</sfp-plus-cable-technology>
      <sfp-infiniband-compliance-code>ibc-1xcopperpassive</sfp-
infiniband-compliance-code>
      <fiber-channel-sfp-speed>fcs-800mbps fcs-400mbps fcs-200mbps fcs-
100mbps</fiber-channel-sfp-speed>
      <sfp-options-implemented>power-level1</sfp-options-implemented>
      <sfp-identifier>gbic-or-sfp-definedby-twowire-interfaceid-only</
sfp-identifier>
      <recieve-loss-status>NA</recieve-loss-status>
      <transmit-status>on</transmit-status>
    </state>
  </sfp>
</transceiver>
</component>
<component>
  <name>SFP-5</name>
  <state>
    <name>SFP-5</name>
    <parent>PORT-xe5</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>5</location>

```



```

    <type>transceiver</type>
  </state>
</transceiver>
<state>
  <channel-count>1</channel-count>
  <type>sfp</type>
  <presence>Not-Present</presence>
  <port-no>5</port-no>
</state>
<sfp>
  <state>
    <recieve-loss-status>NA</recieve-loss-status>
    <transmit-status>off</transmit-status>
  </state>
</sfp>
</transceiver>
</component>
<component>
  <name>SFP-6</name>
  <state>
    <name>SFP-6</name>
    <parent>PORT-xe6</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>6</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <ddm-type>no</ddm-type>
      <vendor-manufacturing-date>150908 </vendor-manufacturing-date>
      <vendor-serial-number>CN0V250M58V920E </vendor-serial-number>
      <minimum-signalling-rate>0</minimum-signalling-rate>
      <maximum-signalling-rate>0</maximum-signalling-rate>
      <nominal-signalling-rate>103</nominal-signalling-rate>
      <extended-check-code>0x35</extended-check-code>
      <check-code>0xdf</check-code>
      <vendor-revision-number>C </vendor-revision-number>
      <vendor-part-number>616740001 </vendor-part-number>
      <vendor-ieee-id>0x78 0xa7 0x14</vendor-ieee-id>
      <vendor-name>Amphenol </vendor-name>
      <om4-link-length>1</om4-link-length>
      <om3-link-length>0</om3-link-length>
      <om2-link-length>0</om2-link-length>
      <om1-link-length>0</om1-link-length>
      <link-length-meter>0</link-length-meter>
      <link-length-kilometer>0</link-length-kilometer>
      <serial-encoding-algorithm>enc-unspecified</serial-encoding-
algorithm>

```

```

        <fiber-channel-transmission-media>twinaxial-pair</fiber-channel-
transmission-media>
        <fiber-channel-transmission-technology>electricalIntra-Enclosure
electricalIntra-Enclosure</fiber-channel-transmission-technology>
        <fiber-channel-link-length>short</fiber-channel-link-length>
        <connector-type>copper-pigtail</connector-type>
        <transceiver-identifier>sfp-or-sfpplus-or-sfp28</transceiver-
identifier>
        <channel-count>1</channel-count>
        <type>sfp</type>
        <presence>Present</presence>
        <port-no>6</port-no>
    </state>
    <sfp>
        <state>
            <sfp-plus-cable-technology>passive</sfp-plus-cable-technology>
            <sfp-infiniband-compliance-code>ibc-lxcopperpassive</sfp-
infiniband-compliance-code>
            <fiber-channel-sfp-speed>fcs-800mbps fcs-400mbps fcs-200mbps fcs-
100mbps</fiber-channel-sfp-speed>
            <sfp-options-implemented>power-level1</sfp-options-implemented>
            <sfp-identifier>gbic-or-sfp-definedby-twowire-interfaceid-only</
sfp-identifier>
            <recieve-loss-status>NA</recieve-loss-status>
            <transmit-status>on</transmit-status>
        </state>
    </sfp>
</transceiver>
</component>
<component>
    <name>SFP-7</name>
    <state>
        <name>SFP-7</name>
        <parent>PORT-xe7</parent>
        <product-name>NA</product-name>
        <oper-status>NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>7</location>
        <type>transceiver</type>
    </state>
    <transceiver>
        <state>
            <channel-count>1</channel-count>
            <type>sfp</type>
            <presence>Not-Present</presence>
            <port-no>7</port-no>
        </state>
        <sfp>
            <state>
                <recieve-loss-status>NA</recieve-loss-status>
                <transmit-status>off</transmit-status>
            </state>
        </sfp>
    </transceiver>
</component>

```

```
        </state>
      </sfp>
    </transceiver>
  </component>
  <component>
    <name>SFP-8</name>
    <state>
      <name>SFP-8</name>
      <parent>PORT-xe8</parent>
      <product-name>NA</product-name>
      <oper-status>NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>8</location>
      <type>transceiver</type>
    </state>
  </transceiver>
  <state>
    <channel-count>1</channel-count>
    <type>sfp</type>
    <presence>Not-Present</presence>
    <port-no>8</port-no>
  </state>
</sfp>
</transceiver>
</component>
  <component>
    <name>SFP-9</name>
    <state>
      <name>SFP-9</name>
      <parent>PORT-xe9</parent>
      <product-name>NA</product-name>
      <oper-status>NA</oper-status>
      <removable>true</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>9</location>
      <type>transceiver</type>
    </state>
  </transceiver>
  <state>
```

```

        <channel-count>1</channel-count>
        <type>sfp</type>
        <presence>Not-Present</presence>
        <port-no>9</port-no>
    </state>
</sfp>
    <state>
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
    </state>
</sfp>
</transceiver>
</component>
<component>
    <name>SFP-10</name>
    <state>
        <name>SFP-10</name>
        <parent>PORT-xe10</parent>
        <product-name>NA</product-name>
        <oper-status>NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>10</location>
        <type>transceiver</type>
    </state>
    <transceiver>
        <state>
            <ddm-type>no</ddm-type>
            <vendor-manufacturing-date>161221    </vendor-manufacturing-date>
            <vendor-serial-number>J11836008016    </vendor-serial-number>
            <minimum-signalling-rate>0</minimum-signalling-rate>
            <maximum-signalling-rate>0</maximum-signalling-rate>
            <nominal-signalling-rate>103</nominal-signalling-rate>
            <extended-check-code>0x69</extended-check-code>
            <check-code>0x6d</check-code>
            <vendor-revision-number>01    </vendor-revision-number>
            <vendor-part-number>ET5402-DAC-3M    </vendor-part-number>
            <vendor-ieee-id>0x70 0x72 0xcf</vendor-ieee-id>
            <vendor-name>Edgecore    </vendor-name>
            <om4-link-length>3</om4-link-length>
            <om3-link-length>0</om3-link-length>
            <om2-link-length>0</om2-link-length>
            <om1-link-length>0</om1-link-length>
            <link-length-meter>0</link-length-meter>
            <link-length-kilometer>0</link-length-kilometer>
            <serial-encoding-algorithm>enc-unspecified</serial-encoding-
algorithm>
            <connector-type>copper-pigtail</connector-type>
            <transceiver-identifier>sfp-or-sfpplus-or-sfp28</transceiver-
identifier>
            <channel-count>1</channel-count>

```

```

        <type>sfp</type>
        <presence>Present</presence>
        <port-no>10</port-no>
    </state>
    <sfp>
        <state>
            <sfp-plus-cable-technology>passive</sfp-plus-cable-technology>
            <sfp-options-implemented>power-level1</sfp-options-implemented>
            <sfp-identifier>gbic-or-sfp-defined-by-two-wire-interface-id-only</
sfp-identifier>
            <receive-loss-status>NA</receive-loss-status>
            <transmit-status>on</transmit-status>
        </state>
    </sfp>
</transceiver>
</component>
<component>
    <name>SFP-11</name>
    <state>
        <name>SFP-11</name>
        <parent>PORT-xe11</parent>
        <product-name>NA</product-name>
        <oper-status>NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>11</location>
        <type>transceiver</type>
    </state>
    <transceiver>
        <state>
            <ddm-type>no</ddm-type>
            <vendor-manufacturing-date>100101 </vendor-manufacturing-date>
            <vendor-serial-number>NCI80T1328 </vendor-serial-number>
            <minimum-signalling-rate>0</minimum-signalling-rate>
            <maximum-signalling-rate>0</maximum-signalling-rate>
            <nominal-signalling-rate>13</nominal-signalling-rate>
            <extended-check-code>0x87</extended-check-code>
            <check-code>0x82</check-code>
            <vendor-revision-number>1.0 </vendor-revision-number>
            <vendor-part-number>SFP-T </vendor-part-number>
            <vendor-ieee-id>0x0 0x0 0x0</vendor-ieee-id>
            <vendor-name>OEM </vendor-name>
            <om4-link-length>100</om4-link-length>
            <om3-link-length>0</om3-link-length>
            <om2-link-length>0</om2-link-length>
            <om1-link-length>0</om1-link-length>
            <link-length-meter>0</link-length-meter>
            <link-length-kilometer>0</link-length-kilometer>
            <serial-encoding-algorithm>enc-8b-or-10b</serial-encoding-algorithm>
            <ethernet-compliance-code>ec-1000base-t</ethernet-compliance-code>
            <connector-type>lucent-connector</connector-type>

```

```

        <transceiver-identifier>sfp-or-sfpplus-or-sfp28</transceiver-
identifier>
        <channel-count>1</channel-count>
        <type>sfp</type>
        <presence>Present</presence>
        <port-no>11</port-no>
    </state>
    <sfp>
        <state>
            <sfp-options-implemented>power-level1</sfp-options-implemented>
            <sfp-identifier>gbic-or-sfp-definedby-twowire-interfaceid-only</
sfp-identifier>
            <recieve-loss-status>on</recieve-loss-status>
            <transmit-status>on</transmit-status>
        </state>
    </sfp>
</transceiver>
</component>
<component>
    <name>SFP-12</name>
    <state>
        <name>SFP-12</name>
        <parent>PORT-xe12</parent>
        <product-name>NA</product-name>
        <oper-status>NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>12</location>
        <type>transceiver</type>
    </state>
    <transceiver>
        <state>
            <channel-count>1</channel-count>
            <type>sfp</type>
            <presence>Not-Present</presence>
            <port-no>12</port-no>
        </state>
        <sfp>
            <state>
                <recieve-loss-status>NA</recieve-loss-status>
                <transmit-status>off</transmit-status>
            </state>
        </sfp>
    </transceiver>
</component>
<component>
    <name>SFP-13</name>
    <state>
        <name>SFP-13</name>
        <parent>PORT-xe13</parent>
        <product-name>NA</product-name>

```

```

    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>13</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>13</port-no>
    </state>
    <sfp>
      <state>
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
      </state>
    </sfp>
  </transceiver>
</component>
<component>
  <name>SFP-14</name>
  <state>
    <name>SFP-14</name>
    <parent>PORT-xe14</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>14</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>14</port-no>
    </state>
    <sfp>
      <state>
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
      </state>

```

```

    </sfp>
  </transceiver>
</component>
<component>
  <name>SFP-15</name>
  <state>
    <name>SFP-15</name>
    <parent>PORT-xe15</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>15</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>15</port-no>
    </state>
  </sfp>
  <state>
    <recieve-loss-status>NA</recieve-loss-status>
    <transmit-status>off</transmit-status>
  </state>
</transceiver>
</component>
<component>
  <name>SFP-16</name>
  <state>
    <name>SFP-16</name>
    <parent>PORT-xe16</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>16</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>

```



```

        <type>sfp</type>
        <presence>Not-Present</presence>
        <port-no>16</port-no>
    </state>
</sfp>
    <state>
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
    </state>
</sfp>
</transceiver>
</component>
<component>
    <name>SFP-17</name>
    <state>
        <name>SFP-17</name>
        <parent>PORT-xe17</parent>
        <product-name>NA</product-name>
        <oper-status>NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>17</location>
        <type>transceiver</type>
    </state>
<transceiver>
    <state>
        <channel-count>1</channel-count>
        <type>sfp</type>
        <presence>Not-Present</presence>
        <port-no>17</port-no>
    </state>
    <sfp>
        <state>
            <recieve-loss-status>NA</recieve-loss-status>
            <transmit-status>off</transmit-status>
        </state>
    </sfp>
</transceiver>
</component>
<component>
    <name>SFP-18</name>
    <state>
        <name>SFP-18</name>
        <parent>PORT-xe18</parent>
        <product-name>NA</product-name>
        <oper-status>NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>

```

```

    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>18</location>
    <type>transceiver</type>
  </state>
</transceiver>
<transceiver>
  <state>
    <channel-count>1</channel-count>
    <type>sfp</type>
    <presence>Not-Present</presence>
    <port-no>18</port-no>
  </state>
  <sfp>
    <state>
      <recieve-loss-status>NA</recieve-loss-status>
      <transmit-status>off</transmit-status>
    </state>
  </sfp>
</transceiver>
</component>
<component>
  <name>SFP-19</name>
  <state>
    <name>SFP-19</name>
    <parent>PORT-xe19</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>19</location>
    <type>transceiver</type>
  </state>
</transceiver>
<transceiver>
  <state>
    <channel-count>1</channel-count>
    <type>sfp</type>
    <presence>Not-Present</presence>
    <port-no>19</port-no>
  </state>
  <sfp>
    <state>
      <recieve-loss-status>NA</recieve-loss-status>
      <transmit-status>off</transmit-status>
    </state>
  </sfp>
</transceiver>
</component>
<component>
  <name>SFP-20</name>
  <state>

```

```
<name>SFP-20</name>
<parent>PORT-xe20</parent>
<product-name>NA</product-name>
<oper-status>NA</oper-status>
<removable>true</removable>
<part-no>NA</part-no>
<serial-no>NA</serial-no>
<software-version>NA</software-version>
<firmware-version>NA</firmware-version>
<hardware-version>NA</hardware-version>
<description>NA</description>
<mfg-name>NA</mfg-name>
<location>20</location>
<type>transceiver</type>
</state>
<transceiver>
  <state>
    <channel-count>1</channel-count>
    <type>sfp</type>
    <presence>Not-Present</presence>
    <port-no>20</port-no>
  </state>
  <sfp>
    <state>
      <recieve-loss-status>NA</recieve-loss-status>
      <transmit-status>off</transmit-status>
    </state>
  </sfp>
</transceiver>
</component>
<component>
  <name>SFP-21</name>
  <state>
    <name>SFP-21</name>
    <parent>PORT-xe21</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>21</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>21</port-no>
    </state>
    <sfp>
      <state>
```

```
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
    </state>
</sfp>
</transceiver>
</component>
<component>
    <name>SFP-22</name>
    <state>
        <name>SFP-22</name>
        <parent>PORT-xe22</parent>
        <product-name>NA</product-name>
        <oper-status>NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>22</location>
        <type>transceiver</type>
    </state>
    <transceiver>
        <state>
            <channel-count>1</channel-count>
            <type>sfp</type>
            <presence>Not-Present</presence>
            <port-no>22</port-no>
        </state>
        <sfp>
            <state>
                <recieve-loss-status>NA</recieve-loss-status>
                <transmit-status>off</transmit-status>
            </state>
        </sfp>
    </transceiver>
</component>
<component>
    <name>SFP-23</name>
    <state>
        <name>SFP-23</name>
        <parent>PORT-xe23</parent>
        <product-name>NA</product-name>
        <oper-status>NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>23</location>
        <type>transceiver</type>
    </state>
```

```
<transceiver>
  <state>
    <channel-count>1</channel-count>
    <type>sfp</type>
    <presence>Not-Present</presence>
    <port-no>23</port-no>
  </state>
  <sfp>
    <state>
      <recieve-loss-status>NA</recieve-loss-status>
      <transmit-status>off</transmit-status>
    </state>
  </sfp>
</transceiver>
</component>
<component>
  <name>SFP-24</name>
  <state>
    <name>SFP-24</name>
    <parent>PORT-xe24</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>24</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>24</port-no>
    </state>
    <sfp>
      <state>
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
      </state>
    </sfp>
  </transceiver>
</component>
<component>
  <name>SFP-25</name>
  <state>
    <name>SFP-25</name>
    <parent>PORT-xe25</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
```

```
<serial-no>NA</serial-no>
<software-version>NA</software-version>
<firmware-version>NA</firmware-version>
<hardware-version>NA</hardware-version>
<description>NA</description>
<mfg-name>NA</mfg-name>
<location>25</location>
<type>transceiver</type>
</state>
<transceiver>
  <state>
    <channel-count>1</channel-count>
    <type>sfp</type>
    <presence>Not-Present</presence>
    <port-no>25</port-no>
  </state>
  <sfp>
    <state>
      <recieve-loss-status>NA</recieve-loss-status>
      <transmit-status>off</transmit-status>
    </state>
  </sfp>
</transceiver>
</component>
<component>
  <name>SFP-26</name>
  <state>
    <name>SFP-26</name>
    <parent>PORT-xe26</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>26</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>26</port-no>
    </state>
    <sfp>
      <state>
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
      </state>
    </sfp>
  </transceiver>
</component>
```

```
<component>
  <name>SFP-27</name>
  <state>
    <name>SFP-27</name>
    <parent>PORT-xe27</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>27</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>27</port-no>
    </state>
    <sfp>
      <state>
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
      </state>
    </sfp>
  </transceiver>
</component>
<component>
  <name>SFP-28</name>
  <state>
    <name>SFP-28</name>
    <parent>PORT-xe28</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>28</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>28</port-no>
```

```
</state>
<sfp>
  <state>
    <recieve-loss-status>NA</recieve-loss-status>
    <transmit-status>off</transmit-status>
  </state>
</sfp>
</transceiver>
</component>
<component>
  <name>SFP-29</name>
  <state>
    <name>SFP-29</name>
    <parent>PORT-xe29</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>29</location>
    <type>transceiver</type>
  </state>
<transceiver>
  <state>
    <channel-count>1</channel-count>
    <type>sfp</type>
    <presence>Not-Present</presence>
    <port-no>29</port-no>
  </state>
  <sfp>
    <state>
      <recieve-loss-status>NA</recieve-loss-status>
      <transmit-status>off</transmit-status>
    </state>
  </sfp>
</transceiver>
</component>
<component>
  <name>SFP-30</name>
  <state>
    <name>SFP-30</name>
    <parent>PORT-xe30</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
```



```

    <location>30</location>
    <type>transceiver</type>
  </state>
</transceiver>
<state>
  <channel-count>1</channel-count>
  <type>sfp</type>
  <presence>Not-Present</presence>
  <port-no>30</port-no>
</state>
<sfp>
  <state>
    <recieve-loss-status>NA</recieve-loss-status>
    <transmit-status>off</transmit-status>
  </state>
</sfp>
</transceiver>
</component>
<component>
  <name>SFP-31</name>
  <state>
    <name>SFP-31</name>
    <parent>PORT-xe31</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>31</location>
    <type>transceiver</type>
  </state>
<transceiver>
  <state>
    <channel-count>1</channel-count>
    <type>sfp</type>
    <presence>Not-Present</presence>
    <port-no>31</port-no>
  </state>
  <sfp>
    <state>
      <recieve-loss-status>NA</recieve-loss-status>
      <transmit-status>off</transmit-status>
    </state>
  </sfp>
</transceiver>
</component>
<component>
  <name>SFP-32</name>
  <state>
    <name>SFP-32</name>
    <parent>PORT-xe32</parent>
    <product-name>NA</product-name>

```

```

    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>32</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>32</port-no>
    </state>
    <sfp>
      <state>
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
      </state>
    </sfp>
  </transceiver>
</component>
<component>
  <name>SFP-33</name>
  <state>
    <name>SFP-33</name>
    <parent>PORT-xe33</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>33</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>33</port-no>
    </state>
    <sfp>
      <state>
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
      </state>

```

```

    </sfp>
  </transceiver>
</component>
<component>
  <name>SFP-34</name>
  <state>
    <name>SFP-34</name>
    <parent>PORT-xe34</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>34</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>34</port-no>
    </state>
  </sfp>
  <state>
    <recieve-loss-status>NA</recieve-loss-status>
    <transmit-status>off</transmit-status>
  </state>
</transceiver>
</component>
<component>
  <name>SFP-35</name>
  <state>
    <name>SFP-35</name>
    <parent>PORT-xe35</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>35</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>

```

```

        <type>sfp</type>
        <presence>Not-Present</presence>
        <port-no>35</port-no>
    </state>
</sfp>
    <state>
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
    </state>
</sfp>
</transceiver>
</component>
<component>
    <name>SFP-36</name>
    <state>
        <name>SFP-36</name>
        <parent>PORT-xe36</parent>
        <product-name>NA</product-name>
        <oper-status>NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>
        <hardware-version>NA</hardware-version>
        <description>NA</description>
        <mfg-name>NA</mfg-name>
        <location>36</location>
        <type>transceiver</type>
    </state>
    <transceiver>
        <state>
            <channel-count>1</channel-count>
            <type>sfp</type>
            <presence>Not-Present</presence>
            <port-no>36</port-no>
        </state>
        <sfp>
            <state>
                <recieve-loss-status>NA</recieve-loss-status>
                <transmit-status>off</transmit-status>
            </state>
        </sfp>
    </transceiver>
</component>
<component>
    <name>SFP-37</name>
    <state>
        <name>SFP-37</name>
        <parent>PORT-xe37</parent>
        <product-name>NA</product-name>
        <oper-status>NA</oper-status>
        <removable>true</removable>
        <part-no>NA</part-no>
        <serial-no>NA</serial-no>
        <software-version>NA</software-version>
        <firmware-version>NA</firmware-version>

```

```

    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>37</location>
    <type>transceiver</type>
  </state>
</transceiver>
<transceiver>
  <state>
    <channel-count>1</channel-count>
    <type>sfp</type>
    <presence>Not-Present</presence>
    <port-no>37</port-no>
  </state>
  <sfp>
    <state>
      <recieve-loss-status>NA</recieve-loss-status>
      <transmit-status>off</transmit-status>
    </state>
  </sfp>
</transceiver>
</component>
<component>
  <name>SFP-38</name>
  <state>
    <name>SFP-38</name>
    <parent>PORT-xe38</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>38</location>
    <type>transceiver</type>
  </state>
</transceiver>
<transceiver>
  <state>
    <channel-count>1</channel-count>
    <type>sfp</type>
    <presence>Not-Present</presence>
    <port-no>38</port-no>
  </state>
  <sfp>
    <state>
      <recieve-loss-status>NA</recieve-loss-status>
      <transmit-status>off</transmit-status>
    </state>
  </sfp>
</transceiver>
</component>
<component>
  <name>SFP-39</name>
  <state>

```

```

    <name>SFP-39</name>
    <parent>PORT-xe39</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>39</location>
    <type>transceiver</type>
  </state>
</transceiver>
  <state>
    <channel-count>1</channel-count>
    <type>sfp</type>
    <presence>Not-Present</presence>
    <port-no>39</port-no>
  </state>
</sfp>
</transceiver>
</component>
<component>
  <name>SFP-40</name>
  <state>
    <name>SFP-40</name>
    <parent>PORT-xe40</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>40</location>
    <type>transceiver</type>
  </state>
</transceiver>
  <state>
    <channel-count>1</channel-count>
    <type>sfp</type>
    <presence>Not-Present</presence>
    <port-no>40</port-no>
  </state>
</sfp>
</state>

```

```

        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
    </state>
</sfp>
</transceiver>
</component>
<component>
  <name>SFP-41</name>
  <state>
    <name>SFP-41</name>
    <parent>PORT-xe41</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>41</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>41</port-no>
    </state>
    <sfp>
      <state>
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
      </state>
    </sfp>
  </transceiver>
</component>
<component>
  <name>SFP-42</name>
  <state>
    <name>SFP-42</name>
    <parent>PORT-xe42</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>42</location>
    <type>transceiver</type>
  </state>

```

```
<transceiver>
  <state>
    <channel-count>1</channel-count>
    <type>sfp</type>
    <presence>Not-Present</presence>
    <port-no>42</port-no>
  </state>
  <sfp>
    <state>
      <recieve-loss-status>NA</recieve-loss-status>
      <transmit-status>off</transmit-status>
    </state>
  </sfp>
</transceiver>
</component>
<component>
  <name>SFP-43</name>
  <state>
    <name>SFP-43</name>
    <parent>PORT-xe43</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>43</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>43</port-no>
    </state>
    <sfp>
      <state>
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
      </state>
    </sfp>
  </transceiver>
</component>
<component>
  <name>SFP-44</name>
  <state>
    <name>SFP-44</name>
    <parent>PORT-xe44</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
```



```
<serial-no>NA</serial-no>
<software-version>NA</software-version>
<firmware-version>NA</firmware-version>
<hardware-version>NA</hardware-version>
<description>NA</description>
<mfg-name>NA</mfg-name>
<location>44</location>
<type>transceiver</type>
</state>
<transceiver>
  <state>
    <channel-count>1</channel-count>
    <type>sfp</type>
    <presence>Not-Present</presence>
    <port-no>44</port-no>
  </state>
  <sfp>
    <state>
      <recieve-loss-status>NA</recieve-loss-status>
      <transmit-status>off</transmit-status>
    </state>
  </sfp>
</transceiver>
</component>
<component>
  <name>SFP-45</name>
  <state>
    <name>SFP-45</name>
    <parent>PORT-xe45</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>45</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>45</port-no>
    </state>
    <sfp>
      <state>
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
      </state>
    </sfp>
  </transceiver>
</component>
```

```
<component>
  <name>SFP-46</name>
  <state>
    <name>SFP-46</name>
    <parent>PORT-xe46</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>46</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>46</port-no>
    </state>
    <sfp>
      <state>
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
      </state>
    </sfp>
  </transceiver>
</component>
<component>
  <name>SFP-47</name>
  <state>
    <name>SFP-47</name>
    <parent>PORT-xe47</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>47</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>47</port-no>
```

```
</state>
<sfp>
  <state>
    <recieve-loss-status>NA</recieve-loss-status>
    <transmit-status>off</transmit-status>
  </state>
</sfp>
</transceiver>
</component>
<component>
  <name>SFP-48</name>
  <state>
    <name>SFP-48</name>
    <parent>PORT-xe48</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>48</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>1</channel-count>
      <type>sfp</type>
      <presence>Not-Present</presence>
      <port-no>48</port-no>
    </state>
    <sfp>
      <state>
        <recieve-loss-status>NA</recieve-loss-status>
        <transmit-status>off</transmit-status>
      </state>
    </sfp>
  </transceiver>
</component>
<component>
  <name>QSFP-49</name>
  <state>
    <name>QSFP-49</name>
    <parent>PORT-ce49</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
```

```

    <location>49</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <maximum-case-temperature>70.00</maximum-case-temperature>
      <ddm-type>no</ddm-type>
      <vendor-manufacturing-date>150727  </vendor-manufacturing-date>
      <vendor-serial-number>CN05NP8R57Q7T6J </vendor-serial-number>
      <nominal-signalling-rate>103</nominal-signalling-rate>
      <extended-check-code>0x7c</extended-check-code>
      <check-code>0x98</check-code>
      <vendor-revision-number>C </vendor-revision-number>
      <vendor-part-number>616750001 </vendor-part-number>
      <vendor-ieee-id>0x78 0xa7 0x14</vendor-ieee-id>
      <vendor-name>Amphenol </vendor-name>
      <om4-link-length>1</om4-link-length>
      <om3-link-length>0</om3-link-length>
      <om2-link-length>0</om2-link-length>
      <om1-link-length>0</om1-link-length>
      <link-length-kilometer>0</link-length-kilometer>
      <serial-encoding-algorithm>enc-unspecified</serial-encoding-
algorithm>
      <fiber-channel-transmission-media>twinaxial-pair</fiber-channel-
transmission-media>
      <fiber-channel-transmission-technology>electricalInter-Enclosure
electricalIntra-Enclosure</fiber-channel-transmission-technology>
      <fiber-channel-link-length>short</fiber-channel-link-length>
      <ethernet-compliance-code>ec-40gbase-cr4</ethernet-compliance-code>
      <connector-type>no-separable-connector</connector-type>
      <transceiver-identifier>qsfplus-or-later</transceiver-identifier>
      <channel-count>4</channel-count>
      <type>qsf</type>
      <presence>Present</presence>
      <port-no>49</port-no>
    </state>
  </transceiver>
  <state>
    <state>
      <qsfp-options-implemented>tx-cdr-on-or-off-fixed rx-cdr-on-or-off-
fixed rateselect-fixed</qsfp-options-implemented>
      <fiber-channel-qsfp-speed>fcs-800mbps fcs-400mbps fcs-200mbps fcs-
100mbps</fiber-channel-qsfp-speed>
      <qsfp-identifier>powerclass1-1dot5wmax</qsfp-identifier>
      <lane4-recieve-loss>off</lane4-recieve-loss>
      <lane4-transmission-loss>off</lane4-transmission-loss>
      <lane4-transmission>on</lane4-transmission>
      <lane3-recieve-loss>off</lane3-recieve-loss>
      <lane3-transmission-loss>off</lane3-transmission-loss>
      <lane3-transmission>on</lane3-transmission>
      <lane2-recieve-loss>off</lane2-recieve-loss>
      <lane2-transmission-loss>off</lane2-transmission-loss>
      <lane2-transmission>on</lane2-transmission>
      <lane1-recieve-loss>off</lane1-recieve-loss>
      <lane1-transmission-loss>off</lane1-transmission-loss>
      <lane1-transmission>on</lane1-transmission>
      <power>High</power>
      <reset-status>Normal</reset-status>
    </state>
  </state>

```

```
</qsfp>
<channels>
  <channel>
    <index>1</index>
    <state>
      <index>1</index>
      <laser-bias-current>0.000</laser-bias-current>
      <output-power>0.000</output-power>
      <input-power>0.000</input-power>
    </state>
  </channel>
  <channel>
    <index>2</index>
    <state>
      <index>2</index>
      <laser-bias-current>0.000</laser-bias-current>
      <output-power>0.000</output-power>
      <input-power>0.000</input-power>
    </state>
  </channel>
  <channel>
    <index>3</index>
    <state>
      <index>3</index>
      <laser-bias-current>0.000</laser-bias-current>
      <output-power>0.000</output-power>
      <input-power>0.000</input-power>
    </state>
  </channel>
  <channel>
    <index>4</index>
    <state>
      <index>4</index>
      <laser-bias-current>0.000</laser-bias-current>
      <output-power>0.000</output-power>
      <input-power>0.000</input-power>
    </state>
  </channel>
</channels>
</transceiver>
</component>
<component>
  <name>QSFP-50</name>
  <state>
    <name>QSFP-50</name>
    <parent>PORT-ce50</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>50</location>
```

```

    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>4</channel-count>
      <type>qsf</type>
      <presence>Not-Present</presence>
      <port-no>50</port-no>
    </state>
    <qsf>
      <state>
        <lane4-recieve-loss>off</lane4-recieve-loss>
        <lane4-transmission-loss>off</lane4-transmission-loss>
        <lane4-transmission>off</lane4-transmission>
        <lane3-recieve-loss>off</lane3-recieve-loss>
        <lane3-transmission-loss>off</lane3-transmission-loss>
        <lane3-transmission>off</lane3-transmission>
        <lane2-recieve-loss>off</lane2-recieve-loss>
        <lane2-transmission-loss>off</lane2-transmission-loss>
        <lane2-transmission>off</lane2-transmission>
        <lane1-recieve-loss>off</lane1-recieve-loss>
        <lane1-transmission-loss>off</lane1-transmission-loss>
        <lane1-transmission>off</lane1-transmission>
        <power>Low</power>
        <reset-status>Reset</reset-status>
      </state>
    </qsf>
    <channels>
      <channel>
        <index>1</index>
      </channel>
      <channel>
        <index>2</index>
      </channel>
      <channel>
        <index>3</index>
      </channel>
      <channel>
        <index>4</index>
      </channel>
    </channels>
  </transceiver>
</component>
<component>
  <name>QSFP-51</name>
  <state>
    <name>QSFP-51</name>
    <parent>PORT-ce51</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
  </state>
</component>

```

```

    <mfg-name>NA</mfg-name>
    <location>51</location>
    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <maximum-case-temperature>70.00</maximum-case-temperature>
      <ddm-type>no</ddm-type>
      <vendor-manufacturing-date>170628    </vendor-manufacturing-date>
      <vendor-serial-number>J11836008038    </vendor-serial-number>
      <nominal-signalling-rate>255</nominal-signalling-rate>
      <extended-check-code>0x83</extended-check-code>
      <check-code>0x90</check-code>
      <vendor-revision-number>01</vendor-revision-number>
      <vendor-part-number>ET7402-100DAC-1M</vendor-part-number>
      <vendor-ieee-id>0x70 0x72 0xcf</vendor-ieee-id>
      <vendor-name>Edgecore    </vendor-name>
      <om4-link-length>1</om4-link-length>
      <om3-link-length>0</om3-link-length>
      <om2-link-length>0</om2-link-length>
      <om1-link-length>0</om1-link-length>
      <link-length-kilometer>0</link-length-kilometer>
      <serial-encoding-algorithm>enc-unspecified</serial-encoding-
algorithm>
      <extended-ethernet-compliance-code>eec-100gbase-cr4-or-25gbase-crca-
1</extended-ethernet-compliance-code>
      <connector-type>no-separable-connector</connector-type>
      <transceiver-identifier>qsfp28-or-later</transceiver-identifier>
      <channel-count>4</channel-count>
      <type>qsfp</type>
      <presence>Present</presence>
      <port-no>51</port-no>
    </state>
    <qsfp>
      <state>
        <qsfp-options-implemented>tx-cdr-on-or-off-fixed rx-cdr-on-or-off-
fixed rateselect-fixed</qsfp-options-implemented>
        <qsfp-identifier>powerclass1-1dot5wmax</qsfp-identifier>
        <lane4-recieve-loss>off</lane4-recieve-loss>
        <lane4-transmission-loss>off</lane4-transmission-loss>
        <lane4-transmission>on</lane4-transmission>
        <lane3-recieve-loss>off</lane3-recieve-loss>
        <lane3-transmission-loss>off</lane3-transmission-loss>
        <lane3-transmission>on</lane3-transmission>
        <lane2-recieve-loss>off</lane2-recieve-loss>
        <lane2-transmission-loss>off</lane2-transmission-loss>
        <lane2-transmission>on</lane2-transmission>
        <lane1-recieve-loss>off</lane1-recieve-loss>
        <lane1-transmission-loss>off</lane1-transmission-loss>
        <lane1-transmission>on</lane1-transmission>
        <power>High</power>
        <reset-status>Normal</reset-status>
      </state>
    </qsfp>
  </transceiver>
  <channels>
    <channel>
      <index>1</index>

```

```
<state>
  <index>1</index>
  <laser-bias-current>0.000</laser-bias-current>
  <output-power>0.000</output-power>
  <input-power>0.000</input-power>
</state>
</channel>
<channel>
  <index>2</index>
  <state>
    <index>2</index>
    <laser-bias-current>0.000</laser-bias-current>
    <output-power>0.000</output-power>
    <input-power>0.000</input-power>
  </state>
</channel>
<channel>
  <index>3</index>
  <state>
    <index>3</index>
    <laser-bias-current>0.000</laser-bias-current>
    <output-power>0.000</output-power>
    <input-power>0.000</input-power>
  </state>
</channel>
<channel>
  <index>4</index>
  <state>
    <index>4</index>
    <laser-bias-current>0.000</laser-bias-current>
    <output-power>0.000</output-power>
    <input-power>0.000</input-power>
  </state>
</channel>
</channels>
</transceiver>
</component>
<component>
  <name>QSFP-52</name>
  <state>
    <name>QSFP-52</name>
    <parent>PORT-ce52</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>52</location>
    <type>transceiver</type>
  </state>
</transceiver>
<state>
```



```

    <channel-count>4</channel-count>
    <type>qsfp</type>
    <presence>Not-Present</presence>
    <port-no>52</port-no>
  </state>
</qsfp>
<state>
  <lane4-recieve-loss>off</lane4-recieve-loss>
  <lane4-transmission-loss>off</lane4-transmission-loss>
  <lane4-transmission>off</lane4-transmission>
  <lane3-recieve-loss>off</lane3-recieve-loss>
  <lane3-transmission-loss>off</lane3-transmission-loss>
  <lane3-transmission>off</lane3-transmission>
  <lane2-recieve-loss>off</lane2-recieve-loss>
  <lane2-transmission-loss>off</lane2-transmission-loss>
  <lane2-transmission>off</lane2-transmission>
  <lane1-recieve-loss>off</lane1-recieve-loss>
  <lane1-transmission-loss>off</lane1-transmission-loss>
  <lane1-transmission>off</lane1-transmission>
  <power>Low</power>
  <reset-status>Reset</reset-status>
</state>
</qsfp>
<channels>
  <channel>
    <index>1</index>
  </channel>
  <channel>
    <index>2</index>
  </channel>
  <channel>
    <index>3</index>
  </channel>
  <channel>
    <index>4</index>
  </channel>
</channels>
</transceiver>
</component>
<component>
  <name>QSFP-53</name>
  <state>
    <name>QSFP-53</name>
    <parent>PORT-ce53</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>53</location>
    <type>transceiver</type>
  </state>

```

```

<transceiver>
  <state>
    <channel-count>4</channel-count>
    <type>qsfp</type>
    <presence>Not-Present</presence>
    <port-no>53</port-no>
  </state>
  <qsfp>
    <state>
      <lane4-recieve-loss>off</lane4-recieve-loss>
      <lane4-transmission-loss>off</lane4-transmission-loss>
      <lane4-transmission>off</lane4-transmission>
      <lane3-recieve-loss>off</lane3-recieve-loss>
      <lane3-transmission-loss>off</lane3-transmission-loss>
      <lane3-transmission>off</lane3-transmission>
      <lane2-recieve-loss>off</lane2-recieve-loss>
      <lane2-transmission-loss>off</lane2-transmission-loss>
      <lane2-transmission>off</lane2-transmission>
      <lane1-recieve-loss>off</lane1-recieve-loss>
      <lane1-transmission-loss>off</lane1-transmission-loss>
      <lane1-transmission>off</lane1-transmission>
      <power>Low</power>
      <reset-status>Reset</reset-status>
    </state>
  </qsfp>
  <channels>
    <channel>
      <index>1</index>
    </channel>
    <channel>
      <index>2</index>
    </channel>
    <channel>
      <index>3</index>
    </channel>
    <channel>
      <index>4</index>
    </channel>
  </channels>
</transceiver>
</component>
<component>
  <name>QSFP-54</name>
  <state>
    <name>QSFP-54</name>
    <parent>PORT-ce54</parent>
    <product-name>NA</product-name>
    <oper-status>NA</oper-status>
    <removable>true</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>54</location>
  </state>
</component>

```

```

    <type>transceiver</type>
  </state>
  <transceiver>
    <state>
      <channel-count>4</channel-count>
      <type>qsf</type>
      <presence>Not-Present</presence>
      <port-no>54</port-no>
    </state>
    <qsf>
      <state>
        <lane4-recieve-loss>off</lane4-recieve-loss>
        <lane4-transmission-loss>off</lane4-transmission-loss>
        <lane4-transmission>off</lane4-transmission>
        <lane3-recieve-loss>off</lane3-recieve-loss>
        <lane3-transmission-loss>off</lane3-transmission-loss>
        <lane3-transmission>off</lane3-transmission>
        <lane2-recieve-loss>off</lane2-recieve-loss>
        <lane2-transmission-loss>off</lane2-transmission-loss>
        <lane2-transmission>off</lane2-transmission>
        <lane1-recieve-loss>off</lane1-recieve-loss>
        <lane1-transmission-loss>off</lane1-transmission-loss>
        <lane1-transmission>off</lane1-transmission>
        <power>Low</power>
        <reset-status>Reset</reset-status>
      </state>
    </qsf>
  </transceiver>
</components>

```

Show command

Here is Show command output that displays the hardware information for the transceiver.

```
OcNOS#show hardware-information transceiver
```

```

TX      : Transmit status
RX-Los  : Receive status
RESET   : Normal (Out of reset), Reset (In reset)
POWER   : Power level Low/High
-       : NotApplicable

```

SFP: [1-48]

PORT	PRESENCE	Tx	Rx-Los
1	Present	On	-
2	Present	On	-
3	Present	On	-
4	Present	On	-
5	Not Present	Off	-
6	Present	On	-
7	Not Present	Off	-
8	Not Present	Off	-
9	Not Present	Off	-
10	Present	On	-
11	Present	On	On
12	Not Present	Off	-
13	Not Present	Off	-
14	Not Present	Off	-
15	Not Present	Off	-
16	Not Present	Off	-
17	Not Present	Off	-
18	Not Present	Off	-
19	Not Present	Off	-
20	Not Present	Off	-
21	Not Present	Off	-
22	Not Present	Off	-
23	Not Present	Off	-
24	Not Present	Off	-
25	Not Present	Off	-
26	Not Present	Off	-
27	Not Present	Off	-
28	Not Present	Off	-
29	Not Present	Off	-
30	Not Present	Off	-
31	Not Present	Off	-
32	Not Present	Off	-
33	Not Present	Off	-
34	Not Present	Off	-
35	Not Present	Off	-
36	Not Present	Off	-
37	Not Present	Off	-
38	Not Present	Off	-
39	Not Present	Off	-
40	Not Present	Off	-
41	Not Present	Off	-
42	Not Present	Off	-
43	Not Present	Off	-
44	Not Present	Off	-
45	Not Present	Off	-
46	Not Present	Off	-
47	Not Present	Off	-
48	Not Present	Off	-

QSFP: [49-54]

PORT	PRESENCE	RESET	POWER	LANE
------	----------	-------	-------	------

					1	2
3	4					
49 on	Present on	Normal	High	Tx	on	on
Off	Off			Rx-Los	Off	Off
Off	Off			Tx-Los	Off	Off
50 off	Not Present off	Reset	Low	Tx	off	off
Off	Off			Rx-Los	Off	Off
Off	Off			Tx-Los	Off	Off
51 on	Present on	Normal	High	Tx	on	on
Off	Off			Rx-Los	Off	Off
Off	Off			Tx-Los	Off	Off
52 off	Not Present off	Reset	Low	Tx	off	off
Off	Off			Rx-Los	Off	Off
Off	Off			Tx-Los	Off	Off
53 off	Not Present off	Reset	Low	Tx	off	off
Off	Off			Rx-Los	Off	Off
Off	Off			Tx-Los	Off	Off
54 off	Not Present off	Reset	Low	Tx	off	off
Off	Off			Rx-Los	Off	Off
Off	Off			Tx-Los	Off	Off

EEPROM

This platform type displays board EEPROM details.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```
<filter type="subtree">
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <state>
        <name>CHASSIS</name>
      </state>
    </component>
  </components>
</filter>
```

```

    </components>
  </filter>

```

OpenConfig get result

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```

<components xmlns="http://openconfig.net/yang/platform">
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>CHASSIS</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>CHASSIS</id>
      <name>CHASSIS</name>
      <parent>NA</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:ACTIVE</oper-status>
      <removable>false</removable>
      <part-no>FP3ZZ5654000A</part-no>
      <serial-no>591254X1849052</serial-no>
      <software-version>EC_AS5912-54X-OcNOS-5.0.137a-SP_MPLS-S0-P0</
software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>EC_AS5912-54X</description>
      <mfg-date xmlns="http://openconfig.net/yang/platform">2020-08-
18T21:58:52Z</mfg-date>
      <mfg-name>Accton</mfg-name>
      <location>0</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:CHASSIS</type>
    </state>
  </component>
</components>

```

OcNOS get result

Here is the NetConf response in IPI datamodel representation.

```

<components xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <component>
    <name>CHASSIS</name>
    <state>
      <name>CHASSIS</name>
      <parent>NA</parent>
      <product-name>5912-54X-O-AC-F</product-name>
      <oper-status>active</oper-status>
      <removable>false</removable>
      <part-no>FP3ZZ5654000A</part-no>
      <serial-no>591254X1849052</serial-no>
      <software-version>EC_AS5912-54X-OcNOS-5.0.137a-SP_MPLS-S0-P0</
software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>EC_AS5912-54X</description>
    </state>
  </component>
</components>

```

```
<mfg-date>2020-08-18T21:58:52Z</mfg-date>
<mfg-name>Accton</mfg-name>
<location>0</location>
<type>chassis</type>
</state>
<subcomponents>
  <subcomponent>
    <subcomponent-name>HARD-DISK</subcomponent-name>
    <state>
      <subcomponent-name>HARD-DISK</subcomponent-name>
    </state>
  </subcomponent>
  <subcomponent>
    <subcomponent-name>RAM</subcomponent-name>
    <state>
      <subcomponent-name>RAM</subcomponent-name>
    </state>
  </subcomponent>
  <subcomponent>
    <subcomponent-name>CPU</subcomponent-name>
    <state>
      <subcomponent-name>CPU</subcomponent-name>
    </state>
  </subcomponent>
  <subcomponent>
    <subcomponent-name>TEMPERATURE-SENSOR1</subcomponent-name>
    <state>
      <subcomponent-name>TEMPERATURE-SENSOR1</subcomponent-name>
    </state>
  </subcomponent>
  <subcomponent>
    <subcomponent-name>TEMPERATURE-SENSOR2</subcomponent-name>
    <state>
      <subcomponent-name>TEMPERATURE-SENSOR2</subcomponent-name>
    </state>
  </subcomponent>
  <subcomponent>
    <subcomponent-name>TEMPERATURE-SENSOR3</subcomponent-name>
    <state>
      <subcomponent-name>TEMPERATURE-SENSOR3</subcomponent-name>
    </state>
  </subcomponent>
  <subcomponent>
    <subcomponent-name>TEMPERATURE-BCM Chip</subcomponent-name>
    <state>
      <subcomponent-name>TEMPERATURE-BCM Chip</subcomponent-name>
    </state>
  </subcomponent>
  <subcomponent>
    <subcomponent-name>POWER-RAIL</subcomponent-name>
    <state>
      <subcomponent-name>POWER-RAIL</subcomponent-name>
    </state>
  </subcomponent>
  <subcomponent>
    <subcomponent-name>PSU-1</subcomponent-name>
    <state>
```

```
        <subcomponent-name>PSU-1</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PSU-2</subcomponent-name>
    <state>
        <subcomponent-name>PSU-2</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>FAN_TRAY-1</subcomponent-name>
    <state>
        <subcomponent-name>FAN_TRAY-1</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>FAN_TRAY-2</subcomponent-name>
    <state>
        <subcomponent-name>FAN_TRAY-2</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>FAN_TRAY-3</subcomponent-name>
    <state>
        <subcomponent-name>FAN_TRAY-3</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>FAN_TRAY-4</subcomponent-name>
    <state>
        <subcomponent-name>FAN_TRAY-4</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>FAN_TRAY-5</subcomponent-name>
    <state>
        <subcomponent-name>FAN_TRAY-5</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>FAN_TRAY-6</subcomponent-name>
    <state>
        <subcomponent-name>FAN_TRAY-6</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-lo</subcomponent-name>
    <state>
        <subcomponent-name>PORT-lo</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-eth0</subcomponent-name>
    <state>
        <subcomponent-name>PORT-eth0</subcomponent-name>
    </state>
</subcomponent>
```



```
<subcomponent>
  <subcomponent-name>PORT-xe1</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe1</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe2</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe2</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe3</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe3</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe4</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe4</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe5</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe5</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe6</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe6</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe7</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe7</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe8</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe8</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe9</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe9</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe10</subcomponent-name>
  <state>
```

```
        <subcomponent-name>PORT-xe10</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe11</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe11</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe12</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe12</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe13</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe13</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe14</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe14</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe15</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe15</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe16</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe16</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe17</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe17</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe18</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe18</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe19</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe19</subcomponent-name>
    </state>
</subcomponent>
```

```
<subcomponent>
  <subcomponent-name>PORT-xe20</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe20</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe21</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe21</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe22</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe22</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe23</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe23</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe24</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe24</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe25</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe25</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe26</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe26</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe27</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe27</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe28</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe28</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe29</subcomponent-name>
  <state>
```

```
        <subcomponent-name>PORT-xe29</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe30</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe30</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe31</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe31</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe32</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe32</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe33</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe33</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe34</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe34</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe35</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe35</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe36</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe36</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe37</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe37</subcomponent-name>
    </state>
</subcomponent>
<subcomponent>
    <subcomponent-name>PORT-xe38</subcomponent-name>
    <state>
        <subcomponent-name>PORT-xe38</subcomponent-name>
    </state>
</subcomponent>
```

```
<subcomponent>
  <subcomponent-name>PORT-xe39</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe39</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe40</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe40</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe41</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe41</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe42</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe42</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe43</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe43</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe44</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe44</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe45</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe45</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe46</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe46</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe47</subcomponent-name>
  <state>
    <subcomponent-name>PORT-xe47</subcomponent-name>
  </state>
</subcomponent>
<subcomponent>
  <subcomponent-name>PORT-xe48</subcomponent-name>
  <state>
```

```

        <subcomponent-name>PORT-xe48</subcomponent-name>
      </state>
    </subcomponent>
    <subcomponent>
      <subcomponent-name>PORT-ce49</subcomponent-name>
      <state>
        <subcomponent-name>PORT-ce49</subcomponent-name>
      </state>
    </subcomponent>
    <subcomponent>
      <subcomponent-name>PORT-ce50</subcomponent-name>
      <state>
        <subcomponent-name>PORT-ce50</subcomponent-name>
      </state>
    </subcomponent>
    <subcomponent>
      <subcomponent-name>PORT-ce51</subcomponent-name>
      <state>
        <subcomponent-name>PORT-ce51</subcomponent-name>
      </state>
    </subcomponent>
    <subcomponent>
      <subcomponent-name>PORT-ce52</subcomponent-name>
      <state>
        <subcomponent-name>PORT-ce52</subcomponent-name>
      </state>
    </subcomponent>
    <subcomponent>
      <subcomponent-name>PORT-ce53</subcomponent-name>
      <state>
        <subcomponent-name>PORT-ce53</subcomponent-name>
      </state>
    </subcomponent>
    <subcomponent>
      <subcomponent-name>PORT-ce54</subcomponent-name>
      <state>
        <subcomponent-name>PORT-ce54</subcomponent-name>
      </state>
    </subcomponent>
    <subcomponent>
      <subcomponent-name>PORT-lo.management</subcomponent-name>
      <state>
        <subcomponent-name>PORT-lo.management</subcomponent-name>
      </state>
    </subcomponent>
  </subcomponents>
</chassis>
<state>
  <supported-switch-chip-revision>BCM88370_B0</supported-switch-chip-
revision>
  <supported-label-revision>R0BB</supported-label-revision>
  <fan-board-id>Reserved</fan-board-id>
  <switch-chip-revision>BCM88370_B0</switch-chip-revision>
  <cyclic-redundancy-32bit-value>0x797A6D84</cyclic-redundancy-32bit-
value>
  <diagnostic-version>0.0.5.9</diagnostic-version>
  <vendor-name>Edgecore</vendor-name>

```

```

    <onie-version>2018.05.00.04</onie-version>
    <platform-name>x86_64-accton_as5912_54x-r0</platform-name>
    <chassis-100g-ethernet-count>6</chassis-100g-ethernet-count>
    <chassis-50g-ethernet-count>0</chassis-50g-ethernet-count>
    <chassis-40g-ethernet-count>0</chassis-40g-ethernet-count>
    <chassis-25g-ethernet-count>0</chassis-25g-ethernet-count>
    <chassis-10g-ethernet-count>48</chassis-10g-ethernet-count>
    <chassis-1g-ethernet-count>0</chassis-1g-ethernet-count>
    <chassis-fast-ethernet-count>0</chassis-fast-ethernet-count>
    <power-supplies-count>2</power-supplies-count>
    <fan-tray-count>6</fan-tray-count>
    <country-code>TW</country-code>
    <label-revision>R02B</label-revision>
    <mac-address>B8:6A:97:A7:47:3C</mac-address>
    <up-time>517700</up-time>
  </state>
</chassis>
</component>
</components>

```

Show command

Here is Show command output that displays the hardware information for the board.

```

OcNOS#show system-information board-info

System Board Information
=====
Product Name       : 5912-54X-O-AC-F
Part Number        : FP3ZZ5654000A
Serial Number      : 591254X1849052
Base MAC Address   : B8:6A:97:A7:47:3C
Manufacture Date   : 08/18/2020 21:58:52
Label Revision     : R02B
Platform Name      : x86_64-accton_as5912_54x-r0
ONIE Version       : 2018.05.00.04
MAC Addresses      : 256
Manufacturer       : Accton
Country Code       : TW
Vendor Name        : Edgecore
Diag Version       : 0.0.5.9
CRC-32             : 0x797A6D84
Switch Chip Revision : BCM88370_B0
CPLD 1 Board Info  : ES5654BQ
Fan Board Id       : Reserved
CPLD 1 PCB version ID : Reserved
CPLD 1 Version     : 9
CPLD 2 Version     : 6
Fan CPLD Version   : 2

```

CPU

This platform type displays CPU load information.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```
<filter type="subtree">
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <state>
        <name>CPU</name>
      </state>
    </component>
  </components>
</filter>
```

OpenConfig get result

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-
types">
    <name>CPU</name>
    <state xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">
      <id>CPU</id>
      <name>CPU</name>
      <parent>CHASSIS</parent>
      <oper-status xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">ipi-oc-
platform-types-deviations:NA</oper-status>
      <removable>false</removable>
      <part-no>NA</part-no>
      <serial-no>NA</serial-no>
      <software-version>NA</software-version>
      <firmware-version>NA</firmware-version>
      <hardware-version>NA</hardware-version>
      <description>NA</description>
      <mfg-name>NA</mfg-name>
      <location>0</location>
      <type xmlns:ipi-oc-platform-types-deviations="http://
www.ipinfusion.com/yang/ocnos/ipi-oc-platform-types-deviations">oc-platform-
types:CPU</type>
    </state>
  </component>
</components>
```

OcNOS get result

Here is the NetConf response in IPI datamodel representation.

```
<components xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <component>
    <name>CPU</name>
    <state>
      <name>CPU</name>
      <parent>CHASSIS</parent>
      <product-name>NA</product-name>
```



```

    <oper-status>NA</oper-status>
    <removable>>false</removable>
    <part-no>NA</part-no>
    <serial-no>NA</serial-no>
    <software-version>NA</software-version>
    <firmware-version>NA</firmware-version>
    <hardware-version>NA</hardware-version>
    <description>NA</description>
    <mfg-name>NA</mfg-name>
    <location>0</location>
    <type>cpu</type>
  </state>
  <cpu>
    <state>
      <cpu-utilization-critical>50</cpu-utilization-critical>
      <cpu-utilization-alert>90</cpu-utilization-alert>
      <cpu-utilization>3.02</cpu-utilization>
      <cpu-15min-alert-threshold>50</cpu-15min-alert-threshold>
      <cpu-5min-alert-threshold>50</cpu-5min-alert-threshold>
      <cpu-1min-critical-threshold>40</cpu-1min-critical-threshold>
      <cpu-1min-alert-threshold>50</cpu-1min-alert-threshold>
      <cpu-15min-load-percentage>3.89</cpu-15min-load-percentage>
      <cpu-5min-load-percentage>5.57</cpu-5min-load-percentage>
      <cpu-1min-load-percentage>8.17</cpu-1min-load-percentage>
      <processor-count>4</processor-count>
    </state>
  </cpu>
</component>
</components>

```

Show command

Here is Show command output that displays the hardware information for the CPU load.

```
OcNOS#show system-information cpu-load
```

```
System CPU-Load Information
=====
```

```

Uptime                               : 0 Days 1 Hours 29 Minutes 2 Seconds

Load Average(1 min)                  : 5.93% (Crit Thresh : 40%, Alert Thresh : 50%)
Load Average(5 min)                  : 4.06% (Crit Thresh : N/A, Alert Thresh : 50%)
Load Average(15 min)                 : 3.28% (Crit Thresh : N/A, Alert Thresh : 50%)

Avg CPU Usage                         : 3.02%
CPU core 1 Usage                      : 3.74% (Crit Thresh : 50%, Alert Thresh : 90%)
CPU core 2 Usage                      : 0.93% (Crit Thresh : 50%, Alert Thresh : 90%)
CPU core 3 Usage                      : 6.48% (Crit Thresh : 50%, Alert Thresh : 90%)
CPU core 4 Usage                      : 0.00% (Crit Thresh : 50%, Alert Thresh : 90%)

```

System OpenConfig Translation

Host

This XML configuration snippet is used to set the network name for the device that OcNOS uses in system prompts and default configuration filenames.

Using this command to set a network name also sets the host name in the Kernel.

Release

This configuration was introduced in OcNOS version 5.0.

OpenConfig NETCONF Payload

Here is a sample OpenConfig NetConf Payload to set the network name for the device.

```
<system xmlns="http://openconfig.net/yang/system">
  <config>
    <hostname>host123</hostname>
  </config>
</system>
```

OcNOS CLI command

This CLI command is used to set the network name for the device.

```
OcNOS#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
OcNOS(config)#hostname host123
OcNOS(config)#commit
```

OcNOS NETCONF Payload

Here is a sample OcNOS NetConf Payload to set the network name for the device.

```
<system-info xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-system">
  <config>
    <hostname>host123</hostname>
  </config>
</system-info>
```

Validation

Here is a NetConf validation response that provides detailed information about setting the network name for the device.

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```
<system xmlns="http://openconfig.net/yang/system">
  <config/>
  <state/>
</system>
```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for setting a network name for the device.

```
<system xmlns="http://openconfig.net/yang/system">
  <config>
    <hostname>host123</hostname>
  </config>
  <state>
    <hostname>host123</hostname>
    <current-datetime>2021-11-18T12:36:44Z</current-datetime>
  </state>
</system>
```

Unconfiguration

Use `operation='delete'` to unconfigure the configuration of network name on the device. Once unconfigured, the host name returns to the default name "OcNOS".

OpenConfig NETCONF Payload

Here is a sample OpenConfig NetConf Payload to unconfigure.

```
<system xmlns="http://openconfig.net/yang/system">
  <config>
    <hostname operation="delete" />
  </config>
</system>
```

Restriction

As per RFC 952 and RFC 1123, a host name string can contain only the special characters period (".") and hyphen ("-"). These special characters cannot be at the start or end of a host name. The host name must be between 1 and 63 characters.

TimeZone Clock

This XML configuration snippet is used to set the system time zone.

Release

This configuration was introduced in OcNOS version 5.0.

OpenConfig NETCONF Payload

Here is a sample OpenConfig NetConf Payload to set the system time zone.

```
<system xmlns="http://openconfig.net/yang/system">
```

```
<clock>
  <config>
    <timezone-name>Pacific</timezone-name>
  </config>
</clock>
</system>
```

OcNOS CLI command

This CLI command is used to set the system time zone.

```
OcNOS#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
OcNOS(config)#clock timezone Pacific
OcNOS(config)#commit
```

OcNOS NETCONF Payload

Here is a sample OcNOS NetConf Payload to set the system time zone.

```
<system xmlns="http://openconfig.net/yang/system">
  <clock>
    <config>
      <timezone-name>Pacific</timezone-name>
    </config>
  </clock>
</system>
```

Validation

Here is a NetConf validation response that provides detailed information about setting system time zone.

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```
<system xmlns="http://openconfig.net/yang/system">
  <clock/>
</system>
```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for setting system time zone.

```
<system xmlns="http://openconfig.net/yang/system">
  <clock>
    <config>
      <timezone-name>Pacific</timezone-name>
    </config>
    <state>
      <timezone-name>Pacific</timezone-name>
    </state>
  </clock>
</system>
```

Restrictions

The names allowed to be used for the time zone can be queried using the `show timezone <macro region>` CLI command.

There is currently no provision to query this list through OpenConfig.

Rsyslog

This XML configuration snippet is used to change the Virtual Routing and Forwarding (VRF) of Rsyslog log processing system.

Release

This configuration was introduced in OcNOS version 5.0.

OpenConfig NETCONF Payload

Here is a sample OpenConfig NetConf Payload to change the VRF of Rsyslog.

```
<system xmlns="http://openconfig.net/yang/system">
  <logging>
    <remote-servers>
      <config xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-sys-
deviations">
        <vrf>management</vrf>
      </config>
    </remote-servers>
  </logging>
</system>
```

OcNOS CLI command

This CLI command is used to change the VRF of Rsyslog.

```
OcNOS#conf t
Enter configuration commands, one per line. End with CNTL/Z.
OcNOS(config)#feature rsyslog vrf management
OcNOS(config)#commit
```

OcNOS NETCONF Payload

Here is a sample OcNOS NetConf Payload to change the VRF of Rsyslog.

```
<logging xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-logging">
  <rsyslog>
    <vrf>management</vrf>
    <config>
      <vrf>management</vrf>
    </config>
  </rsyslog>
</logging>
```

Validation

Here is a NetConf validation response that provides detailed information about changing VRF of Rsyslog.

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```
<system xmlns="http://openconfig.net/yang/system">
  <logging/>
</system>
```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for changing VRF for Rsyslog.

```
<system xmlns="http://openconfig.net/yang/system">
  <logging>
    <remote-servers>
      <config xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-sys-
deviations">
        <vrf>management</vrf>
      </config>
      <state xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-sys-
deviations">
        <vrf>management</vrf>
      </state>
    </remote-servers>
  </logging>
</system>
```

Restrictions

The leaf `system/logging/remote-servers/config/vrf` accepts only default or management.

Logging Remote Server

This XML configuration snippet is used to set a syslog server.

OcNOS supports logging messages to a syslog server in addition to logging to a file or the console (local or ssh/telnet console). Messages can be logged to a local syslog server (the machine on which OcNOS executes) as well as one or more remote syslog servers.

Release

This configuration was introduced in OcNOS version 5.0.

OpenConfig NETCONF Payload

Here is a sample OpenConfig NetConf Payload to set a syslog server.

```
<system xmlns="http://openconfig.net/yang/system">
  <logging>
    <remote-servers>
```

```

    <config xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-sys-
deviations">
      <vrf>management</vrf>
    </config>
    <remote-server>
      <host>2.2.2.3</host>
      <config>
        <host>2.2.2.3</host>
      </config>
      <selectors>
        <selector>
          <severity>DEBUG</severity>
          <config>
            <severity>DEBUG</severity>
          </config>
        </selector>
      </selectors>
    </remote-server>
  </remote-servers>
</logging>
</system>

```

OcNOS CLI command

This CLI command is used to set a syslog server.

```

OcNOS#conf t
Enter configuration commands, one per line. End with CNTL/Z.
OcNOS(config)#logging remote server 2.2.2.3 7 vrf management
OcNOS(config)#commit

```

OcNOS NETCONF Payload

Here is a sample OcNOS NetConf Payload to set a syslog server.

```

<logging xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-logging">
  <rsyslog>
    <vrf>management</vrf>
    <remote-servers>
      <remote-server>
        <address>2.2.2.3</address>
        <config>
          <address>2.2.2.3</address>
          <severity>7</severity>
        </config>
      </remote-server>
    </remote-servers>
  </rsyslog>
</logging>

```

Validation

Here is a NetConf validation response that provides detailed information about setting a syslog server.

Get Openconfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```
<system xmlns="http://openconfig.net/yang/system">
  <logging/>
</system>
```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for setting a syslog server.

```
<system xmlns="http://openconfig.net/yang/system">
  <logging>
    <remote-servers>
      <config xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-sys-
deviations">
        <vrf>management</vrf>
      </config>
      <state xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-sys-
deviations">
        <vrf>management</vrf>
      </state>
      <remote-server>
        <host>2.2.2.3</host>
        <config>
          <host>2.2.2.3</host>
        </config>
        <selectors>
          <selector>
            <severity>DEBUG</severity>
            <config>
              <severity>DEBUG</severity>
            </config>
            <state>
              <severity>DEBUG</severity>
            </state>
          </selector>
        </selectors>
        <state>
          <host>2.2.2.3</host>
        </state>
      </remote-server>
    </remote-servers>
  </logging>
</system>
```

Restrictions

- When configuring `/system/logging/remote-servers/remote-server/selectors/selector/config/facility` leaf, it is mapped on IPI data model as `/logging/global/config/remote-server-facility` leaf, which is a single and global configuration. To avoid issues during configuration, the value of OpenConfig facility leaf must be the same on all facility leaves indicated on Payload. Otherwise, IPI

chooses one `facility` value among all the values present on payload for the configuration of all `facility` leaves.

- When the delete operation is set on OpenConfig path `/system/logging/remote-servers`, it triggers the deletion of IPI data model `/logging/global/config/remote-server-facility` leaf.
- When the OpenConfig objects `/system/logging/remote-servers/remote-server` are deleted individually, it will not trigger the deletion of IPI datamodel `/logging/global/config/remote-server-facility` leaf. In this case, this leaf will not be shown on NetConf Get output, but will be shown on `show running-config` CLI.

Logging Remote Facility

This XML configuration snippet is used to set a syslog servers facility.

OcNOS supports logging messages to one or more remote syslog servers, but the same facility is used for all the servers.

Use the number form of this command to apply the default facility value, which is local7.

Release

This configuration was introduced in OcNOS version 5.0

OpenConfig NETCONF Payload

Here is a sample OpenConfig NetConf Payload to set syslog servers facility.

```
<system xmlns="http://openconfig.net/yang/system">
  <logging>
    <remote-servers>
      <config xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-sys-
deviations">
        <vrf>management</vrf>
      </config>
    <remote-server>
      <host>2.2.2.3</host>
      <config>
        <host>2.2.2.3</host>
      </config>
      <selectors>
        <selector>
          <facility>oc-log:LOCAL5</facility>
          <severity>DEBUG</severity>
          <config>
            <facility>oc-log:LOCAL5</facility>
            <severity>DEBUG</severity>
          </config>
        </selector>
      </selectors>
    </remote-server>
  </remote-servers>
</logging>
</system>
```

OcNOS CLI command

The below CLI command is used to set syslog servers facility.

```
OcNOS#conf t
Enter configuration commands, one per line. End with CNTL/Z.
OcNOS(config)#logging remote facility local5
OcNOS(config)#commit
```

OcNOS NETCONF Payload

Here is a sample OcNOS NetConf Payload to set syslog servers facility.

```
<logging>
  <remote-servers>
    <config xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-sys-
deviations">
      <vrf>management</vrf>
    </config>
    <remote-server>
      <host>2.2.2.3</host>
      <config>
        <host>2.2.2.3</host>
      </config>
      <selectors>
        <selector>
          <facility>oc-log:LOCAL5</facility>
          <severity>DEBUG</severity>
          <config>
            <facility>oc-log:LOCAL5</facility>
            <severity>DEBUG</severity>
          </config>
        </selector>
      </selectors>
    </remote-server>
  </remote-servers>
</logging>
```

Validation

Here is a NetConf validation response that provides detailed information about setting a syslog servers facility.

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```
<system xmlns="http://openconfig.net/yang/system">
  <logging/>
</system>
```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for setting a syslog servers facility.

```
<system xmlns="http://openconfig.net/yang/system">
  <logging>
    <remote-servers>
```

```

    <config xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-sys-
deviations">
      <vrf>management</vrf>
    </config>
    <state xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-sys-
deviations">
      <vrf>management</vrf>
    </state>
    <remote-server>
      <host>2.2.2.3</host>
      <config>
        <host>2.2.2.3</host>
      </config>
      <selectors>
        <selector>
          <facility>oc-log:LOCAL5</facility>
          <severity>DEBUG</severity>
          <config>
            <facility>oc-log:LOCAL5</facility>
            <severity>DEBUG</severity>
          </config>
          <state>
            <facility>oc-log:LOCAL5</facility>
            <severity>DEBUG</severity>
          </state>
        </selector>
      </selectors>
      <state>
        <host>2.2.2.3</host>
      </state>
    </remote-server>
  </remote-servers>
</logging>
</system>

```

Restrictions

- The `facility` leaf can only be added using OpenConfig to a configured remote server, as it is a part of the object's key on the path `/system/logging/remote-servers/remote-server/selectors/selector`.
- When configuring `/system/logging/remote-servers/remote-server/selectors/selector/config/facility` leaf, it is mapped on IPI data model as `/logging/global/config/remote-server-facility` leaf, which is a single and global configuration. To avoid issues during configuration, the value of OpenConfig `facility` leaf must be the same on all `facility` leaves indicated on Payload. Otherwise, IPI chooses one `facility` value among all the values present on payload for the configuration of all `facility` leaves.
- When the delete operation is set on OpenConfig path `/system/logging/remote-servers`, it triggers the deletion of IPI data model `/logging/global/config/remote-server-facility` leaf.
- When the OpenConfig objects `/system/logging/remote-servers/remote-server` are deleted individually, it will not trigger the deletion of IPI datamodel `/logging/global/config/remote-server-facility` leaf. In this case, this leaf will not be shown on NetConf Get output, but will be shown on `show running-config CLI`.

Alarms

Alarms do not have a configuration on OpenConfig. It is a runtime attribute, and when some event triggers the alarm, it can be viewed on OpenConfig.

Use the following CLI command to enable Alarms:

```
OcNOS#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
OcNOS(config)#fault-management enable
OcNOS(config)#commit
```

To enable Alarms., it is necessary to change the logging levels to 4 or more using the following command:

```
OcNOS#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
OcNOS(config)#logging level all 4
OcNOS(config)#commit
```

Release

This configuration was introduced in OcNOS version 5.1.

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```
<system xmlns="http://openconfig.net/yang/system">
  <alarms/>
</system>
```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for enabling the alarm.

```
<system xmlns="http://openconfig.net/yang/system">
  <alarms>
    <alarm>
      <id>IFMGR_IF_DOWN:ce2/1</id>
      <state>
        <id>IFMGR_IF_DOWN:ce2/1</id>
        <type-id>EQPT</type-id>
        <severity xmlns:oc-alarm-types="http://openconfig.net/yang/alarms/
types">oc-alarm-types:MAJOR</severity>
        <alarm-reported-timestamp xmlns="http://www.ipinfusion.com/yang/ocnos/
ipi-oc-sys-deviations">Thu Dec 16 2021 20:31:28 UTC</alarm-reported-timestamp>
        <time-created>1639686688</time-created>
        <text>OcNOS [IFMGR_IF_DOWN] Interface ce2/1 changed state to down</
text>
        <resource>ce2/1</resource>
      </state>
    </alarm>
  </alarms>
</system>
```

OcNOS CLI show command

This OcNOS CLI show command is used to enable the alarm.

```
OcNOS#show alarm active
Active Alarms received:-
Active Alarm Count: 2
Severity      Status      Alarm Description
MAJOR         Active      OcNOS [IFMGR_IF_DOWN] Interface ce2/1 changed state to
down
```

Restrictions

The alarms get generated only for some events as mentioned in the list here:

<https://jira-ipi.atlassian.net/wiki/spaces/IPI/pages/741900306/Alarms+Datamodel+Design+Document#3.1.3--List-of-supported%2Fregistered-alarms-in-OcNOS-5.1>

<https://jira-ipi.atlassian.net/wiki/spaces/IPI/pages/741900306/Alarms+Datamodel+Design+Document#3.1.2--List-of-supported%2Fregistered-alarms-in-OcNOS-5.0>

VLAN OpenConfig Translation

Match Single Tagged VLAN

This XML configuration snippet is used to set a single tag VLAN match.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to set a single tag VLAN match.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe24</name>
    <config>
      <name>xe24</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <subinterfaces>
      <subinterface>
        <index>20</index>
        <config>
          <index>20</index>
        </config>
        <vlan xmlns="http://openconfig.net/yang/vlan">
          <match>
            <single-tagged-list>
              <config>
                <vlan-ids>6</vlan-ids>
              </config>
            </single-tagged-list>
          </match>
        </vlan>
      </subinterface>
    </subinterfaces>
  </interface>
</interfaces>
```

OcNOS CLI Command

The below CLI command is used to set a single tag VLAN match.

```
interface xe24.20
  encapsulation dot1q 6
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to set a single tag VLAN match.

```
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe24</name>
    <config>
      <name>xe24</name>
    </config>
  </interface>
  <interface>
    <name>xe24.20</name>
    <config>
      <name>xe24.20</name>
    </config>
  <extended xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-
extended">
    <subinterface-encapsulation>
      <single-tag-vlan-matches>
        <single-tag-vlan-match>
          <encapsulation-type>dot1q</encapsulation-type>
          <config>
            <encapsulation-type>dot1q</encapsulation-type>
            <outer-vlan-id>6</outer-vlan-id>
          </config>
        </single-tag-vlan-match>
      </single-tag-vlan-matches>
    </subinterface-encapsulation>
  </extended>
</interface>
</interfaces>
```

Validation with NetConf get

Here is a NetConf validation response that gives a detailed information about the single tagged VLAN match.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe24</name>
    <config>
      <name>xe24</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <vlan xmlns="http://openconfig.net/yang/vlan">
      <match>
        <single-tagged-list>
          <config>
            <vlan-ids>6</vlan-ids>
          </config>
          <state>
            <vlan-ids>6</vlan-ids>
          </state>
        </single-tagged-list>
      </match>
    </vlan>
  </interface>
</interfaces>
```

```

    </subinterface>
  </subinterfaces>
</interface>
</interfaces>

```

Restrictions

None

Match single tagged VLAN range

This XML configuration snippet is used to set a single tag VLAN range in a subinterface.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to set a single tag VLAN range in a subinterface.

```

<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe26</name>
    <subinterfaces>
      <subinterface>
        <index>10</index>
        <config>
          <index>10</index>
        </config>
        <vlan xmlns="http://openconfig.net/yang/vlan">
          <match>
            <single-tagged-range>
              <config>
                <low-vlan-id>10</low-vlan-id>
                <high-vlan-id>20</high-vlan-id>
              </config>
            </single-tagged-range>
          </match>
          <ingress-mapping>
            <config>
              <vlan-stack-action>PUSH</vlan-stack-action>
              <vlan-id>15</vlan-id>
              <tpid xmlns:oc-vlan-types="http://openconfig.net/yang/
vlan-types">oc-vlan-types:TPID_0X88A8</tpid>
            </config>
          </ingress-mapping>
        </vlan>
      </subinterface>
    </subinterfaces>
  </interface>
</interfaces>

```

OcNOS CLI Command

The below CLI command is used to set a single tag VLAN range in a subinterface.

```
interface xe26.10 switchport
  encapsulation dot1q 10-20
  rewrite push 0x88a8 15
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to set a single tag VLAN range in a subinterface.

```
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe26</name>
    <config>
      <name>xe26</name>
    </config>
  </interface>
  <interface>
    <name>xe26.10</name>
    <config>
      <name>xe26.10</name>
      <enable-switchport />
    </config>
    <extended xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-extended">
      <subinterface-encapsulation>
        <single-tag-vlan-matches>
          <single-tag-vlan-match>
            <encapsulation-type>dot1q</encapsulation-type>
            <config>
              <encapsulation-type>dot1q</encapsulation-type>
              <outer-vlan-id>10-20</outer-vlan-id>
            </config>
          </single-tag-vlan-match>
        </single-tag-vlan-matches>
        <rewrite>
          <config>
            <vlan-action>push</vlan-action>
            <push-outer-vlan-id>15</push-outer-vlan-id>
            <push-tpid>0x88a8</push-tpid>
          </config>
        </rewrite>
      </subinterface-encapsulation>
    </extended>
  </interface>
</interfaces>
```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about the single tag VLAN range in a subinterface.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
```

```

    <name>xe26</name>
    <config>
      <name>xe26</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <subinterfaces>
      <subinterface>
        <index>0</index>
        <config>
          <index>0</index>
        </config>
      </subinterface>
      <subinterface>
        <index>10</index>
        <config>
          <index>10</index>
        </config>
        <state>
          <name>xe26.10</name>
          <logical>true</logical>
          <oper-status>DOWN</oper-status>
          <ifindex>328531978</ifindex>
          <counters>
            <last-clear>0</last-clear>
            <out-pkts>0</out-pkts>
            <out-octets>0</out-octets>
            <in-pkts>0</in-pkts>
            <in-octets>0</in-octets>
          </counters>
        </state>
      <vlan xmlns="http://openconfig.net/yang/vlan">
        <ingress-mapping>
          <config>
            <vlan-stack-action>PUSH</vlan-stack-action>
            <tpid>TPID_0X88A8</tpid>
            <vlan-id>15</vlan-id>
          </config>
          <state>
            <vlan-stack-action>PUSH</vlan-stack-action>
            <tpid>TPID_0X88A8</tpid>
            <vlan-id>15</vlan-id>
          </state>
        </ingress-mapping>
        <match>
          <single-tagged-range>
            <config>
              <low-vlan-id>10</low-vlan-id>
              <high-vlan-id>20</high-vlan-id>
            </config>
            <state>
              <low-vlan-id>10</low-vlan-id>
              <high-vlan-id>20</high-vlan-id>
            </state>
          </single-tagged-range>
        </match>
      </vlan>
    </subinterface>
  </subinterfaces>
</config>

```

```

    </subinterface>
  </subinterfaces>
</interface>
</interfaces>

```

Restrictions

If OcNOS “switchport” parameter has not been set previously on subinterface, VLAN range match needs to be configured along with ingress-mapping or added in the cross-connect network-instance.

Match double tagged VLAN

This XML configuration snippet is used to set an outer VLAN match in a subinterface.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to set an outer VLAN match in a subinterface.

```

<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe37</name>
    <config>
      <name>xe37</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <subinterfaces>
      <subinterface>
        <index>100</index>
        <config>
          <index>100</index>
        </config>
        <vlan xmlns="http://openconfig.net/yang/vlan">
          <match>
            <double-tagged-outer-list>
              <config>
<outer-vlan-ids>400</outer-vlan-ids>
              </config>
            </double-tagged-outer-list>
          </match>
        </vlan>
      </subinterface>
    </subinterfaces>
  </interface>
</interfaces>

```

OcNOS CLI Command

The below CLI command is used to set an outer VLAN match in a subinterface.

```
interface xe37.100
  encapsulation dot1ad 400
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to set an outer VLAN match in a subinterface.

```
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe37</name>
    <config>
      <name>xe37</name>
    </config>
  </interface>
  <interface>
    <name>xe37.100</name>
    <config>
      <name>xe37.100</name>
    </config>
    <extended xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-extended">
      <subinterface-encapsulation>
        <single-tag-vlan-matches>
          <single-tag-vlan-match>
            <encapsulation-type>dot1ad</encapsulation-type>
            <config>
              <encapsulation-type>dot1ad</encapsulation-type>
              <outer-vlan-id>400</outer-vlan-id>
            </config>
          </single-tag-vlan-match>
        </single-tag-vlan-matches>
      </subinterface-encapsulation>
    </extended>
  </interface>
</interfaces>
```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about the outer VLAN match in a subinterface.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe37</name>
    <config>
      <name>xe37</name>
    </config>
  <subinterfaces>
    <subinterface>
      <index>100</index>
      <config>
        <index>100</index>
      </config>
    </subinterface>
  </subinterfaces>
</interfaces>
```

```

    <state>
      <name>xe37.100</name>
      <logical>true</logical>
      <oper-status>DOWN</oper-status>
      <ifindex>328892516</ifindex>
      <counters>
        <last-clear>0</last-clear>
        <out-pkts>0</out-pkts>
        <out-octets>0</out-octets>
        <in-pkts>0</in-pkts>
        <in-octets>0</in-octets>
      </counters>
    </state>
  <vlan xmlns="http://openconfig.net/yang/vlan">
    <match>
      <double-tagged-outer-list>
        <config>
          <outer-vlan-ids>400</outer-vlan-ids>
        </config>
        <state>
          <outer-vlan-ids>400</outer-vlan-ids>
        </state>
      </double-tagged-outer-list>
    </match>
  </vlan>
</subinterface>
</subinterfaces>
</interface>
</interfaces>

```

Restrictions

Double-tagged-outer-list does not support the inner-vlan-id configuration.

Match double tagged with outer and inner VLAN

This XML configuration snippet is used to set outer and inner VLAN match in a subinterface.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to set outer and inner VLAN match in a subinterface.

```

<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe25</name>
    <config>
      <name>xe25</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>

```

```

</config>
<subinterfaces>
  <subinterface>
    <index>20</index>
    <config>
      <index>20</index>
    </config>
    <vlan xmlns="http://openconfig.net/yang/vlan">
      <match>
        <double-tagged>
          <config>
            <outer-vlan-id>40</outer-vlan-id>
            <inner-vlan-id>30</inner-vlan-id>
          </config>
        </double-tagged>
      </match>
    </vlan>
  </subinterface>
</subinterfaces>
</interface>
</interfaces>

```

OcNOS CLI Command

The below CLI command is used to set outer and inner VLAN match in a subinterface.

```

interface xe25.20
  encapsulation dot1ad 40 inner-dot1q 30

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to set outer and inner VLAN match in a subinterface.

```

<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe25</name>
    <config>
      <name>xe25</name>
    </config>
  </interface>
  <interface>
    <name>xe25.20</name>
    <config>
      <name>xe25.20</name>
    </config>
    <extended xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-extended">
      <subinterface-encapsulation>
        <double-tag-vlan-matches>
          <double-tag-vlan-match>
            <encapsulation-type>dot1ad</encapsulation-type>
            <outer-vlan-id>40</outer-vlan-id>
            <config>
              <encapsulation-type>dot1ad</encapsulation-type>
              <outer-vlan-id>40</outer-vlan-id>
              <inner-vlan-id>30</inner-vlan-id>
            </config>
          </double-tag-vlan-match>
        </double-tag-vlan-matches>
      </subinterface-encapsulation>
    </extended>
  </interface>
</interfaces>

```

```

        </config>
      </double-tag-vlan-match>
    </double-tag-vlan-matches>
  </subinterface-encapsulation>
</extended>
</interface>
</interfaces>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about the outer and inner VLAN match in a subinterface.

```

<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe25</name>
    <config>
      <name>xe25</name>
    </config>
    <subinterfaces>
      <subinterface>
        <index>20</index>
        <config>
          <index>20</index>
        </config>
        <state>
          <name>xe25.20</name>
          <logical>true</logical>
          <oper-status>DOWN</oper-status>
          <ifindex>328499220</ifindex>
          <counters>
            <last-clear>0</last-clear>
            <out-pkts>0</out-pkts>
            <out-octets>0</out-octets>
            <in-pkts>0</in-pkts>
            <in-octets>0</in-octets>
          </counters>
        </state>
        <vlan xmlns="http://openconfig.net/yang/vlan">
          <match>
            <double-tagged>
              <config>
                <outer-vlan-id>40</outer-vlan-id>
                <inner-vlan-id>30</inner-vlan-id>
              </config>
              <state>
                <outer-vlan-id>40</outer-vlan-id>
                <inner-vlan-id>30</inner-vlan-id>
              </state>
            </double-tagged>
          </match>
        </vlan>
      </subinterface>
    </subinterfaces>
  </interface>
</interfaces>

```

Restrictions

None

Ingress-mapping actions

This XML configuration snippet is used to configure an ingress-mapping with VLAN actions. The allowed actions are PUSH, POP and SWAP.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure an ingress-mapping with VLAN actions.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe32</name>
    <config>
      <name>xe32</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <subinterfaces>
      <subinterface>
        <index>100</index>
        <config>
          <index>100</index>
        </config>
        <vlan xmlns="http://openconfig.net/yang/vlan">
          <match>
            <single-tagged-list>
              <config>
                <vlan-ids>10</vlan-ids>
              </config>
            </single-tagged-list>
          </match>
          <ingress-mapping>
            <config>
              <vlan-stack-action>SWAP</vlan-stack-action>
              <tpid>TPID_0X8100</tpid>
              <vlan-id>100</vlan-id>
            </config>
          </ingress-mapping>
        </vlan>
      </subinterface>
    </subinterfaces>
  </interface>
</interfaces>
```

OcNOS CLI Command

The below CLI command is used to configure an ingress-mapping with VLAN actions.

```
interface xe32.100 switchport
  encapsulation dot1q 10
  rewrite translate 1-to-1 0x8100 100
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure an ingress-mapping with VLAN actions.

```
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe32</name>
    <config>
      <name>xe32</name>
    </config>
  </interface>
  <interface>
    <name>xe32.100</name>
    <config>
      <name>xe32.100</name>
      <enable-switchport />
    </config>
    <extended xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-extended">
      <subinterface-encapsulation>
        <single-tag-vlan-matches>
          <single-tag-vlan-match>
            <encapsulation-type>dot1q</encapsulation-type>
            <config>
              <encapsulation-type>dot1q</encapsulation-type>
              <outer-vlan-id>10</outer-vlan-id>
            </config>
          </single-tag-vlan-match>
        </single-tag-vlan-matches>
        <rewrite>
          <config>
            <vlan-action>translate</vlan-action>
            <rewrite-translate-action>1-to-1</rewrite-translate-action>
            <dot1q-dot1ad-tpid>0x8100</dot1q-dot1ad-tpid>
            <outer-vlan-id>100</outer-vlan-id>
          </config>
        </rewrite>
      </subinterface-encapsulation>
    </extended>
  </interface>
</interfaces>
```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about ingress-mapping with VLAN actions, PUSH, POP and SWAP.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
```

```

<interface>
  <name>xe32</name>
  <config>
    <name>xe32</name>
  </config>
  <subinterfaces>
    <subinterface>
      <index>100</index>
      <config>
        <index>100</index>
      </config>
      <state>
        <name>xe32.100</name>
        <logical>true</logical>
        <oper-status>DOWN</oper-status>
        <ifindex>328728676</ifindex>
        <counters>
          <last-clear>0</last-clear>
          <out-pkts>0</out-pkts>
          <out-octets>0</out-octets>
          <in-pkts>0</in-pkts>
          <in-octets>0</in-octets>
        </counters>
      </state>
      <vlan xmlns="http://openconfig.net/yang/vlan">
        <ingress-mapping>
          <config>
            <vlan-stack-action>SWAP</vlan-stack-action>
            <tpid
              xmlns:oc-vlan-types="http://openconfig.net/yang/vlan-
types">oc-vlan-types:TPID_0X8100</tpid>
              <vlan-id>100</vlan-id>
            </config>
          <state>
            <vlan-stack-action>SWAP</vlan-stack-action>
            <tpid
              xmlns:oc-vlan-types="http://openconfig.net/yang/vlan-
types">oc-vlan-types:TPID_0X8100</tpid>
              <vlan-id>100</vlan-id>
            </state>
          </ingress-mapping>
          <match>
            <single-tagged-list>
              <config>
                <vlan-ids>10</vlan-ids>
              </config>
              <state>
                <vlan-ids>10</vlan-ids>
              </state>
            </single-tagged-list>
          </match>
        </vlan>
      </subinterface>
    </subinterfaces>
  </interface>
</interfaces>

```

Restrictions

Match is optional only for VLAN action PUSH. If not used, it will set encapsulation default in OcNOS.

Trunk VLANs in interface

This XML configuration snippet is used to configure a trunk VLAN range in an interface.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure a trunk VLAN range in an interface.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>1</name>
    <config>
      <name>1</name>
      <type xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
      <bridge-protocol xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-
ni-augments">ieee-vlan-bridge</bridge-protocol>
    </config>
    <vlans>
      <vlan>
        <vlan-id>350</vlan-id>
        <config>
          <vlan-id>350</vlan-id>
          <status>ACTIVE</status>
        </config>
      </vlan>
      <vlan>
        <vlan-id>351</vlan-id>
        <config>
          <vlan-id>351</vlan-id>
          <status>ACTIVE</status>
        </config>
      </vlan>
      <vlan>
        <vlan-id>352</vlan-id>
        <config>
          <vlan-id>352</vlan-id>
          <status>ACTIVE</status>
        </config>
      </vlan>
    </vlans>
    <interfaces>
      <interface>
        <id>xe7</id>
        <config>
```

```

        <interface>xe7</interface>
        <id>xe7</id>
    </config>
</interface>
</interfaces>
</network-instance>
</network-instances>
<interfaces xmlns="http://openconfig.net/yang/interfaces">
    <interface>
        <name>xe7</name>
        <config>
            <name>xe7</name>
            <tpid xmlns="http://openconfig.net/yang/vlan">TPID_0X8100</tpid>
            <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
        </config>
        <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
            <switched-vlan xmlns="http://openconfig.net/yang/vlan">
                <config>
                    <interface-mode>TRUNK</interface-mode>
                    <trunk-vlans>350..352</trunk-vlans>
                </config>
            </switched-vlan>
        </ethernet>
    </interface>
</interfaces>

```

OcNOS CLI Command

The below CLI command is used to configure a trunk VLAN range in an interface.

```

bridge 1 protocol ieee vlan-bridge
!
vlan database
vlan 350-352 bridge 1 state enable
!
interface xe7
switchport
dot1ad ethertype 0x8100
bridge-group 1
switchport mode trunk
switchport trunk allowed vlan add 350-352

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure a trunk VLAN range in an interface.

```

<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-
network-instance">
    <network-instance>
        <instance-name>1</instance-name>
        <instance-type>l2ni</instance-type>
        <bridge xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bridge">
            <config>
                <protocol>ieee-vlan-bridge</protocol>
            </config>
            <vlans xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vlan">

```

```

    <vlan>
      <vlan-id>350</vlan-id>
      <config>
        <vlan-id>350</vlan-id>
      </config>
      <customer-vlan>
        <config>
          <state>enable</state>
        </config>
      </customer-vlan>
    </vlan>
    <vlan>
      <vlan-id>351</vlan-id>
      <config>
        <vlan-id>351</vlan-id>
      </config>
      <customer-vlan>
        <config>
          <state>enable</state>
        </config>
      </customer-vlan>
    </vlan>
    <vlan>
      <vlan-id>352</vlan-id>
      <config>
        <vlan-id>352</vlan-id>
      </config>
      <customer-vlan>
        <config>
          <state>enable</state>
        </config>
      </customer-vlan>
    </vlan>
  </vlangs>
  <bridge-ports>
    <interface>
      <name>xe7</name>
      <config>
        <name>xe7</name>
      </config>
    </interface>
  </bridge-ports>
</bridge>
<config>
  <instance-name>1</instance-name>
  <instance-type>l2ni</instance-type>
</config>
</network-instance>
</network-instances>
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe7</name>
    <config>
      <name>xe7</name>
      <dot1ad-ether-type>0x8100</dot1ad-ether-type>
      <enable-switchport />
    </config>

```

```

vlan">
    <port-vlan xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-port-
    <switched-vlan>
        <interface-mode>trunk</interface-mode>
        <config>
            <interface-mode>trunk</interface-mode>
        </config>
        <allowed-vlan>
            <config>
                <allowed-vlan-id>350-352</allowed-vlan-id>
            </config>
        </allowed-vlan>
    </switched-vlan>
</port-vlan>
</interface>
</interfaces>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about the trunk VLAN range in an interface.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>1</name>
    <config>
      <name>1</name>
      <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
      <bridge-protocol xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-
ni-augments">ieee-vlan-bridge</bridge-protocol>
    </config>
    <state>
      <name>1</name>
      <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
    </state>
    <fdb>
      <config>
        <mac-learning>true</mac-learning>
      </config>
    </fdb>
    <interfaces>
      <interface>
        <id>xe7</id>
        <config>
          <id>xe7</id>
          <interface>xe7</interface>
        </config>
        <state>
          <id>xe7</id>
          <interface>xe7</interface>
        </state>
      </interface>
    </interfaces>
  </network-instance>
</network-instances>

```

```
<vlan>
  <vlan-id>350</vlan-id>
  <config>
    <vlan-id>350</vlan-id>
    <status>ACTIVE</status>
  </config>
  <state>
    <vlan-id>350</vlan-id>
    <status>ACTIVE</status>
  </state>
  <members>
    <member>
      <state>
        <interface>xe7</interface>
      </state>
    </member>
  </members>
</vlan>
<vlan>
  <vlan-id>351</vlan-id>
  <config>
    <vlan-id>351</vlan-id>
    <status>ACTIVE</status>
  </config>
  <state>
    <vlan-id>351</vlan-id>
    <status>ACTIVE</status>
  </state>
  <members>
    <member>
      <state>
        <interface>xe7</interface>
      </state>
    </member>
  </members>
</vlan>
<vlan>
  <vlan-id>352</vlan-id>
  <config>
    <vlan-id>352</vlan-id>
    <status>ACTIVE</status>
  </config>
  <state>
    <vlan-id>352</vlan-id>
    <status>ACTIVE</status>
  </state>
  <members>
    <member>
      <state>
        <interface>xe7</interface>
      </state>
    </member>
  </members>
</vlan>
</vlans>
</network-instance>
</network-instances>
```

```

<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe7</name>
    <config>
      <name>xe7</name>
      <tpid xmlns="http://openconfig.net/yang/vlan" xmlns:oc-vlan-
types="http://openconfig.net/yang/vlan-types">oc-vlan-types:TPID_0X8100</tpid>
      <type
xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <state>
      <name>xe7</name>
      <tpid xmlns="http://openconfig.net/yang/vlan" xmlns:oc-vlan-
types="http://openconfig.net/yang/vlan-types">oc-vlan-types:TPID_0X8100</tpid>
      <logical>false</logical>
      <last-change>318900</last-change>
      <oper-status>UP</oper-status>
      <admin-status>UP</admin-status>
      <ifindex>5007</ifindex>
      <counters>
        <last-clear>1642442144</last-clear>
        <out-errors>0</out-errors>
        <out-discards>0</out-discards>
        <out-multicast-pkts>145</out-multicast-pkts>
        <out-broadcast-pkts>0</out-broadcast-pkts>
        <out-unicast-pkts>0</out-unicast-pkts>
        <out-pkts>145</out-pkts>
        <out-octets>9412</out-octets>
        <in-fcs-errors>0</in-fcs-errors>
        <in-errors>0</in-errors>
        <in-discards>0</in-discards>
        <in-multicast-pkts>0</in-multicast-pkts>
        <in-broadcast-pkts>0</in-broadcast-pkts>
        <in-unicast-pkts>0</in-unicast-pkts>
        <in-pkts>0</in-pkts>
        <in-octets>0</in-octets>
      </counters>
      <type
xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </state>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
      <state>
        <negotiated-port-speed
xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_1GB</negotiated-port-speed>
        <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
        <hw-mac-address>b8:6a:97:c3:64:44</hw-mac-address>
        <counters>
          <in-crc-errors>0</in-crc-errors>
          <in-jabber-frames>0</in-jabber-frames>
          <in-fragment-frames>0</in-fragment-frames>
          <in-oversize-frames>0</in-oversize-frames>
        </counters>
      </state>
      <switched-vlan xmlns="http://openconfig.net/yang/vlan">
        <config>

```



```

        <interface-mode>TRUNK</interface-mode>
        <trunk-vlans>350..352</trunk-vlans>
    </config>
    <state>
        <interface-mode>TRUNK</interface-mode>
        <trunk-vlans>350..352</trunk-vlans>
    </state>
</switched-vlan>
</ethernet>
<subinterfaces>
    <subinterface>
        <index>0</index>
        <config>
            <index>0</index>
        </config>
    </subinterface>
</subinterfaces>
</interface>
</interfaces>

```

Restrictions

VLANs associated to trunk interface must also be created and bridge must be associated to the interface.

Trunk interface with native VLAN

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure a native VLAN for a trunk VLAN interface.

```

<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe7</name>
    <config>
      <name>xe7</name>
      <tpid xmlns="http://openconfig.net/yang/vlan">TPID_0X8100</tpid>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
      <switched-vlan xmlns="http://openconfig.net/yang/vlan">
        <config>
          <interface-mode>TRUNK</interface-mode>
          <trunk-vlans>350..352</trunk-vlans>
          <native-vlan>351</native-vlan>
        </config>
      </switched-vlan>
    </ethernet>
  </interface>

```

```
</interfaces>
```

OcNOS CLI Command

The below CLI command is used to configure a native VLAN for a trunk VLAN interface.

```
interface xe7
  switchport
  dot1ad ethertype 0x8100
  bridge-group 1
  switchport mode trunk
  switchport trunk allowed vlan add 350-352
  switchport trunk native vlan 351
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure a native VLAN for a trunk VLAN interface.

```
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xe7</name>
    <config>
      <name>xe7</name>
      <dot1ad-ether-type>0x8100</dot1ad-ether-type>
      <enable-switchport />
    </config>
    <port-vlan xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-port-
vlan">
      <switched-vlan>
        <interface-mode>trunk</interface-mode>
        <config>
          <interface-mode>trunk</interface-mode>
        </config>
        <allowed-vlan>
          <config>
            <allowed-vlan-id>350-352</allowed-vlan-id>
          </config>
        </allowed-vlan>
        <vlans>
          <config>
            <native-vlan-id>351</native-vlan-id>
          </config>
        </vlans>
      </switched-vlan>
    </port-vlan>
  </interface>
</interfaces>
```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about native VLAN for trunk VLAN interface.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe7</name>
    <config>
```

```

        <name>xe7</name>
        <tpid xmlns="http://openconfig.net/yang/vlan" xmlns:oc-vlan-
types="http://openconfig.net/yang/vlan-types">oc-vlan-types:TPID_0X8100</tpid>
        <type
xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
        </config>
        <state>
        <name>xe7</name>
        <tpid xmlns="http://openconfig.net/yang/vlan" xmlns:oc-vlan-
types="http://openconfig.net/yang/vlan-types">oc-vlan-types:TPID_0X8100</tpid>
        <logical>false</logical>
        <last-change>318900</last-change>
        <oper-status>UP</oper-status>
        <admin-status>UP</admin-status>
        <ifindex>5007</ifindex>
        <counters>
        <last-clear>1642442144</last-clear>
        <out-errors>0</out-errors>
        <out-discards>0</out-discards>
        <out-multicast-pkts>374</out-multicast-pkts>
        <out-broadcast-pkts>0</out-broadcast-pkts>
        <out-unicast-pkts>0</out-unicast-pkts>
        <out-pkts>374</out-pkts>
        <out-octets>24068</out-octets>
        <in-fcs-errors>0</in-fcs-errors>
        <in-errors>0</in-errors>
        <in-discards>0</in-discards>
        <in-multicast-pkts>0</in-multicast-pkts>
        <in-broadcast-pkts>0</in-broadcast-pkts>
        <in-unicast-pkts>0</in-unicast-pkts>
        <in-pkts>0</in-pkts>
        <in-octets>0</in-octets>
        </counters>
        <type
xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
        </state>
        <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
        <state>
        <negotiated-port-speed
xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_1GB</negotiated-port-speed>
        <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
        <hw-mac-address>b8:6a:97:c3:64:44</hw-mac-address>
        <counters>
        <in-crc-errors>0</in-crc-errors>
        <in-jabber-frames>0</in-jabber-frames>
        <in-fragment-frames>0</in-fragment-frames>
        <in-oversize-frames>0</in-oversize-frames>
        </counters>
        </state>
        <switched-vlan xmlns="http://openconfig.net/yang/vlan">
        <config>
        <interface-mode>TRUNK</interface-mode>
        <native-vlan>351</native-vlan>
        <trunk-vlans>350..352</trunk-vlans>
        </config>

```

```
<state>
  <interface-mode>TRUNK</interface-mode>
  <native-vlan>351</native-vlan>
  <trunk-vlans>350..352</trunk-vlans>
</state>
</switched-vlan>
</ethernet>
<subinterfaces>
  <subinterface>
    <index>0</index>
    <config>
      <index>0</index>
    </config>
  </subinterface>
</subinterfaces>
</interface>
</interfaces>
```

Restrictions

VLANs associated to trunk interface must also be created and bridge must be associated to the interface.

Access VLAN in interface

This XML configuration snippet is used to configure an access VLAN in an interface.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure an access VLAN in an interface.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>1</name>
    <config>
      <name>1</name>
      <type xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
      <bridge-protocol xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-
ni-augments">ieee-vlan-bridge</bridge-protocol>
    </config>
    <vlans>
      <vlan>
        <vlan-id>300</vlan-id>
        <config>
          <vlan-id>300</vlan-id>
          <status>ACTIVE</status>
        </config>
      </vlan>
    </vlans>
  </network-instance>
</network-instances>
```

```

    <interfaces>
      <interface>
        <id>xel6</id>
        <config>
          <interface>xel6</interface>
          <id>xel6</id>
        </config>
      </interface>
    </interfaces>
  </network-instance>
</network-instances>
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xel6</name>
    <config>
      <name>xel6</name>
      <type
xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
      <switched-vlan xmlns="http://openconfig.net/yang/vlan">
        <config>
          <interface-mode>ACCESS</interface-mode>
          <access-vlan>300</access-vlan>
        </config>
      </switched-vlan>
    </ethernet>
  </interface>
</interfaces>

```

OcNOS CLI command

The below CLI command is used to configure an access VLAN in an interface.

```

interface xel6
switchport
bridge-group 1
switchport mode access
switchport access vlan 300

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure an access VLAN in an interface.

```

<network-instance>
  <instance-name>1</instance-name>
  <instance-type>l2ni</instance-type>
  <bridge xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bridge">
    <config>
      <protocol>ieee-vlan-bridge</protocol>
    </config>
  <vlans xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vlan">
    <vlan>
      <vlan-id>300</vlan-id>
    </vlan>
  </vlans>
</network-instance>

```

```

        <vlan-id>300</vlan-id>
      </config>
    <customer-vlan>
      <config>
        <state>enable</state>
      </config>
    </customer-vlan>
  </vlan>
</vlangs>
<bridge-ports>
  <interface>
    <name>xel6</name>
    <config>
      <name>xel6</name>
    </config>
  </interface>
</bridge-ports>
</bridge>
<config>
  <instance-name>1</instance-name>
  <instance-type>l2ni</instance-type>
</config>
</network-instance>
</network-instances>
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>xel6</name>
    <config>
      <name>xel6</name>
      <enable-switchport />
    </config>
    <port-vlan xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-port-
vlan">
      <switched-vlan>
        <interface-mode>access</interface-mode>
        <config>
          <interface-mode>access</interface-mode>
        </config>
      <vlangs>
        <config>
          <vlan-id>300</vlan-id>
        </config>
      </vlangs>
    </switched-vlan>
  </port-vlan>
</interface>
</interfaces>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about configuring an access VLAN in an interface.

```

<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xel6</name>
    <config>

```

```

    <name>xe16</name>
    <type
      xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <state>
      <name>xe16</name>
      <logical>false</logical>
      <last-change>557400</last-change>
      <oper-status>DOWN</oper-status>
      <admin-status>UP</admin-status>
      <ifindex>5016</ifindex>
      <counters>
        <last-clear>1642444529</last-clear>
        <out-errors>0</out-errors>
        <out-discards>0</out-discards>
        <out-multicast-pkts>0</out-multicast-pkts>
        <out-broadcast-pkts>0</out-broadcast-pkts>
        <out-unicast-pkts>0</out-unicast-pkts>
        <out-pkts>0</out-pkts>
        <out-octets>0</out-octets>
        <in-fcs-errors>0</in-fcs-errors>
        <in-errors>0</in-errors>
        <in-discards>0</in-discards>
        <in-multicast-pkts>0</in-multicast-pkts>
        <in-broadcast-pkts>0</in-broadcast-pkts>
        <in-unicast-pkts>0</in-unicast-pkts>
        <in-pkts>0</in-pkts>
        <in-octets>0</in-octets>
      </counters>
    </type>
    xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
  </state>
  <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
    <state>
      <negotiated-port-speed
        xmlns:oc-eth="http://openconfig.net/yang/interfaces/
ethernet">oc-eth:SPEED_10GB</negotiated-port-speed>
      <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
      <hw-mac-address>b8:6a:97:c3:64:4d</hw-mac-address>
      <counters>
        <in-crc-errors>0</in-crc-errors>
        <in-jabber-frames>0</in-jabber-frames>
        <in-fragment-frames>0</in-fragment-frames>
        <in-oversize-frames>0</in-oversize-frames>
      </counters>
    </state>
  <switched-vlan xmlns="http://openconfig.net/yang/vlan">
    <config>
      <interface-mode>ACCESS</interface-mode>
      <access-vlan>300</access-vlan>
    </config>
    <state>
      <interface-mode>ACCESS</interface-mode>
      <access-vlan>300</access-vlan>
    </state>
  </switched-vlan>

```

```

    </switched-vlan>
  </ethernet>
  <subinterfaces>
    <subinterface>
      <index>0</index>
      <config>
        <index>0</index>
      </config>
    </subinterface>
  </subinterfaces>
</interface>
</interfaces>

```

Restrictions

VLAN associated to access interface must also be created and bridge must be associated to the interface.

Trunk VLANs in link aggregation interface

This XML configuration snippet is used to configure a trunk VLAN range in a link aggregation interface.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure a trunk VLAN range in a link aggregation interface.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>1</name>
    <config>
      <name>1</name>
      <type xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
      <bridge-protocol xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-
ni-augments">ieee-vlan-bridge</bridge-protocol>
    </config>
    <fdb>
      <config>
        <mac-learning>true</mac-learning>
      </config>
    </fdb>
    <vlans>
      <vlan>
        <vlan-id>300</vlan-id>
      </vlan>
    </vlans>
  </network-instance>
</network-instances>

```



```

    <interfaces>
      <interface>
        <id>sa3</id>
        <config>
          <interface>sa3</interface>
          <id>sa3</id>
        </config>
      </interface>
    </interfaces>
  </network-instance>
</network-instances>
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>sa3</name>
    <config>
      <name>sa3</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ieee8023adLag</type>
    </config>
    <aggregation xmlns="http://openconfig.net/yang/interfaces/aggregate">
      <switched-vlan xmlns="http://openconfig.net/yang/vlan">
        <config>
          <interface-mode>TRUNK</interface-mode>
          <trunk-vlans>300</trunk-vlans>
        </config>
      </switched-vlan>
    </config>
    <lag-type>STATIC</lag-type>
  </aggregation>
</interface>
</interfaces>

```

OcNOS CLI Command

The below CLI command is used to configure a trunk VLAN range in a link aggregation interface.

```

interface sa3
  switchport
  bridge-group 1
  switchport mode trunk
  switchport trunk allowed vlan add 300

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure a trunk VLAN range in a link aggregation interface.

```

<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-
network-instance">
  <network-instance>
    <instance-name>1</instance-name>
    <instance-type>l2ni</instance-type>
    <bridge xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bridge">
      <config>
        <protocol>ieee-vlan-bridge</protocol>

```

```

    </config>
    <vlans xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vlan">
      <vlan>
        <vlan-id>300</vlan-id>
        <config>
          <vlan-id>300</vlan-id>
        </config>
        <customer-vlan>
          <config>
            <state>enable</state>
          </config>
        </customer-vlan>
      </vlan>
    </vlans>
    <bridge-ports>
      <interface>
        <name>sa3</name>
        <config>
          <name>sa3</name>
        </config>
      </interface>
    </bridge-ports>
  </bridge>
  <config>
    <instance-name>1</instance-name>
    <instance-type>l2ni</instance-type>
  </config>
</network-instance>
</network-instances>
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>sa3</name>
    <config>
      <name>sa3</name>
      <enable-switchport />
    </config>
    <port-vlan xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-port-
vlan">
      <switched-vlan>
        <interface-mode>trunk</interface-mode>
        <config>
          <interface-mode>trunk</interface-mode>
        </config>
        <allowed-vlan>
          <config>
            <allowed-vlan-id>300</allowed-vlan-id>
          </config>
        </allowed-vlan>
      </switched-vlan>
    </port-vlan>
  </interface>
</interfaces>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about configuring trunk VLAN range in a link aggregation interface.

```
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>sa3</name>
    <config>
      <name>sa3</name>
      <type
type">ianaift:ieee8023adLag</type>
        xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
        type">ianaift:ieee8023adLag</type>
      </config>
      <state>
        <name>sa3</name>
        <logical>false</logical>
        <last-change>851000</last-change>
        <oper-status>DOWN</oper-status>
        <admin-status>UP</admin-status>
        <ifindex>200003</ifindex>
        <counters>
          <last-clear>1642447466</last-clear>
          <out-errors>0</out-errors>
          <out-discards>0</out-discards>
          <out-multicast-pkts>0</out-multicast-pkts>
          <out-broadcast-pkts>0</out-broadcast-pkts>
          <out-unicast-pkts>0</out-unicast-pkts>
          <out-pkts>0</out-pkts>
          <out-octets>0</out-octets>
          <in-fcs-errors>0</in-fcs-errors>
          <in-errors>0</in-errors>
          <in-discards>0</in-discards>
          <in-multicast-pkts>0</in-multicast-pkts>
          <in-broadcast-pkts>0</in-broadcast-pkts>
          <in-unicast-pkts>0</in-unicast-pkts>
          <in-pkts>0</in-pkts>
          <in-octets>0</in-octets>
        </counters>
      </state>
      <type
type">ianaift:ieee8023adLag</type>
        xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
        type">ianaift:ieee8023adLag</type>
      </type>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
      <state>
        <negotiated-port-speed
ethernet">oc-eth:SPEED_UNKNOWN</negotiated-port-speed>
          xmlns:oc-eth="http://openconfig.net/yang/interfaces/
          ethernet">oc-eth:SPEED_UNKNOWN</negotiated-port-speed>
        <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
        <hw-mac-address>0e:00:00:00:00:01</hw-mac-address>
        <counters>
          <in-crc-errors>0</in-crc-errors>
          <in-jabber-frames>0</in-jabber-frames>
          <in-fragment-frames>0</in-fragment-frames>
          <in-oversize-frames>0</in-oversize-frames>
        </counters>
      </state>
    </ethernet>
  </interface>
</interfaces>
```

```
    </state>
  </ethernet>
  <subinterfaces>
    <subinterface>
      <index>0</index>
      <config>
        <index>0</index>
      </config>
    </subinterface>
  </subinterfaces>
  <aggregation xmlns="http://openconfig.net/yang/interfaces/aggregate">
    <switched-vlan xmlns="http://openconfig.net/yang/vlan">
      <config>
        <interface-mode>TRUNK</interface-mode>
        <trunk-vlans>300</trunk-vlans>
      </config>
      <state>
        <interface-mode>TRUNK</interface-mode>
        <trunk-vlans>300</trunk-vlans>
      </state>
    </switched-vlan>
    <config>
      <lag-type>STATIC</lag-type>
    </config>
    <state>
      <lag-type>STATIC</lag-type>
    </state>
  </aggregation>
</interface>
</interfaces>
```

Restrictions

VLANs associated to trunk LAG must also be created and bridge must be associated to the LAG.

Trunk LAG with native VLAN

This XML configuration snippet is used to configure a native VLAN for a trunk VLAN link aggregation.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure a native VLAN for a trunk VLAN link aggregation.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>1</name>
    <config>
      <name>1</name>
```

```

    <type xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
    <bridge-protocol xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-
ni-augments">ieee-vlan-bridge</bridge-protocol>
  </config>
  <fdb>
    <config>
      <mac-learning>true</mac-learning>
    </config>
  </fdb>
  <vlans>
    <vlan>
      <vlan-id>300</vlan-id>
    </vlan>
  </vlans>
  <config>
    <vlan-id>300</vlan-id>
    <status>ACTIVE</status>
  </config>
  </vlan>
</vlans>
  <interfaces>
    <interface>
      <id>pol</id>
      <config>
        <interface>pol</interface>
        <id>pol</id>
      </config>
    </interface>
  </interfaces>
</network-instance>
</network-instances>
<interfaces xmlns="http://openconfig.net/yang/interfaces">
<interface>
  <name>pol</name>
  <config>
    <name>pol</name>
    <tpid xmlns="http://openconfig.net/yang/vlan">TPID_0X8100</tpid>
    <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ieee8023adLag</type>
  </config>
  <aggregation xmlns="http://openconfig.net/yang/interfaces/aggregate">
    <switched-vlan xmlns="http://openconfig.net/yang/vlan">
      <config>
        <interface-mode>TRUNK</interface-mode>
        <native-vlan>300</native-vlan>
        <trunk-vlans>300</trunk-vlans>
      </config>
    </switched-vlan>
    <config>
      <lag-type>LACP</lag-type>
    </config>
  </aggregation>
</interface>
</interfaces>

```

OcNOS CLI Command

The below CLI command is used to configure a native VLAN for a trunk VLAN link aggregation.

```

interface pol
  switchport
  dot1ad ethertype 0x8100
  bridge-group 1
  switchport mode trunk
  switchport trunk allowed vlan add 300
  switchport trunk native vlan 300

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure a native VLAN for a trunk VLAN link aggregation.

```

<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-
network-instance">
  <network-instance>
    <instance-name>1</instance-name>
    <instance-type>l2ni</instance-type>
    <bridge xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bridge">
      <config>
        <protocol>ieee-vlan-bridge</protocol>
      </config>
      <vlans xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vlan">
        <vlan>
          <vlan-id>300</vlan-id>
          <config>
            <vlan-id>300</vlan-id>
          </config>
          <customer-vlan>
            <config>
              <state>enable</state>
            </config>
          </customer-vlan>
        </vlan>
      </vlans>
      <bridge-ports>
        <interface>
          <name>pol</name>
          <config>
            <name>pol</name>
          </config>
        </interface>
      </bridge-ports>
    </bridge>
    <config>
      <instance-name>1</instance-name>
      <instance-type>l2ni</instance-type>
    </config>
  </network-instance>
</network-instances>
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>pol</name>
    <config>
      <name>pol</name>
      <dot1ad-ether-type>0x8100</dot1ad-ether-type>
      <enable-switchport />
    </config>
  </interface>
</interfaces>

```

```

vlan">
  <port-vlan xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-port-
    <switched-vlan>
      <interface-mode>trunk</interface-mode>
      <config>
        <interface-mode>trunk</interface-mode>
      </config>
      <vlangs>
        <config>
          <native-vlan-id>300</native-vlan-id>
        </config>
      </vlangs>
      <allowed-vlan>
        <config>
          <allowed-vlan-id>300</allowed-vlan-id>
        </config>
      </allowed-vlan>
    </switched-vlan>
  </port-vlan>
</interface>
</interfaces>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about configuring a native VLAN for a trunk VLAN link aggregation.

```

<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>pol</name>
    <config>
      <name>pol</name>
      <tpid xmlns="http://openconfig.net/yang/vlan" xmlns:oc-vlan-
types="http://openconfig.net/yang/vlan-types">oc-vlan-types:TPID_0X8100</tpid>
      <type
xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ieee8023adLag</type>
    </config>
    <state>
      <name>pol</name>
      <tpid xmlns="http://openconfig.net/yang/vlan" xmlns:oc-vlan-
types="http://openconfig.net/yang/vlan-types">oc-vlan-types:TPID_0X8100</tpid>
      <logical>false</logical>
      <last-change>897000</last-change>
      <oper-status>DOWN</oper-status>
      <admin-status>UP</admin-status>
      <ifindex>100001</ifindex>
      <counters>
        <last-clear>1642447926</last-clear>
        <out-errors>0</out-errors>
        <out-discards>0</out-discards>
        <out-multicast-pkts>0</out-multicast-pkts>
        <out-broadcast-pkts>0</out-broadcast-pkts>
        <out-unicast-pkts>0</out-unicast-pkts>
        <out-pkts>0</out-pkts>
        <out-octets>0</out-octets>
        <in-fcs-errors>0</in-fcs-errors>
      </counters>
    </state>
  </interface>
</interfaces>

```

```

        <in-errors>0</in-errors>
        <in-discards>0</in-discards>
        <in-multicast-pkts>0</in-multicast-pkts>
        <in-broadcast-pkts>0</in-broadcast-pkts>
        <in-unicast-pkts>0</in-unicast-pkts>
        <in-pkts>0</in-pkts>
        <in-octets>0</in-octets>
    </counters>
    <type
type">ianaift:ieee8023adLag</type>
    </state>
    <ethernet xmlns="http://openconfig.net/yang/interfaces/ethernet">
    <state>
        <negotiated-port-speed
ethernet">oc-eth:SPEED_UNKNOWN</negotiated-port-speed>
        <negotiated-duplex-mode>FULL</negotiated-duplex-mode>
        <hw-mac-address>0e:00:00:00:01</hw-mac-address>
        <counters>
            <in-crc-errors>0</in-crc-errors>
            <in-jabber-frames>0</in-jabber-frames>
            <in-fragment-frames>0</in-fragment-frames>
            <in-oversize-frames>0</in-oversize-frames>
        </counters>
    </state>
    </ethernet>
    <subinterfaces>
        <subinterface>
            <index>0</index>
            <config>
                <index>0</index>
            </config>
        </subinterface>
    </subinterfaces>
    <aggregation xmlns="http://openconfig.net/yang/interfaces/aggregate">
        <switched-vlan xmlns="http://openconfig.net/yang/vlan">
            <config>
                <interface-mode>TRUNK</interface-mode>
                <native-vlan>300</native-vlan>
                <trunk-vlans>300</trunk-vlans>
            </config>
            <state>
                <interface-mode>TRUNK</interface-mode>
                <native-vlan>300</native-vlan>
                <trunk-vlans>300</trunk-vlans>
            </state>
        </switched-vlan>
        <config>
            <lag-type>LACP</lag-type>
        </config>
        <state>
            <lag-type>LACP</lag-type>
        </state>
    </aggregation>
    </interface>
</interfaces>

```

Restrictions

VLANs associated to trunk interface must also be created and bridge must be associated to the interface.

Creation of a cross connect

This XML configuration snippet is used to create a cross connect between 2 subinterfaces.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create a cross connect between 2 subinterfaces.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>test3</name>
    <config>
      <name>test3</name>
      <type xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">L2P2P</type>
<description>Test XConnection</description>
    </config>
    <interfaces>
      <interface>
        <id>xe7.10</id>
        <config>
          <id>xe7.10</id>
          <interface>xe7</interface>
          <subinterface>10</subinterface>
        </config>
      </interface>
      <interface>
        <id>xe8.20</id>
        <config>
          <id>xe8.20</id>
          <interface>xe8</interface>
          <subinterface>20</subinterface>
        </config>
      </interface>
    </interfaces>
  </network-instance>
</network-instances>
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe7</name>
    <config>
      <name>xe7</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
```

```

    <subinterfaces>
      <subinterface>
        <index>10</index>
        <config>
          <index>10</index>
        </config>
        <vlan xmlns="http://openconfig.net/yang/vlan">
          <match>
            <single-tagged-list>
              <config>
                <vlan-ids>10</vlan-ids>
              </config>
            </single-tagged-list>
          </match>
        </vlan>
      </subinterface>
    </subinterfaces>
  </interface>
  <interface>
    <name>xe8</name>
    <config>
      <name>xe8</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-type">ianaift:ethernetCsmacd</type>
    </config>
    <subinterfaces>
      <subinterface>
        <index>20</index>
        <config>
          <index>20</index>
        </config>
        <vlan xmlns="http://openconfig.net/yang/vlan">
          <match>
            <single-tagged-list>
              <config>
                <vlan-ids>10</vlan-ids>
              </config>
            </single-tagged-list>
          </match>
        </vlan>
      </subinterface>
    </subinterfaces>
  </interface>
</interfaces>

```

OcNOS CLI Command

The below CLI command is used to create a cross connect between 2 subinterfaces.

```

interface xe7.10 switchport
  encapsulation dot1q 10
!
interface xe8.20 switchport
  encapsulation dot1q 10
!
cross-connect test3
  description Test XConnection

```

```
interface xe7.10
interface xe8.20
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to create a cross connect between 2 subinterfaces.

```
<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-network-
instance">
  <network-instance>
    <instance-name>test3</instance-name>
    <instance-type>cross-connect</instance-type>
    <config>
      <instance-name>test3</instance-name>
      <instance-type>cross-connect</instance-type>
    </config>
    <cross-connect xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-cross-
connect">
      <config>
        <xc-name>test3</xc-name>
        <description>Test XConnection</description>
      </config>
      <cross-connect-interfaces>
        <cross-connect-interface>
          <endpoint-if>eth7.10</endpoint-if>
          <config>
            <endpoint-if>eth7.10</endpoint-if>
          </config>
        </cross-connect-interface>
        <cross-connect-interface>
          <endpoint-if>eth8.20</endpoint-if>
          <config>
            <endpoint-if>eth8.20</endpoint-if>
          </config>
        </cross-connect-interface>
      </cross-connect-interfaces>
    </cross-connect>
  </network-instance>
</network-instances>
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>
    <name>eth7.10</name>
    <config>
      <name>eth7.10</name>
      <enable-switchport/>
    </config>
    <extended xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-extended">
      <subinterface-encapsulation>
        <single-tag-vlan-matches>
          <single-tag-vlan-match>
            <encapsulation-type>dot1q</encapsulation-type>
            <config>
              <encapsulation-type>dot1q</encapsulation-type>
              <outer-vlan-id>10</outer-vlan-id>
            </config>
          </single-tag-vlan-match>
        </single-tag-vlan-matches>
      </subinterface-encapsulation>
    </extended>
  </interface>
</interfaces>
```

```

        </single-tag-vlan-matches>
    </subinterface-encapsulation>
</extended>
</interface>
<interface>
    <name>eth8.20</name>
    <config>
        <name>eth8.20</name>
        <enable-switchport/>
    </config>
    <extended xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-extended">
        <subinterface-encapsulation>
            <single-tag-vlan-matches>
                <single-tag-vlan-match>
                    <encapsulation-type>dot1q</encapsulation-type>
                    <config>
                        <encapsulation-type>dot1q</encapsulation-type>
                        <outer-vlan-id>10</outer-vlan-id>
                    </config>
                </single-tag-vlan-match>
            </single-tag-vlan-matches>
        </subinterface-encapsulation>
    </extended>
</interface>
</interfaces>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information on creating a cross connect between 2 subinterfaces.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
    <network-instance>
        <name>test3</name>
        <config>
            <name>test3</name>
            <type
                xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2P2P</type>
            <description>Test XConnection</description>
        </config>
        <state>
            <name>test3</name>
            <type
                xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2P2P</type>
            <description>Test XConnection</description>
        </state>
        <interfaces>
            <interface>
                <id>xe7.10</id>
                <config>
                    <id>xe7.10</id>
                    <interface>xe7</interface>
                    <subinterface>10</subinterface>
                </config>
                <state>

```

```
        <id>xe7.10</id>
        <interface>xe7</interface>
        <subinterface>10</subinterface>
    </state>
</interface>
<interface>
    <id>xe8.20</id>
    <config>
        <id>xe8.20</id>
        <interface>xe8</interface>
        <subinterface>20</subinterface>
    </config>
    <state>
        <id>xe8.20</id>
        <interface>xe8</interface>
        <subinterface>20</subinterface>
    </state>
</interface>
</interfaces>
</network-instance>
</network-instances>
```

Restrictions

- Exactly 2 subinterfaces must be configured along with network-instance creation.
- The old path for Open Config `/network-instances/network-instance/config/enabled` is not supported after Open Config v1.0.0, and without this path the Cross-Connect feature is lost in the translation for IPI path `/network-instances/network-instance/cross-connect/config/admin-disable`.

Deletion of a cross connect

This XML configuration snippet is used to delete a cross connect.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to delete a cross connect.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance operation="delete">
    <name>test3</name>
  </network-instance>
</network-instances>
```

OcNOS CLI Command

The below CLI command is used to delete a cross connect.

```
OcNOS#configure terminal
```

```
Enter configuration commands, one per line.  End with CNTL/Z.
OcNOS(config)#no cross-connect test3
OcNOS(config)#commit
OcNOS#show running-config cross-connect
!
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to delete a cross connect.

```
<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-
network-instance">
  <network-instance operation="delete">
    <instance-name>test3</instance-name>
    <instance-type>cross-connect</instance-type>
  </network-instance>
</network-instances>
```

Validation with NetConf get

Here is a NetConf validation response that provides information on deleting a cross connect.

```
<data/>
```

Restrictions

None

Configure Bridge Domain and associate L2 Subinterfaces

This XML configuration snippet is used to configure L2 Subinterface and attach to Bridge Domain.

Note: The subinterfaces are set to L2 implicitly by Bridge Domain instance translation. As a result, the subinterfaces must either be created in the same transaction as Bridge Domain or created as L2 from CLI or IPI datamodel. If the subinterfaces are created as L3, this would result in error while assigning them to a Bridge Domain instance.

Release

This configuration was introduced in OcNOS version 6.4.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure L2 Subinterface and attach to Bridge Domain.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>1</name>
    <config>
      <name>1</name>
      <type xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">L2VSI</type>
      <description>Test Bridge Domain</description>
    </config>
  </network-instance>
</network-instances>
```

```

<interfaces>
  <interface>
    <id>xe9.10</id>
    <config>
      <id>xe9.10</id>
      <interface>xe9</interface>
      <subinterface>10</subinterface>
    </config>
  </interface>
  <interface>
    <id>xe10.20</id>
    <config>
      <id>xe10.20</id>
      <interface>xe10</interface>
      <subinterface>20</subinterface>
    </config>
  </interface>
</interfaces>
</network-instance>
</network-instances>
<interfaces xmlns="http://openconfig.net/yang/interfaces">
  <interface>
    <name>xe9</name>
    <config>
      <name>xe9</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <subinterfaces>
      <subinterface>
        <index>10</index>
        <config>
          <index>10</index>
        </config>
        <vlan xmlns="http://openconfig.net/yang/vlan">
          <match>
            <single-tagged-list>
              <config>
                <vlan-ids>10</vlan-ids>
              </config>
            </single-tagged-list>
          </match>
        </vlan>
      </subinterface>
    </subinterfaces>
  </interface>
  <interface>
    <name>xe10</name>
    <config>
      <name>xe10</name>
      <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
type">ianaift:ethernetCsmacd</type>
    </config>
    <subinterfaces>
      <subinterface>
        <index>20</index>
        <config>

```

```

    <index>20</index>
  </config>
  <vlan xmlns="http://openconfig.net/yang/vlan">
    <match>
      <single-tagged-list>
        <config>
          <vlan-ids>10</vlan-ids>
        </config>
      </single-tagged-list>
    </match>
  </vlan>
</subinterface>
</subinterfaces>
</interface>
</interfaces>

```

OcNOS CLI Command

The below CLI command is used to configure L2 Subinterface and attach to Bridge Domain.

```

interface xe9.10 switchport
  encapsulation dot1q 10
!
interface xe10.20 switchport
  encapsulation dot1q 10
!
bridge-domain 1
  description Test Bridge Domain
  interface xe9.10
  interface xe10.20
!

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure L2 Subinterface and attach to Bridge Domain.

```

<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-network-
instance">
  <network-instance>
    <instance-name>1</instance-name>
    <instance-type>bridge-domain</instance-type>
    <config>
      <instance-name>1</instance-name>
      <instance-type>bridge-domain</instance-type>
    </config>
    <bridge-domain xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bridge-
domain">
      <config>
        <domain-id>1</domain-id>
        <description>Test Bridge Domain</description>
        <member-interfaces>xe9.10</member-interfaces>
        <member-interfaces>xe10.20</member-interfaces>
      </config>
    </bridge-domain>
  </network-instance>
</network-instances>
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">

```



```
<interface>
  <name>xe9.10</name>
  <config>
    <enable-switchport/>
    <name>xe9.10</name>
  </config>
  <extended xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-extended">
    <subinterface-encapsulation>
      <single-tag-vlan-matches>
        <single-tag-vlan-match>
          <encapsulation-type>dot1q</encapsulation-type>
          <config>
            <encapsulation-type>dot1q</encapsulation-type>
            <outer-vlan-id>10</outer-vlan-id>
          </config>
        </single-tag-vlan-match>
      </single-tag-vlan-matches>
    </subinterface-encapsulation>
  </extended>
</interface>
<interface>
  <name>xe10.20</name>
  <config>
    <enable-switchport/>
    <name>xe10.20</name>
  </config>
  <extended xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-if-extended">
    <subinterface-encapsulation>
      <single-tag-vlan-matches>
        <single-tag-vlan-match>
          <encapsulation-type>dot1q</encapsulation-type>
          <config>
            <encapsulation-type>dot1q</encapsulation-type>
            <outer-vlan-id>10</outer-vlan-id>
          </config>
        </single-tag-vlan-match>
      </single-tag-vlan-matches>
    </subinterface-encapsulation>
  </extended>
</interface>
<interface>
  <name>xe9</name>
  <config>
    <name>xe9</name>
  </config>
</interface>
<interface>
  <name>xe10</name>
  <config>
    <name>xe10</name>
  </config>
</interface>
</interfaces>
```

Restrictions

Bridge Domain instance name must be an integer in the range 1-2147483647.

Deletion of a Bridge Domain instance

This XML configuration snippet is used to delete a Bridge Domain instance.

Release

This configuration was introduced in OcNOS version 6.4.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to delete a Bridge Domain instance.

```
<network-instances xmlns="<http://openconfig.net/yang/network-instance">>
  <network-instance operation="delete">
    <name>1</name>
  </network-instance>
</network-instances>
```

OcNOS CLI Command

The below CLI is used to delete a Bridge Domain instance.

```
OcNOS#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
OcNOS(config)#no bridge-domain 1
OcNOS(config)#commit
OcNOS#show running-config bridge-domain
!
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to delete a Bridge Domain instance.

```
<network-instances xmlns="<http://www.ipinfusion.com/yang/ocnos/ipi-network-
instance">>
  <network-instance operation="delete">
    <instance-name>1</instance-name>
    <instance-type>bridge-domain</instance-type>
  </network-instance>
</network-instances>
```

Validation with NetConf get

Here is a NetConf validation response that provides information about deletion of a Bridge Domain instance.

```
<data/>
```

Restrictions

None

Creation of a VLAN bridge

This XML configuration snippet is used to create a VLAN bridge and assign VLANs to it.

Release

This configuration was introduced in OcNOS version 5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create a VLAN bridge and assign VLANs to it.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>1</name>
    <config>
      <name>1</name>
      <type xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
    </config>
    <vlans>
      <vlan>
        <vlan-id>401</vlan-id>
        <config>
          <vlan-id>401</vlan-id>
          <name>VLAN-401</name>
          <status>ACTIVE</status>
        </config>
      </vlan>
      <vlan>
        <vlan-id>501</vlan-id>
        <config>
          <vlan-id>501</vlan-id>
          <name>VLAN-501</name>
          <status>ACTIVE</status>
        </config>
      </vlan>
    </vlans>
  </network-instance>
</network-instances>
```

OcNOS CLI Command

The below CLI command is used to create a VLAN bridge and assign VLANs to it.

```
bridge 1 protocol ieee vlan-bridge
!
vlan database
vlan 401 bridge 1 name VLAN-401 state enable
```

```
vlan 501 bridge 1 name VLAN-501 state enable
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to create a VLAN bridge and assign VLANs to it.

```
<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-
network-instance">
  <network-instance>
    <instance-name>1</instance-name>
    <instance-type>l2ni</instance-type>
    <bridge xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bridge">
      <config>
        <protocol>ieee-vlan-bridge</protocol>
      </config>
    <vlans xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vlan">
      <vlan>
        <vlan-id>401</vlan-id>
        <config>
          <vlan-id>401</vlan-id>
        </config>
        <customer-vlan>
          <config>
            <name>VLAN-401</name>
            <state>enable</state>
          </config>
        </customer-vlan>
      </vlan>
      <vlan>
        <vlan-id>501</vlan-id>
        <config>
          <vlan-id>501</vlan-id>
        </config>
        <customer-vlan>
          <config>
            <name>VLAN-501</name>
            <state>enable</state>
          </config>
        </customer-vlan>
      </vlan>
    </vlans>
  </bridge>
</config>
  <instance-name>1</instance-name>
  <instance-type>l2ni</instance-type>
</config>
</network-instance>
</network-instances>
```

Validation with NetConf get

Here is a NetConf validation response that provides information about creating a VLAN bridge and assigning VLANs.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>1</name>
```

```

    <config>
      <name>1</name>
      <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
        <bridge-protocol xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-oc-
ni-augments">ieee-vlan-bridge</bridge-protocol>
      </config>
      <state>
        <name>1</name>
        <type
          xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
        </state>
        <fdb>
          <config>
            <mac-learning>true</mac-learning>
          </config>
        </fdb>
        <vlans>
          <vlan>
            <vlan-id>401</vlan-id>
            <config>
              <vlan-id>401</vlan-id>
              <name>VLAN-401</name>
              <status>ACTIVE</status>
            </config>
            <state>
              <vlan-id>401</vlan-id>
              <name>VLAN-401</name>
              <status>ACTIVE</status>
            </state>
          </vlan>
          <vlan>
            <vlan-id>501</vlan-id>
            <config>
              <vlan-id>501</vlan-id>
              <name>VLAN-501</name>
              <status>ACTIVE</status>
            </config>
            <state>
              <vlan-id>501</vlan-id>
              <name>VLAN-501</name>
              <status>ACTIVE</status>
            </state>
          </vlan>
        </vlans>
      </network-instance>
    </network-instances>

```

Restrictions

The network-instance used for bridge must have a name being a number between 1 and 32.

LLDP OpenConfig Translation

Enable Management Attributes

This XML configuration snippet is used to enable LLDP and all the management TLV attributes.

Release

This configuration was introduced in OcNOS version 5.0.

OpenConfig NETCONF Payload

Here is a sample OpenConfig NetConf Payload to enable LLDP and all the management TLV attributes.

```
<lldp xmlns="http://openconfig.net/yang/lldp">
  <config>
    <enabled>true</enabled>
  </config>
</lldp>
```

OcNOS CLI command

The below CLI command is used to enable LLDP and all the management TLV attributes.

```
lldp run
lldp tlv-select basic-mgmt port-description
lldp tlv-select basic-mgmt system-name
lldp tlv-select basic-mgmt system-capabilities
lldp tlv-select basic-mgmt system-description
lldp tlv-select basic-mgmt management-address
```

OcNOS NETCONF Payload

Here is a sample OcNOS NetConf Payload to enable LLDP and all the management TLV attributes.

```
<lldp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-lldpv2">
<global>
  <global-tlv-control>
    <global-basic-management>
      <config>
        <port-description>true</port-description>
        <management-address>true</management-address>
        <system-capabilities>true</system-capabilities>
        <system-description>true</system-description>
        <system-name>true</system-name>
      </config>
    </global-basic-management>
  </global-tlv-control>
```

```
<config>
  <enable>true</enable>
</config>
</global>
</lldp>
```

Validation with NETCONF get

Here is a NetConf validation response that provides detailed information about enabling LLDP and all the management TLV attributes.

```
<lldp xmlns="http://openconfig.net/yang/lldp">
  <config>
    <enabled>true</enabled>
  </config>
  <state>
    <enabled>true</enabled>
    <counters>
      <entries-aged-out>0</entries-aged-out>
      <frame-discard>0</frame-discard>
      <frame-out>0</frame-out>
      <frame-in>0</frame-in>
    </counters>
    <system-name>OcNOS</system-name>
  </state>
</lldp>
```

Restrictions

None

Configure chassis-id

This XML configuration snippet is used to set the locally assigned chassis name for the LLDP interface.

Release

This configuration was introduced in OcNOS version 5.0.

OpenConfig NETCONF Payload

Here is a sample OpenConfig NetConf Payload to set the locally assigned chassis name for the LLDP interface.

```
<lldp xmlns="http://openconfig.net/yang/lldp">
  <config>
    <chassis-id>host7028_AS5912-54X</chassis-id>
  </config>
</lldp>
```

OcNOS CLI command

The below CLI command is used to set the locally assigned chassis name for the LLDP interface.

```
set lldp chassis locally-assigned host7028_AS5912-54X
```

OcNOS NETCONF Payload

Here is a sample OcNOS NetConf Payload to set the locally assigned chassis name for the LLDP interface.

```
<lldp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-lldpv2">
  <global>
    <management-if>
      <config>
        <locally-assigned-chassis-id>host7028_AS5912-54X</locally-
assigned-chassis-id>
      </config>
    </management-if>
  </global>
</lldp>
```

Validation with NETCONF get

Here is a NetConf validation response that provides detailed information about setting the locally assigned chassis name for the LLDP interface.

```
<lldp xmlns="http://openconfig.net/yang/lldp">
  <config>
    <enabled>true</enabled>
    <chassis-id>host7028_AS5912-54X</chassis-id>
    <chassis-id-type>MAC_ADDRESS</chassis-id-type>
  </config>
  <state>
    <enabled>true</enabled>
    <counters>
      <entries-aged-out>0</entries-aged-out>
      <frame-discard>0</frame-discard>
      <frame-out>0</frame-out>
      <frame-in>0</frame-in>
    </counters>
    <system-name>OcNOS</system-name>
    <chassis-id>host7028_AS5912-54X</chassis-id>
    <chassis-id-type>MAC_ADDRESS</chassis-id-type>
  </state>
</lldp>
```

Restrictions

The chassis type MAC_ADDRESS is fixed and assumed by default.

Configure suppress advertisement

This XM configuration snippet is used to configure suppress TLV advertisement for one or more attributes.

Release

This configuration was introduced in OcNOS version 5.0.

OpenConfig NETCONF Payload

Here is a sample OpenConfig NetConf Payload to configure suppress TLV advertisement for one or more attributes.

```
<lldp xmlns="http://openconfig.net/yang/lldp">
  <config>
    <suppress-tlv-advertisement>SYSTEM_DESCRIPTION</suppress-tlv-advertisement>
  </config>
</lldp>
```

OcNOS CLI command

The below CLI command is used to configure suppress TLV advertisement for one or more attributes.

```
no lldp tlv-select basic-mgmt system-description
```

OcNOS NETCONF Payload

Here is a sample OcNOS NetConf Payload to configure suppress TLV advertisement for one or more attributes.

```
<lldp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-lldpv2">
  <global>
    <global-tlv-control>
      <global-basic-management>
        <config>
          <system-description>false</system-description>
        </config>
      </global-basic-management>
    </global-tlv-control>
  </global>
</lldp>
```

Validation with NETCONF get

Here is a NetConf validation response that provides detailed information about configuring suppress TLV advertisement for one or more attributes

```
<lldp xmlns="http://openconfig.net/yang/lldp">
  <config>
    <enabled>true</enabled>
    <suppress-tlv-advertisement
      xmlns:oc-lldp-types="http://openconfig.net/yang/lldp/types">oc-lldp-
types:SYSTEM_DESCRIPTION</suppress-tlv-advertisement>
    <chassis-id>host7028_AS5912-54X</chassis-id>
    <chassis-id-type>MAC_ADDRESS</chassis-id-type>
  </config>
  <state>
    <enabled>true</enabled>
    <counters>
      <entries-aged-out>0</entries-aged-out>
      <frame-discard>0</frame-discard>
      <frame-out>0</frame-out>
      <frame-in>0</frame-in>
    </counters>
    <suppress-tlv-advertisement
```

```
      xmlns:oc-lldp-types="http://openconfig.net/yang/lldp/types">oc-lldp-
types:SYSTEM_DESCRIPTION</suppress-tlv-advertisement>
      <system-name>OcNOS</system-name>
      <chassis-id>host7028_AS5912-54X</chassis-id>
      <chassis-id-type>MAC_ADDRESS</chassis-id-type>
    </state>
  </lldp>
```

Restrictions

By default, all basic tlvs are disabled and can be configured using this leaf. The default behavior is 'suppressed', so this leaf-list will only show up if at least one advertisement is enabled.

As OpenConfig and OcNOS have a reverse logic for the TLV (suppress vs enable), when the suppress is present on OpenConfig, the translation forces deletion of the attribute on the Ocnos side. This is equivalent to deleting a configuration that does not exist, in which case, an error may be returned.

Configure system name

This XML configuration snippet is used to configure the system-name (hostname).

Release

This configuration was introduced in OcNOS version 5.0.

OpenConfig NETCONF Payload

Here is a sample OpenConfig NetConf Payload to configure the system-name (hostname).

```
<lldp xmlns="http://openconfig.net/yang/lldp">
  <config>
    <system-name>host7028</system-name>
  </config>
</lldp>
```

OcNOS CLI command

This CLI command is used to configure the system-name (hostname).

```
hostname host7028
```

OcNOS NETCONF Payload

Here is a sample OcNOS NetConf Payload to configure the system-name (hostname).

```
<system-info xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-system">
  <config>
    <hostname>host7028</hostname>
  </config>
</system-info>
```

Validation with NETCONF get

Here is a NetConf validation response that provides detailed information about configuring the system name (hostname).

Filter:

```
<get xmlns="urn:ietf:params:xml:ns:NETCONF:base:1.0">
  <filter type="subtree">
    <system-info xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-system">
      <config>
        <hostname />
      </config>
    </system-info>
  </filter>
</get>
```

Result:

```
<system xmlns="http://openconfig.net/yang/system">
  <config>
    <hostname>host7028</hostname>
  </config>
</system>
```

Restrictions

The configuration is same as system hostname, so both are modified when applied.

The same restrictions as for system hostname apply:

Per RFC 952 and RFC 1123, a hostname string can contain only the special characters period (".") and hyphen ("-").

These special characters cannot be at the start or end of a hostname. The number of characters in the hostname must be between 1 and 63 characters.

Enable LLDP on an interface

This XML configuration snippet is used to enable LLDP on an interface.

Release

This configuration was introduced in OcNOS version 5.0.

OpenConfig NETCONF Payload

Here is a sample OpenConfig NetConf Payload to enable LLDP on an interface.

```
<lldp xmlns="http://openconfig.net/yang/lldp">
  <interfaces>
    <interface>
      <name>xe10</name>
      <config>
        <enabled>true</enabled>
      </config>
    </interface>
```

```
</interfaces>
</lldp>
```

OcNOS CLI command

The blow CLI command is used to enable LLDP on an interface.

```
interface xe10
  lldp-agent
  set lldp enable txrx
```

OcNOS NETCONF Payload

Here is a sample OcNOS NetConf Payload to enable LLDP on an interface.

```
<lldp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-lldpv2">
  <interfaces>
    <interface>
      <name>xe10</name>
      <agent>
        <agent-type>default</agent-type>
        <config>
          <enable-tx-rx>txrx</enable-tx-rx>
          <agent-type>default</agent-type>
        </config>
      </agent>
    </interface>
  </interfaces>
</lldp>
```

Validation with NETCONF get

Here is a NetConf validation response that provides detailed information about enabling LLDP on an interface.

```
<lldp xmlns="http://openconfig.net/yang/lldp">
  <interfaces>
    <interface>
      <name>xe10</name>
      <config>
        <name>xe10</name>
        <enabled>true</enabled>
      </config>
    </interface>
  </interfaces>
</lldp>
```

Restrictions

When enabled = true, the configuration mode is tx-rx in OcNOS. When enabled = false, the OcNOS mode is set as rx-only.

LLDP get Attributes

The following attributes are read-only (runtime) for LLDP.

Counters

This command is used to display LLDP counters.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```
<filter>
<lldp xmlns="http://openconfig.net/yang/lldp">
  <state>
    <counters/>
  </state>
</lldp>
</filter>
```

OpenConfig get result

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```
<lldp xmlns="http://openconfig.net/yang/lldp">
  <state>
    <enabled>true</enabled>
    <counters>
      <entries-aged-out>0</entries-aged-out>
      <frame-discard>0</frame-discard>
      <frame-out>0</frame-out>
      <frame-in>1</frame-in>
    </counters>
  </state>
</lldp>
```

OcNOS get result

Here is the NetConf response in IPI datamodel representation.

```
<lldp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-lldpv2">
  <global>
    <state>
      <counters>
        <remote-ageouts>0</remote-ageouts>
        <remote-drops>0</remote-drops>
        <remote-deletes>0</remote-deletes>
        <remote-inserts>1</remote-inserts>
      </counters>
    </state>
  </global>
</lldp>
```

Restrictions

Only the counters remote-ageouts, remote-drops, remote-deletes, and remote-inserts are supported.

Interface counters

This command is used to display LLDP interface counters.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```
<filter>///<lldp xmlns="http://openconfig.net/yang/lldp">
<interfaces>
<interface>
<name>ce50</name>
<state>
<counters/>
</state>
</interface>
</interfaces>
</lldp>
</filter>
```

OpenConfig get result

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```
<lldp xmlns="http://openconfig.net/yang/lldp">
<interfaces>
<interface>
<name>xel</name>
<config>
<name>xel</name>
</config>
<state>
<counters>
<frame-out>14</frame-out>
</counters>
</state>
</interface>
</interfaces>
</lldp>
```

OcNOS get result

Here is the NetConf response in IPI datamodel representation.

```
<lldp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-lldpv2">
<interfaces>
<interface>
<name>xel</name>
<agent>
<agent-type>default</agent-type>
<transmit>
<state>
<tx-fast-init>2</tx-fast-init>
<tx-credit-max>9</tx-credit-max>

```

```
        <message-fast-tx>222</message-fast-tx>
        <message-tx-hold-multiplier>88</message-tx-hold-multiplier>
        <message-tx-interval>999</message-tx-interval>
        <reinit-delay>6</reinit-delay>
        <tx-ttl>65535</tx-ttl>
        <counters>
            <frames-out>14</frames-out>
        </counters>
    </state>
</transmit>
</agent>
</interface>
</interfaces>
</lldp>
```

Restrictions

Only the counter frame-out is supported.

Neighbors

This command is used to display neighbors.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```
<filter>
<lldp xmlns="http://openconfig.net/yang/lldp">
<interfaces>
<interface>
<name>ce50</name>
<neighbors>
<neighbor>
</neighbor>
</neighbors>
</interface>
</interfaces>
</lldp>
</filter>
```

OpenConfig get result

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```
<lldp xmlns="http://openconfig.net/yang/lldp">
  <interfaces>
    <interface>
      <name>xel</name>
      <config>
        <name>xel</name>
      </config>
      <neighbors>
        <neighbor>
```

```

        <id>b86a.97be.193e</id>
        <state><id>b86a.97be.193e</id><system-description>Hardware
Model:EC AS5912-54X</system-description>1<ttl>121</ttl><port-id-
type>MAC-ADDRESS</port-id-type><port-description>xel</port-description><port-
id>b86a.97be.193e</port-id><chassis-id-type>NETWORK-ADDRESS</chassis-id-
type><chassis-id>10.12.89.136</chassis-id><system-name>7031</system-
name><management-address>b86a.97a7.253c</management-address><management-
address-type>MAC-Address</management-address-type></state>
    <capabilities xmlns:oc-lldp-types="http://openconfig.net/yang/
lldp/types">
        <capability>
            <name>oc-lldp-types:MAC_BRIDGE</name>
            <state>
                <name>oc-lldp-types:MAC_BRIDGE</name>
                <enabled>true</enabled>
            </state>
        </capability>
        <capability>
            <name>oc-lldp-types:ROUTER</name>
            <state>
                <name>oc-lldp-types:ROUTER</name>
                <enabled>true</enabled>
            </state>
        </capability>
    </capabilities>
    <custom-tlvs>
        <tlv>
            <type>127</type>
            <oui>00-12-0F</oui>
            <oui-subtype>4</oui-subtype>
            <state>
                <type>127</type>
                <oui>00-12-0F</oui>
                <oui-subtype>4</oui-subtype>
                <value>1518</value>
            </state>
        </tlv>
        <tlv>
            <type>127</type>
            <oui>00-12-0F</oui>
            <oui-subtype>1</oui-subtype>
            <state>
                <type>127</type>
                <oui>00-12-0F</oui>
                <oui-subtype>1</oui-subtype>
                <value>11654</value>
            </state>
        </tlv>
        <tlv>
            <type>127</type>
            <oui>00-80-C2</oui>
            <oui-subtype>2</oui-subtype>
            <state>
                <type>127</type>
                <oui>00-80-C2</oui>
                <oui-subtype>2</oui-subtype>
                <value>0</value>
            </state>
        </tlv>
    </custom-tlvs>

```



```

    </tlv>
    <tlv>
      <type>127</type>
      <oui>00-80-C2</oui>
      <oui-subtype>1</oui-subtype>
      <state>
        <type>127</type>
        <oui>00-80-C2</oui>
        <oui-subtype>1</oui-subtype>
        <value>0</value>
      </state>
    </tlv>
  </custom-tlvs>
</neighbor>
</neighbors>
</interface>
</interfaces>
</lldp>

```

OcNOS get result

Here is the NetConf response in IPI datamodel representation.

```

<lldp xmlns="http://openconfig.net/yang/lldp">
  <interfaces>
    <interface>
      <name>xel</name>
      <config>
        <name>xel</name>
      </config>
      <neighbors>
        <neighbor>
          <id>b86a.97be.193e</id>
          <state><id>b86a.97be.193e</id><system-description>Hardware
Model:EC_AS5912-54X</system-description><ttl>121</ttl><port-id-
type>MAC_ADDRESS</port-id-type><port-description>xel</port-description><port-
id>b86a.97be.193e</port-id><chassis-id-type>NETWORK_ADDRESS</chassis-id-
type><chassis-id>10.12.89.136</chassis-id><system-name>7031</system-
name><management-address>b86a.97a7.253c</management-address><management-
address-type>MAC_Address</management-address-type></state>
          <capabilities xmlns:oc-lldp-types="http://openconfig.net/yang/
lldp/types">
            <capability>
              <name>oc-lldp-types:MAC_BRIDGE</name>
              <state>
                <name>oc-lldp-types:MAC_BRIDGE</name>
                <enabled>true</enabled>
              </state>
            </capability>
            <capability>
              <name>oc-lldp-types:ROUTER</name>
              <state>
                <name>oc-lldp-types:ROUTER</name>
                <enabled>true</enabled>
              </state>
            </capability>
          </capabilities>
        </neighbor>
      </neighbors>
    </interface>
  </interfaces>
</lldp>

```

```

    <tlv>
      <type>127</type>
      <oui>00-12-0F</oui>
      <oui-subtype>4</oui-subtype>
      <state>
        <type>127</type>
        <oui>00-12-0F</oui>
        <oui-subtype>4</oui-subtype>
        <value>1518</value>
      </state>
    </tlv>
    <tlv>
      <type>127</type>
      <oui>00-12-0F</oui>
      <oui-subtype>1</oui-subtype>
      <state>
        <type>127</type>
        <oui>00-12-0F</oui>
        <oui-subtype>1</oui-subtype>
        <value>11654</value>
      </state>
    </tlv>
    <tlv>
      <type>127</type>
      <oui>00-80-C2</oui>
      <oui-subtype>2</oui-subtype>
      <state>
        <type>127</type>
        <oui>00-80-C2</oui>
        <oui-subtype>2</oui-subtype>
        <value>0</value>
      </state>
    </tlv>
    <tlv>
      <type>127</type>
      <oui>00-80-C2</oui>
      <oui-subtype>1</oui-subtype>
      <state>
        <type>127</type>
        <oui>00-80-C2</oui>
        <oui-subtype>1</oui-subtype>
        <value>0</value>
      </state>
    </tlv>
  </custom-tlvs>
</neighbor>
</neighbors>
</interface>
</interfaces>
</lldp>

```

Neighbors name and description

This command is used to display neighbors' name and description.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```
<filter>
<lldp xmlns="http://openconfig.net/yang/lldp">
<interfaces>
<interface>
<neighbors>
<neighbor>
<name>ce50</name>
<state>
<system-name/>
<description/>
</id>
<ttl/>
</state>
</neighbor>
</neighbors>
</interface>
</interfaces>
</lldp>
</filter>
```

OpenConfig get result

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```
<lldp xmlns="http://openconfig.net/yang/lldp">
<interfaces>
<interface>
<name>eth0</name>
<config>
<name>eth0</name>
</config>
<neighbors>
<neighbor>
<id>08f1.ea53.dbf2</id>
<state>
<id>08f1.ea53.dbf2</id>
<system-description>HPE OfficeConnect Switch 1920S 24G 2SFP
JL381A PD.01.05 Linux 3.6.5-ac96795c U-Boot 2012.10-00118-g3773021 (Oct 11
2016 - 15:39:54)</system-description>
<system-name>LAB1-SW13</system-name>
</state>
</neighbor>
</neighbors>
</interface>
<interface>
<name>xe2</name>
<config>
<name>xe2</name>
</config>
<neighbors>
<neighbor>
<id>b86a.97be.193f</id>
<state>
```

```

        <id>b86a.97be.193f</id>
        <system-description>Hardware Model:EC_AS5912-54X</system-
description>
        <system-name>7031</system-name>
        </state>
        </neighbor>
        </neighbors>
    </interface>
    <interface>
        <name>xel</name>
        <config>
            <name>xel</name>
        </config>
        <neighbors>
            <neighbor>
                <id>b86a.97be.193e</id>
                <state>
                    <id>b86a.97be.193e</id>
                    <system-description>Hardware Model:EC_AS5912-54X</system-
description>
                    <system-name>7031</system-name>
                    </state>
                </neighbor>
            </neighbors>
        </interface>
    </interfaces>
</lldp>

```

OcNOS get result

Here is the NetConf response in IPI datamodel representation.

```

<lldp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-lldpv2">
  <interfaces>
    <interface>
      <name>xel</name>
      <neighbors>
        <agent>
          <agent-type>default</agent-type>
        <neighbor>
          <mac-address>b86a.97be.193e</mac-address>
          <state>
            <mac-address>b86a.97be.193e</mac-address>
            <system-capabilities-enabled>Bridge Router</system-capabilities-enabled>
            <system-capabilities>Bridge Router</system-capabilities>
            <system-description>Hardware Model:EC_AS5912-54X</system-description>
            <max-frame-size>1518</max-frame-size>
            <link-aggregate-capability>Capable</link-aggregate-capability>
            <operational-mau-type>54</operational-mau-type>
            <auto-negotiation-capability>16</auto-negotiation-capability>
            <auto-negotiation-support>1</auto-negotiation-support>
            <management-vlan>0</management-vlan>
            <vid-usage-digest>0</vid-usage-digest>
          </state>
        </neighbor>
      </neighbors>
    </interface>
  </interfaces>
</lldp>

```

```

    <pp-vlanid>0</pp-vlanid>
    <port-vlan-id>0</port-vlan-id>
    <ttl>121</ttl>
    <port-sub-type>3</port-sub-type>
    <port-description>xel</port-description>
    <port-id>b86a.97be.193e</port-id>
    <chassis-id-type>5</chassis-id-type>
    <chassis-component>10.12.89.136</chassis-component>
    <system-name>7031</system-name>
    <management-list>
      <address>b86a.97a7.253c</address>
      <oid>0</oid>
      <interface-number>10001</interface-number>
      <interface-number-sub-type>ifindex</interface-number-sub-type>
      <address-sub-type>MAC Address</address-sub-type>
    </management-list>
  </state>
</neighbor>
</agent>
</neighbors>
</interface>
</interfaces>
</lldp>

```

Neighbors chassis-id, type and ttl

This command is used to display neighbors' chassis-id, type and ttl.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```

<filter>
  <lldp xmlns="http://openconfig.net/yang/lldp">
    <interfaces>
      <interface>
        <neighbors>
          <neighbor>
            <name>ce50</name>
            <state>
              <chassis-id/>
              <chassis-id-type/>
            </id/>
            <ttl/>
          </state>
        </neighbor>
      </neighbors>
    </interface>
  </interfaces>
</lldp>
</filter>

```

OpenConfig get result

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```
<lldp xmlns="http://openconfig.net/yang/lldp">
  <interfaces>
    <interface>
      <name>eth0</name>
      <config>
        <name>eth0</name>
      </config>
      <neighbors>
        <neighbor>
          <id>08f1.ea53.dbf2</id>
          <state>
            <id>08f1.ea53.dbf2</id>
            <chassis-id>08f1.ea53.dbf0</chassis-id>
            <chassis-id-type>MAC_ADDRESS</chassis-id-type>
            <ttl>120</ttl>
          </state>
        </neighbor>
      </neighbors>
    </interface>
    <interface>
      <name>xe2</name>
      <config>
        <name>xe2</name>
      </config>
      <neighbors>
        <neighbor>
          <id>b86a.97be.193f</id>
          <state>
            <id>b86a.97be.193f</id>
            <chassis-id>b86a.97a7.253c</chassis-id>
            <chassis-id-type>MAC_ADDRESS</chassis-id-type>
            <ttl>121</ttl>
          </state>
        </neighbor>
      </neighbors>
    </interface>
    <interface>
      <name>xe1</name>
      <config>
        <name>xe1</name>
      </config>
      <neighbors>
        <neighbor>
          <id>b86a.97be.193e</id>
          <state>
            <id>b86a.97be.193e</id>
            <chassis-id>10.12.89.136</chassis-id>
            <chassis-id-type>NETWORK_ADDRESS</chassis-id-type>
            <ttl>121</ttl>
          </state>
        </neighbor>
      </neighbors>
    </interface>
  </interfaces>
</lldp>
```

```

    </interfaces>
  </lldp>

```

OcNOS get result

Here is the NetConf response in IPI datamodel representation.

```

<lldp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-lldpv2">
  <interfaces>
    <interface>
      <name>xel</name>
      <neighbors>
        <agent>
          <agent-type>default</agent-type>
          <neighbor>
            <mac-address>b86a.97be.193e</mac-address>
            <state>
              <mac-address>b86a.97be.193e</mac-address>
              <system-capabilities-enabled>Bridge Router</system-
capabilities-enabled>
              <system-capabilities>Bridge Router</system-capabilities>
              <system-description>Hardware Model:EC_AS5912-54X</system-
description>
              <max-frame-size>1518</max-frame-size>
              <link-aggregate-capability>Capable</link-aggregate-
capability>
              <operational-mau-type>54</operational-mau-type>
              <auto-negotiation-capability>16</auto-negotiation-
capability>
              <auto-negotiation-support>1</auto-negotiation-support>
              <management-vlan>0</management-vlan>
              <vid-usage-digest>0</vid-usage-digest>
              <pp-vlanid>0</pp-vlanid>
              <port-vlan-id>0</port-vlan-id>
              <ttl>121</ttl>
              <port-sub-type>3</port-sub-type>
              <port-description>xel</port-description>
              <port-id>b86a.97be.193e</port-id>
              <chassis-id-type>5</chassis-id-type>
              <chassis-component>10.12.89.136</chassis-component>
              <system-name>7031</system-name>
              <management-list>
                <address>b86a.97a7.253c</address>
                <oid>0</oid>
                <interface-number>10001</interface-number>
                <interface-number-sub-type>ifindex</interface-number-sub-
type>
                <address-sub-type>MAC Address</address-sub-type>
              </management-list>
            </state>
          </neighbor>
        </agent>
      </neighbors>
    </interface>
  </interfaces>
</lldp>

```

Neighbors port-id, type and description

This is used to display neighbors' port-id, port-id-type and port-description.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```
<filter>
<lldp xmlns="http://openconfig.net/yang/lldp">
<interfaces>
<interface>
<neighbors>
<neighbor>
<name>ce50</name>
<state>
<port-id/>
<port-id-type/>
<port-description/>
<management-address/>
<management-address-type/>
</state>
</neighbor>
</neighbors>
</interface>
</interfaces>
</lldp>
</filter>
```

OpenConfig get result

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```
<lldp xmlns="http://openconfig.net/yang/lldp">
<interfaces>
<interface>
<name>eth0</name>
<config>
<name>eth0</name>
</config>
<neighbors>
<neighbor>
<id>08f1.ea53.dbf2</id>
<state>
<id>08f1.ea53.dbf2</id>
<port-id>08f1.ea53.dbf2</port-id>
<port-id-type>MAC_ADDRESS</port-id-type>
<port-description>19</port-description>
</state>
</neighbor>
</neighbors>
</interface>
<interface>
<name>xe2</name>
```



```

<config>
  <name>xe2</name>
</config>
<neighbors>
  <neighbor>
    <id>b86a.97be.193f</id>
    <state>
      <id>b86a.97be.193f</id>
      <port-id>b86a.97be.193f</port-id>
      <port-id-type>MAC_ADDRESS</port-id-type>
      <port-description>xe2</port-description>
    </state>
  </neighbor>
</neighbors>
</interface>
<interface>
  <name>xe1</name>
  <config>
    <name>xe1</name>
  </config>
  <neighbors>
    <neighbor>
      <id>b86a.97be.193e</id>
      <state>
        <id>b86a.97be.193e</id>
        <port-id>b86a.97be.193e</port-id>
        <port-id-type>MAC_ADDRESS</port-id-type>
        <port-description>xe1</port-description>
      </state>
    </neighbor>
  </neighbors>
</interface>
</interfaces>
</lldp>

```

OcNOS get result

Here is the NetConf response in IPI datamodel representation.

```

<lldp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-lldpv2">
  <interfaces>
    <interface>
      <name>xe1</name>
      <neighbors>
        <agent>
          <agent-type>default</agent-type>
          <neighbor>
            <mac-address>b86a.97be.193e</mac-address>
            <state>
              <mac-address>b86a.97be.193e</mac-address>
              <system-capabilities-enabled>Bridge Router</system-
capabilities-enabled>
              <system-capabilities>Bridge Router</system-capabilities>
              <system-description>Hardware Model:EC_AS5912-54X</system-
description>
              <max-frame-size>1518</max-frame-size>

```

```

capability>      <link-aggregate-capability>Capable</link-aggregate-
                  <operational-mau-type>54</operational-mau-type>
capability>      <auto-negotiation-capability>16</auto-negotiation-
                  <auto-negotiation-support>1</auto-negotiation-support>
                  <management-vlan>0</management-vlan>
                  <vid-usage-digest>0</vid-usage-digest>
                  <pp-vlanid>0</pp-vlanid>
                  <port-vlan-id>0</port-vlan-id>
                  <ttl>121</ttl>
                  <port-sub-type>3</port-sub-type>
                  <port-description>xel</port-description>
                  <port-id>b86a.97be.193e</port-id>
                  <chassis-id-type>5</chassis-id-type>
                  <chassis-component>10.12.89.136</chassis-component>
                  <system-name>7031</system-name>
                  <management-list>
                    <address>b86a.97a7.253c</address>
                    <oid>0</oid>
                    <interface-number>10001</interface-number>
                    <interface-number-sub-type>ifindex</interface-number-sub-
type>              <address-sub-type>MAC Address</address-sub-type>
                  </management-list>
                  </state>
                </neighbor>
              </agent>
            </neighbors>
          </interface>
        </interfaces>
      </lldp>

```

Neighbors custom TLVs type/subtype

This command is used to display neighbors' custom TLVs type/subtype.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```

<filter>
<lldp xmlns="http://openconfig.net/yang/lldp">
<interfaces>
<interface>
<neighbors>
<neighbor>
<custom-tlvs>
<tlv>
<state>
<type>127</type>
<oui>00-80-C2</oui>
<config/>
</state>
</tlv>

```

```

</custom-tlvs>
</neighbor>
</neighbors>
</interface>
</interfaces>
</lldp>
</filter>

```

OpenConfig get result

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```

<lldp xmlns="http://openconfig.net/yang/lldp">
  <interfaces>
    <interface>
      <name>eth0</name>
      <config>
        <name>eth0</name>
      </config>
      <neighbors>
        <neighbor>
          <id>08f1.ea53.dbf2</id>
          <state><id>08f1.ea53.dbf2</id><system-description>HPE
OfficeConnect Switch 1920S 24G 2SFP JL381A PD.01.05 Linux 3.6.5-ac96795c U-
Boot 2012.10-00118-g3773021 (Oct 11 2016 - 15:39:54)</system-
description>0<ttl>120</ttl><port-id-type>MAC ADDRESS</port-id-type><port-
description>19</port-description><port-id>08f1.ea53.dbf2</port-id><chassis-id-
type>MAC ADDRESS</chassis-id-type><chassis-id>08f1.ea53.dbf0</chassis-
id><system-name>LAB1-SW13</system-name><management-address>10.12.89.123</
management-address><management-address-type>IP Address</management-address-
type></state>
          <capabilities xmlns:oc-lldp-types="http://openconfig.net/yang/
lldp/types">
            <capability>
              <name>oc-lldp-types:MAC_BRIDGE</name>
              <state>
                <name>oc-lldp-types:MAC_BRIDGE</name>
                <enabled>true</enabled>
              </state>
            </capability>
            <capability>
              <name>oc-lldp-types:ROUTER</name>
              <state>
                <name>oc-lldp-types:ROUTER</name>
                <enabled>false</enabled>
              </state>
            </capability>
          </capabilities>
          <custom-tlvs>
            <tlv>
              <type>127</type>
              <oui>00-12-0F</oui>
              <oui-subtype>4</oui-subtype>
              <state>
                <type>127</type>
                <oui>00-12-0F</oui>
                <oui-subtype>4</oui-subtype>
                <value>0</value>
              </state>
            </tlv>
          </custom-tlvs>
        </neighbor>
      </neighbors>
    </interface>
  </interfaces>
</lldp>

```

```

        </state>
      </tlv>
    <tlv>
      <type>127</type>
      <oui>00-12-0F</oui>
      <oui-subtype>1</oui-subtype>
      <state>
        <type>127</type>
        <oui>00-12-0F</oui>
        <oui-subtype>1</oui-subtype>
        <value>000</value>
      </state>
    </tlv>
    <tlv>
      <type>127</type>
      <oui>00-80-C2</oui>
      <oui-subtype>2</oui-subtype>
      <state>
        <type>127</type>
        <oui>00-80-C2</oui>
        <oui-subtype>2</oui-subtype>
        <value>0</value>
      </state>
    </tlv>
    <tlv>
      <type>127</type>
      <oui>00-80-C2</oui>
      <oui-subtype>1</oui-subtype>
      <state>
        <type>127</type>
        <oui>00-80-C2</oui>
        <oui-subtype>1</oui-subtype>
        <value>0</value>
      </state>
    </tlv>
  </custom-tlvs>
</neighbor>
</neighbors>
</interface>
<interface>
  <name>xe2</name>
  <config>
    <name>xe2</name>
  </config>
  <neighbors>
    <neighbor>
      <id>b86a.97be.193f</id>
      <state><id>b86a.97be.193f</id><system-description>Hardware
Model:EC AS5912-54X</system-description><1<ttl>121</ttl><port-id-
type>MAC-ADDRESS</port-id-type><port-description>xe2</port-description><port-
id>b86a.97be.193f</port-id><chassis-id-type>MAC-ADDRESS</chassis-id-
type><chassis-id>b86a.97a7.253c</chassis-id><system-name>7031</system-
name><management-address>b86a.97a7.253c</management-address><management-
address-type>MAC-Address</management-address-type></state>
      <capabilities xmlns:oc-lldp-types="http://openconfig.net/yang/
lldp/types">
        <capability>
          <name>oc-lldp-types:MAC_BRIDGE</name>

```

```
<state>
  <name>oc-lldp-types:MAC_BRIDGE</name>
  <enabled>true</enabled>
</state>
</capability>
<capability>
  <name>oc-lldp-types:ROUTER</name>
  <state>
    <name>oc-lldp-types:ROUTER</name>
    <enabled>true</enabled>
  </state>
</capability>
</capabilities>
<custom-tlvs>
  <tlv>
    <type>127</type>
    <oui>00-12-0F</oui>
    <oui-subtype>4</oui-subtype>
    <state>
      <type>127</type>
      <oui>00-12-0F</oui>
      <oui-subtype>4</oui-subtype>
      <value>1518</value>
    </state>
  </tlv>
  <tlv>
    <type>127</type>
    <oui>00-12-0F</oui>
    <oui-subtype>1</oui-subtype>
    <state>
      <type>127</type>
      <oui>00-12-0F</oui>
      <oui-subtype>1</oui-subtype>
      <value>11654</value>
    </state>
  </tlv>
  <tlv>
    <type>127</type>
    <oui>00-80-C2</oui>
    <oui-subtype>2</oui-subtype>
    <state>
      <type>127</type>
      <oui>00-80-C2</oui>
      <oui-subtype>2</oui-subtype>
      <value>0</value>
    </state>
  </tlv>
  <tlv>
    <type>127</type>
    <oui>00-80-C2</oui>
    <oui-subtype>1</oui-subtype>
    <state>
      <type>127</type>
      <oui>00-80-C2</oui>
      <oui-subtype>1</oui-subtype>
      <value>0</value>
    </state>
  </tlv>
```

```

        </tlv>
      </custom-tlvs>
    </neighbor>
  </neighbors>
</interface>
<interface>
  <name>xel</name>
  <config>
    <name>xel</name>
  </config>
  <neighbors>
    <neighbor>
      <id>b86a.97be.193e</id>
      <state><id>b86a.97be.193e</id><system-description>Hardware
Model:EC AS5912-54X</system-description>1<ttl>121</ttl><port-id-
type>MAC-ADDRESS</port-id-type><port-description>xel</port-description><port-
id>b86a.97be.193e</port-id><chassis-id-type>NETWORK-ADDRESS</chassis-id-
type><chassis-id>10.12.89.136</chassis-id><system-name>7031</system-
name><management-address>b86a.97a7.253c</management-address><management-
address-type>MAC-Address</management-address-type></state>
      <capabilities xmlns:oc-lldp-types="http://openconfig.net/yang/
lldp/types">
        <capability>
          <name>oc-lldp-types:MAC_BRIDGE</name>
          <state>
            <name>oc-lldp-types:MAC_BRIDGE</name>
            <enabled>true</enabled>
          </state>
        </capability>
        <capability>
          <name>oc-lldp-types:ROUTER</name>
          <state>
            <name>oc-lldp-types:ROUTER</name>
            <enabled>true</enabled>
          </state>
        </capability>
      </capabilities>
    <custom-tlvs>
      <tlv>
        <type>127</type>
        <oui>00-12-0F</oui>
        <oui-subtype>4</oui-subtype>
        <state>
          <type>127</type>
          <oui>00-12-0F</oui>
          <oui-subtype>4</oui-subtype>
          <value>1518</value>
        </state>
      </tlv>
      <tlv>
        <type>127</type>
        <oui>00-12-0F</oui>
        <oui-subtype>1</oui-subtype>
        <state>
          <type>127</type>
          <oui>00-12-0F</oui>
          <oui-subtype>1</oui-subtype>
          <value>11654</value>
        </state>
      </tlv>
    </custom-tlvs>
  </neighbor>
</neighbors>
</interface>

```

```

        </state>
      </tlv>
    <tlv>
      <type>127</type>
      <oui>00-80-C2</oui>
      <oui-subtype>2</oui-subtype>
      <state>
        <type>127</type>
        <oui>00-80-C2</oui>
        <oui-subtype>2</oui-subtype>
        <value>0</value>
      </state>
    </tlv>
  <tlv>
    <type>127</type>
    <oui>00-80-C2</oui>
    <oui-subtype>1</oui-subtype>
    <state>
      <type>127</type>
      <oui>00-80-C2</oui>
      <oui-subtype>1</oui-subtype>
      <value>0</value>
    </state>
  </tlv>
</custom-tlvs>
</neighbor>
</neighbors>
</interface>
</interfaces>
</lldp>

```

OcNOS get result

Here is the NetConf response in IPI datamodel representation.

```

<lldp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-lldpv2">
  <interfaces>
    <interface>
      <name>xel</name>
      <neighbors>
        <agent>
          <agent-type>default</agent-type>
          <neighbor>
            <mac-address>b86a.97be.193e</mac-address>
            <state>
              <mac-address>b86a.97be.193e</mac-address>
              <pp-vlanid>0</pp-vlanid>
            </state>
          </neighbor>
        </agent>
      </neighbors>
    </interface>
  </interfaces>
</lldp>

```

Neighbors custom TLVs

This command is used to display neighbors' custom TLVs.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```
<filter>
<lldp xmlns="http://openconfig.net/yang/lldp">
  <interfaces>
    <interface>
      <name>ce50</name>
      <neighbors>
        <neighbor>
          <custom-tlvs>
            <tlv>
              <type>127</type>
              <oui>0-80-C2</oui>
            </tlv>
          </custom-tlvs>
        </neighbor>
      </neighbors>
    </interface>
  </interfaces>
</lldp>
</filter>
```

OpenConfig get result

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```
<lldp xmlns="http://openconfig.net/yang/lldp">
  <interfaces>
    <interface>
      <name>xel</name>
      <config>
        <name>xel</name>
      </config>
      <neighbors>
        <neighbor>
          <id>b86a.97be.193e</id>
          <state><id>b86a.97be.193e</id><system-description>Hardware
Model:EC AS5912-54X</system-description>1<ttl>121</ttl><port-id-
type>MAC_ADDRESS</port-id-type><port-description>xel</port-description><port-
id>b86a.97be.193e</port-id><chassis-id-type>NETWORK_ADDRESS</chassis-id-
type><chassis-id>10.12.89.136</chassis-id><system-name>7031</system-
name><management-address>b86a.97a7.253c</management-address><management-
address-type>MAC Address</management-address-type></state>
          <capabilities xmlns:oc-lldp-types="http://openconfig.net/yang/
lldp/types">
            <capability>
              <name>oc-lldp-types:MAC_BRIDGE</name>
              <state>
                <name>oc-lldp-types:MAC_BRIDGE</name>
                <enabled>true</enabled>
              </state>
            </capability>
          </capabilities>
        </neighbor>
      </neighbors>
    </interface>
  </interfaces>
</lldp>
```



```
        </state>
    </capability>
    <capability>
        <name>oc-lldp-types:ROUTER</name>
        <state>
            <name>oc-lldp-types:ROUTER</name>
            <enabled>true</enabled>
        </state>
    </capability>
</capabilities>
<custom-tlvs>
    <tlv>
        <type>127</type>
        <oui>00-12-0F</oui>
        <oui-subtype>4</oui-subtype>
        <state>
            <type>127</type>
            <oui>00-12-0F</oui>
            <oui-subtype>4</oui-subtype>
            <value>1518</value>
        </state>
    </tlv>
    <tlv>
        <type>127</type>
        <oui>00-12-0F</oui>
        <oui-subtype>1</oui-subtype>
        <state>
            <type>127</type>
            <oui>00-12-0F</oui>
            <oui-subtype>1</oui-subtype>
            <value>11654</value>
        </state>
    </tlv>
    <tlv>
        <type>127</type>
        <oui>00-80-C2</oui>
        <oui-subtype>2</oui-subtype>
        <state>
            <type>127</type>
            <oui>00-80-C2</oui>
            <oui-subtype>2</oui-subtype>
            <value>0</value>
        </state>
    </tlv>
    <tlv>
        <type>127</type>
        <oui>00-80-C2</oui>
        <oui-subtype>1</oui-subtype>
        <state>
            <type>127</type>
            <oui>00-80-C2</oui>
            <oui-subtype>1</oui-subtype>
            <value>0</value>
        </state>
    </tlv>
</custom-tlvs>
</neighbor>
```

```
    </neighbors>
  </interface>
</interfaces>
</lldp>
```

OcNOS get result

Here is the NetConf response in IPI datamodel representation.

```
<lldp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-lldpv2">
  <interfaces>
    <interface>
      <name>xel</name>
      <neighbors>
        <agent>
          <agent-type>default</agent-type>
          <neighbor>
            <mac-address>b86a.97be.193e</mac-address>
            <state>
              <mac-address>b86a.97be.193e</mac-address>
              <port-vlan-id>0</port-vlan-id>
            </state>
          </neighbor>
        </agent>
      </neighbors>
    </interface>
  </interfaces>
</lldp>
```

Neighbors capabilities

This command is used to display neighbors' capabilities.

OpenConfig Filter

Here is the OpenConfig filter for the get operation that results in the Get OpenConfig Return output shown below.

```
<filter>
<lldp xmlns="http://openconfig.net/yang/lldp">
  <interfaces>
    <interface>
      <name>ce50</name>
      <neighbors>
        <neighbor>
          <capabilities>
            <capability>
              <name/>
            </capability>
          </capabilities>
        </neighbor>
      </neighbors>
    </interface>
```

```

</interfaces>
</lldp>
</filter>

```

OpenConfig get result

Here is a NetConf validation response that provides detailed information on the configuration and runtime.

```

<lldp xmlns="http://openconfig.net/yang/lldp">
  <interfaces>
    <interface>
      <name>xel</name>
      <config>
        <name>xel</name>
      </config>
      <neighbors>
        <neighbor>
          <id>b86a.97be.193e</id>
          <state><id>b86a.97be.193e</id><system-description>Hardware
Model:EC AS5912-54X</system-description><ttl>121</ttl><port-id-
type>MAC_ADDRESS</port-id-type><port-description>xel</port-description><port-
id>b86a.97be.193e</port-id><chassis-id-type>NETWORK_ADDRESS</chassis-id-
type><chassis-id>10.12.89.136</chassis-id><system-name>7031</system-
name><management-address>b86a.97be.193e</management-address><management-
address-type>MAC Address</management-address-type></state>
          <capabilities xmlns:oc-lldp-types="http://openconfig.net/yang/
lldp/types">
            <capability>
              <name>oc-lldp-types:MAC_BRIDGE</name>
              <state>
                <name>oc-lldp-types:MAC_BRIDGE</name>
                <enabled>true</enabled>
              </state>
            </capability>
            <capability>
              <name>oc-lldp-types:ROUTER</name>
              <state>
                <name>oc-lldp-types:ROUTER</name>
                <enabled>true</enabled>
              </state>
            </capability>
          </capabilities>
          <custom-tlvs>
            <tlv>
              <type>127</type>
              <oui>00-12-0F</oui>
              <oui-subtype>4</oui-subtype>
              <state>
                <type>127</type>
                <oui>00-12-0F</oui>
                <oui-subtype>4</oui-subtype>
                <value>1522</value>
              </state>
            </tlv>
            <tlv>
              <type>127</type>
              <oui>00-12-0F</oui>
              <oui-subtype>1</oui-subtype>

```

```
<state>
  <type>127</type>
  <oui>00-12-0F</oui>
  <oui-subtype>1</oui-subtype>
  <value>11654</value>
</state>
</tlv>
<tlv>
  <type>127</type>
  <oui>00-80-C2</oui>
  <oui-subtype>4</oui-subtype>
  <state>
    <type>127</type>
    <oui>00-80-C2</oui>
    <oui-subtype>4</oui-subtype>
    <value>Rapid-Spanning-Tree-Protocol</value>
  </state>
</tlv>
<tlv>
  <type>127</type>
  <oui>00-80-C2</oui>
  <oui-subtype>2</oui-subtype>
  <state>
    <type>127</type>
    <oui>00-80-C2</oui>
    <oui-subtype>2</oui-subtype>
    <value>0</value>
  </state>
</tlv>
<tlv>
  <type>127</type>
  <oui>00-80-C2</oui>
  <oui-subtype>1</oui-subtype>
  <state>
    <type>127</type>
    <oui>00-80-C2</oui>
    <oui-subtype>1</oui-subtype>
    <value>1</value>
  </state>
</tlv>
<tlv>
  <type>127</type>
  <oui>00-80-C2</oui>
  <oui-subtype>3</oui-subtype>
  <state>
    <type>127</type>
    <oui>00-80-C2</oui>
    <oui-subtype>3</oui-subtype>
    <value>1default</value>
  </state>
</tlv>
</custom-tlvs>
</neighbor>
</neighbors>
</interface>
</interfaces>
</lldp>
```

OcNOS get result

Here is the NetConf response in IPI datamodel representation.

```
<lldp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-lldpv2">
  <interfaces>
    <interface>
      <name>xel</name>
      <neighbors>
        <agent>
          <agent-type>default</agent-type>
          <neighbor>
            <mac-address>b86a.97be.193e</mac-address>
            <state>
              <mac-address>b86a.97be.193e</mac-address>
              <port-vlan-id>0</port-vlan-id>
            </state>
          </neighbor>
        </agent>
      </neighbors>
    </interface>
  </interfaces>
</lldp>
```

ACL OpenConfig Translation

Enable Management Attributes

This XML configuration snippet is used to create an Access Control List (ACL) entry to operate over L2 data traffic.

Release

This configuration was introduced in OcNOS version 6.5.0.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to enable management attributes.

```
<acl xmlns="http://openconfig.net/yang/acl">
  <acl-sets>
    <acl-set>
      <name>ACL_OC_L2</name>
      <type
        xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACL_L2</type>
      <config>
        <name>ACL_OC_L2</name>
        <type
          xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACL_L2</type>
        <description>ACL L2 CFG Test</description>
      </config>
      <acl-entries>
        <acl-entry>
          <sequence-id>1</sequence-id>
          <config>
            <sequence-id>1</sequence-id>
          </config>
          <l2>
            <config>
              <destination-mac>00BB.CCDD.EEFF</destination-mac>
              <destination-mac-mask>AC00.0000.0000</destination-mac-mask>
              <ethertype>ETHERTYPE_IPV4</ethertype>
              <source-mac>0000.CCDD.EEFF</source-mac>
              <source-mac-mask>AABB.0000.0000</source-mac-mask>
            </config>
          </l2>
          <actions>
            <config>
              <forwarding-action
                xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACCEPT</
forwarding-action>
              <log-action>LOG_SYSLOG</log-action>
            </config>
          </actions>
        </acl-entry>
      </acl-entries>
    </acl-set>
  </acl-sets>
</acl>
```

```

    </acl-entries>
  </acl-set>
</acl-sets>
</acl>

```

OcNOS CLI Command

This CLI command is used to enable management attributes.

```

mac access-list ACL_OC_L2
  remark ACL L2 CFG Test
  1 permit 0000.CCDD.EEFF AABB.0000.0000 00BB.CCDD.EEFF AC00.0000.0000 ipv4 log
!

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to enable management attributes.

```

<acl xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-acl">
  <acl-sets>
    <acl-set>
      <name>ACL_OC_L2</name>
      <type>mac</type>
      <config>
        <name>ACL_OC_L2</name>
        <type>mac</type>
        <description>ACL L2 CFG Test</description>
      </config>
    <acl-entries>
      <acl-entry>
        <sequence-id>1</sequence-id>
        <config>
          <sequence-id>1</sequence-id>
          </config>
          <mac>
            <config>
              <destination-mac-address>0000.0000.0000</destination-mac-
address>
              <destination-mac-mask>AA32.CCDD.EE10</destination-mac-mask>
              <ethertype>ipv4</ethertype>
              <source-mac-address>0000.0000.00EE</source-mac-address>
              <source-mac-mask>AABB.CCDD.EE11</source-mac-mask>
              <forwarding-action>permit</forwarding-action>
              <monitor-action>log</monitor-action>
            </config>
          </mac>
        </acl-entry>
      </acl-entries>
    </acl-set>
  </acl-sets>
</acl>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about enabling management attributes.

```

    <acl xmlns="http://openconfig.net/yang/acl">
      <acl-sets>
        <acl-set>
          <name>ACL_OC_L2</name>
          <type
            xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACL_L2</type>
          <config>
            <name>ACL_OC_L2</name>
            <type
              xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACL_L2</
type>
            <description>ACL L2 CFG Test</description>
          </config>
          <acl-entries>
            <acl-entry>
              <sequence-id>1</sequence-id>
              <config>
                <sequence-id>1</sequence-id>
              </config>
              <mac>
                <config>
                  <source-mac>0000.CCDD.EEFF</source-mac>
                  <source-mac-mask>AABB.0000.0000</source-mac-mask>
                  <ethertype>ETHERTYPE_IPV4</ethertype>
                  <destination-mac>00BB.CCDD.EEFF</destination-mac>
                  <destination-mac-mask>AC00.0000.0000</destination-mac-mask>
                </config>
              </mac>
              <actions>
                <config>
                  <forwarding-action
                    xmlns:oc-acl="http://openconfig.net/yang/acl">oc-
acl:ACCEPT</forwarding-action>
                  <log-action
                    xmlns:oc-acl="http://openconfig.net/yang/acl">oc-
acl:LOG_SYSLOG</log-action>
                </config>
              </actions>
            </acl-entry>
          </acl-entries>
        </acl-set>
      </acl-sets>
    </acl>

```

Restrictions

The leaf /oc-acl:acl/acl-sets/acl-set/acl-entries/acl-entry/actions/config/log-action is only valid on DC platform. Other leaves are valid on all the platforms.

Create IPv4 Entries

This XML configuration snippet is used to create an ACL entry to operate over IPv4 data traffic.

Release

This configuration was introduced in OcNOS version 6.5.0.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create IPv4 entries.

```

    <acl xmlns="http://openconfig.net/yang/acl">
      <acl-sets>
        <acl-set>
          <name>ACL_OC_IPV4</name>
          <type
type>      xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACL_IPV4</
          <config>
            <name>ACL_OC_IPV4</name>
            <type
type>      xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACL_IPV4</
              <description>ACL TFW Test</description>
            </config>
            <acl-entries>
              <acl-entry>
                <sequence-id>10</sequence-id>
                <config>
                  <sequence-id>10</sequence-id>
                </config>
                <ipv4>
                  <config>
                    <source-address>1.1.1.0/24</source-address>
                    <destination-address>2.2.2.0/24</destination-address>
                    <dscp>18</dscp>
                    <protocol>6</protocol>
                  </config>
                </ipv4>
                <actions>
                  <config>
                    <forwarding-action
acl:ACCEPT</forwarding-action>
                    <log-action>LOG_SYSLOG</log-action>
                  </config>
                </actions>
                <transport>
                  <config>
                    <explicit-tcp-flags
packet-match-types">oc-pkt-match-types:TCP_SYN</explicit-tcp-flags>
                    <source-port>22</source-port>
                    <destination-port>80</destination-port>
                  </config>
                </transport>
              </acl-entry>
            </acl-entries>
          </acl-set>

```

```

    </acl-sets>
  </acl>

```

OcNOS CLI Command

This CLI command is used to create IPv4 entries.

```

ip access-list ACL_OC_IPV4
  remark ACL TFW Test
  10 permit tcp 1.1.1.0/24 2.2.2.0/24 dscp af21 syn log
!
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to create IPv4 entries.

```

<acl xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-acl">
  <acl-sets>
    <acl-set>
      <name>ACL_OC_IPV4</name>
      <type>ip</type>
      <config>
        <name>ACL_OC_IPV4</name>
        <type>ip</type>
        <description>ACL TFW Test</description>
      </config>
      <acl-entries>
        <acl-entry>
          <sequence-id>10</sequence-id>
          <config>
            <sequence-id>10</sequence-id>
          </config>
          <ipv4>
            <config>
              <source-address>1.1.1.0/24</source-address>
              <destination-address>2.2.2.0/24</destination-address>
              <dscp>18</dscp>
              <protocol-tcp />
              <tcp-source-port>22</tcp-source-port>
              <tcp-destination-port>80</tcp-destination-port>
              <tcp-flags>syn</tcp-flags>
              <forwarding-action>permit</forwarding-action>
              <monitor-action>log</monitor-action>
            </config>
          </ipv4>
        </acl-entry>
      </acl-entries>
    </acl-set>
  </acl-sets>
</acl>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about creating IPv4 entries.

```

    <acl xmlns="http://openconfig.net/yang/acl">
      <acl-sets>
        <acl-set>
          <name>ACL_OC_IPV4</name>
          <type
type>
            xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACL_IPV4</
            <config>
              <name>ACL_OC_IPV4</name>
              <type
type>
                xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACL_IPV4</
                <description>ACL TFW Test</description>
              </config>
              <acl-entries>
                <acl-entry>
                  <sequence-id>10</sequence-id>
                  <config>
                    <sequence-id>10</sequence-id>
                  </config>
                  <ipv4>
                    <config>
                      <source-address>1.1.1.0/24</source-address>
                      <destination-address>2.2.2.0/24</destination-address>
                      <dscp>18</dscp>
                      <protocol>6</protocol>
                    </config>
                  </ipv4>
                  <actions>
                    <config>
                      <forwarding-action
acl:ACCEPT</forwarding-action>
                      <log-action
acl:LOG_SYSLOG</log-action>
                      </config>
                    </actions>
                    <transport>
                      <config>
                        <explicit-tcp-flags
packet-match-types">oc-pkt-match-types:TCP_SYN</explicit-tcp-flags>
                      </config>
                    </transport>
                  </acl-entry>
                </acl-entries>
              </acl-set>
            </acl-sets>
          </acl>

```

Restrictions

- The leaf `/oc-acl:acl/acl-sets/acl-set/acl-entries/acl-entry/actions/config/log-action` is only valid on DC platform.
- The Open Config leaf `/oc-acl:acl/acl-sets/acl-set/acl-entries/acl-entry[sequence-id]/transport/config/tcp-flags` was named in version 2.0.0. It is now renamed as **explicit-tcp-flags**. The new

XPath is /oc-acl:acl/acl-sets/acl-set/acl-entries/acl-entry/transport/config/explicit-tcp-flags.

- OpenConfig leaves /acl/acl-sets/acl-set/acl-entries/acl-entry/transport/config/explicit-tcp-flags and /acl/acl-sets/acl-set/acl-entries/acl-entry/transport/state/explicit-tcp-flags have the following mapping:

OpenConfig XPath /oc-acl:acl/acl-sets/acl-set/acl-entries/acl-entry/transport/config/explicit-tcp-flags	OcNOS XPath /acl/acl-sets/acl-set/acl-entries/acl-entry/ipv4/config/tcp-flags
TCP_ACK	ack
TCP_FIN	fin
TCP_PSH	psh
TCP_RST	rst
TCP_SYN	syn
TCP_URG	urg
TCP_IPI_ESTABLISHED Note: This value has been add by OcNOS through deviation file ipi-oc-acl-deviations.yang)	established

Create IPv6 Entries

This XML configuration snippet is used to create an Access Control List (ACL) entry to operate over IPv6 data traffic.

Release

This configuration was introduced in OcNOS version 6.5.0.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create IPv6 entries.

```

<acl xmlns="http://openconfig.net/yang/acl">
  <acl-sets>
    <acl-set>
      <name>ACL_OC_IPV6</name>
      <type
type>
        xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACL_IPV6</
type>
      <config>
        <name>ACL_OC_IPV6</name>
        <type
type>
          xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACL_IPV6</
          <description>ACL TFW Test</description>
        </config>
      <acl-entries>
        <acl-entry>
          <sequence-id>11</sequence-id>
          <config>

```

```

        <sequence-id>11</sequence-id>
    </config>
    <ipv6>
        <config>
            <source-address>2000::/8</source-address>
            <destination-address>2001::/16</destination-address>
            <dscp>23</dscp>
            <protocol>6</protocol>
        </config>
    </ipv6>
    <actions>
        <config>
            <forwarding-action
                xmlns:oc-acl="http://openconfig.net/yang/acl">oc-
acl:REJECT</forwarding-action>
            <log-action>LOG_SYSLOG</log-action>
        </config>
    </actions>
</acl-entry>
</acl-entries>
</acl-set>
</acl-sets>
</acl>

```

OcNOS CLI Command

This CLI command is used to create IPv6 entries.

```

ipv6 access-list ACL_OC_IPV6
  remark ACL TFW Test
  11 deny tcp 2000::/8 2001::/16 dscp 23
!

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to create IPv6 entries.

```

<acl xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-acl">
  <acl-sets>
    <acl-set>
      <name>ACL_OC_IPV6</name>
      <type>ipv6</type>
      <config>
        <name>ACL_OC_IPV6</name>
        <type>ipv6</type>
        <description>ACL TFW Test</description>
      </config>
    <acl-entries>
      <acl-entry>
        <sequence-id>11</sequence-id>
        <config>
          <sequence-id>11</sequence-id>
        </config>
      <ipv6>
        <config>
          <source-address>2000::/8</source-address>

```

```

        <destination-address>2001::/16</destination-address>
        <dscp>23</dscp>
        <protocol-tcp />
        <forwarding-action>deny</forwarding-action>
        <monitor-action>log</monitor-action>
    </config>
</ipv6>
</acl-entry>
</acl-entries>
</acl-set>
</acl-sets>
</acl>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about creating IPv6 entries.

```

    <acl xmlns="http://openconfig.net/yang/acl">
<acl-sets>
  <acl-set>
    <name>ACL_OC_IPV6</name>
    <type
type>      xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACL_IPV6</
    <config>
      <name>ACL_OC_IPV6</name>
      <type
type>      xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACL_IPV6</
      <description>ACL TFW Test</description>
    </config>
    <acl-entries>
      <acl-entry>
        <sequence-id>11</sequence-id>
        <config>
          <sequence-id>11</sequence-id>
        </config>
        <ipv6>
          <config>
            <source-address>2000::/8</source-address>
            <destination-address>2001::/16</destination-address>
            <dscp>23</dscp>
            <protocol>6</protocol>
          </config>
        </ipv6>
        <actions>
          <config>
            <forwarding-action
acl:REJECT</forwarding-action>
              <log-action
acl:LOG_SYSLOG</log-action>
                xmlns:oc-acl="http://openconfig.net/yang/acl">oc-
            </config>
          </actions>
        </acl-entry>
      </acl-entries>
    </acl>

```

```
    </acl-set>
  </acl-sets>
</acl>
```

Restrictions

- The leaf `/oc-acl:acl/acl-sets/acl-set/acl-entries/acl-entry/actions/config/log-action` is only valid on DC platform.
- The old Open Config leaf `/oc-acl:acl/acl-sets/acl-set/acl-entries/acl-entry/transport/config/tcp-flags` was renamed on Open Config v2.0.0, now it is named **explicit-tcp-flags**. The new xpath is `/oc-acl:acl/acl-sets/acl-set/acl-entries/acl-entry/transport/config/explicit-tcp-flags`.
- OpenConfig leaves `/acl/acl-sets/acl-set/acl-entries/acl-entry/transport/config/explicit-tcp-flags` and `/acl/acl-sets/acl-set/acl-entries/acl-entry/transport/state/explicit-tcp-flags` have the following mapping:

OpenConfig XPath <code>/oc-acl:acl/acl-sets/acl-set/acl-entries/acl-entry/transport/config/explicit-tcp-flags</code>	OcNOS XPath <code>/acl/acl-sets/acl-set/acl-entries/acl-entry/ipv6/config/tcp-flags</code>
TCP_ACK	ack
TCP_FIN	fin
TCP_PSH	psh
TCP_RST	rst
TCP_SYN	syn
TCP_URG	urg
TCP_IPI_ESTABLISHED Note: This value has been added by OcNOS through deviation file <code>ipi-oc-acl-deviations.yang</code>	established

Create Interfaces Egress for IPv4/IPv6

This XML configuration snippet is used to associate an Access Control List (ACL) entry type IPv4/IPv6 to an interface on egress direction.

The interface can associate only one ACL entry at a time.

Release

This configuration was introduced in OcNOS version 6.5.0.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create interfaces egress for IPv4/IPv6.

```
<acl xmlns="http://openconfig.net/yang/acl">
  <interfaces>
    <interface>
```

```

    <id>eth1</id>
  </config>
</config>
<egress-acl-sets>
  <egress-acl-set>
    <type
acl:ACL_IPV4</type>
      xmlns:oc-acl="http://openconfig.net/yang/acl">oc-
    <set-name>ACL_OC_IPV4</set-name>
    <config>
      <set-name>ACL_OC_IPV4</set-name>
      <type
acl:ACL_IPV4</type>
        xmlns:oc-acl="http://openconfig.net/yang/acl">oc-
      </config>
    </egress-acl-set>
  </egress-acl-sets>
  <interface-ref>
    <config>
      <interface>eth1</interface>
    </config>
  </interface-ref>
</interface>
</interfaces>
</acl>

```

OcNOS CLI Command

This CLI command is used to create interfaces egress for IPv4/IPv6.

```

ip access-list ACL_OC_IPV4
 remark ACL TFW Test
 10 permit tcp 1.1.1.0/24 2.2.2.0/24 dscp af21 syn
!
interface eth1
 ip access-group ACL_OC_IPV4 out

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to create interfaces egress for IPv4/IPv6.

```

  <acl xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-acl">
<interfaces>
  <interface>
    <name>eth1</name>
    <config>
      <name>eth1</name>
    </config>
    <egress-acl-sets>
      <egress-acl-set>
        <acl-type>ip</acl-type>
        <access-groups>
          <access-group>
            <acl-name>ACL_OC_IPV4</acl-name>
            <config>
              <acl-name>ACL_OC_IPV4</acl-name>

```



```

        </config>
      </access-group>
    </access-groups>
  <config>
    <acl-type>ip</acl-type>
  </config>
</egress-acl-set>
</egress-acl-sets>
</interface>
</interfaces>
</acl>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about creating interfaces egress for IPv4/IPv6.

```

  <acl xmlns="http://openconfig.net/yang/acl">
    <interfaces>
      <interface>
        <id>eth1</id>
        <config>
          <id>eth1</id>
        </config>
        <egress-acl-sets>
          <egress-acl-set>
            <type
acl:ACL_IPV4</type>
              <set-name>ACL_OC_IPV4</set-name>
              <config>
                <set-name>ACL_OC_IPV4</set-name>
                <type
acl:ACL_IPV4</type>
                  <xmlns:oc-acl="http://openconfig.net/yang/acl">oc-
                    </config>
                  </egress-acl-set>
                </egress-acl-sets>
              <interface-ref>
                <config>
                  <interface>eth1</interface>
                </config>
              </interface-ref>
            </interface>
          </interfaces>
        </acl>

```

Restrictions

- Only one ACL entry can be associated on the interface in egress direction.
- The leaf `/acl/interfaces/interface/id` must have the format “<interface>.<subinterface>”. For example, `xe10.2`, and must be limited to 32 characters.

Create Interfaces Ingress for IPv4/IPv6

This XML configuration snippet is used to associate an Access Control List entry type IPv4/IPv6 to an interface on ingress direction.

The interface can associate only one ACL entry at a time.

Release

This configuration was introduced in OcNOS version 6.5.0.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create interfaces ingress for IPv4/IPv6.

```
<acl xmlns="http://openconfig.net/yang/acl">
  <interfaces>
    <interface>
      <id>eth1</id>
      <config>
        <id>eth1</id>
      </config>
      <ingress-acl-sets>
        <ingress-acl-set>
          <type
acl:ACL_IPV4</type>
            xmlns:oc-acl="http://openconfig.net/yang/acl">oc-
              <set-name>ACL_OC_IPV4</set-name>
              <config>
                <set-name>ACL_OC_IPV4</set-name>
                <type
acl:ACL_IPV4</type>
                  xmlns:oc-acl="http://openconfig.net/yang/acl">oc-
                    </config>
                  </ingress-acl-set>
                </ingress-acl-sets>
              <interface-ref>
                <config>
                  <interface>eth1</interface>
                </config>
              </interface-ref>
            </interface>
          </interfaces>
        </acl>
```

OcNOS CLI Command

This CLI command is used to create interfaces ingress for IPv4/IPv6.

```
ip access-list ACL_OC_IPV4
  remark ACL TFW Test
  10 permit tcp 1.1.1.0/24 2.2.2.0/24 dscp af21 syn
!
interface eth1
```

```
ip access-group ACL_OC_IPV4 in
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to create interfaces ingress for IPv4/IPv6.

```
<acl xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-acl">
  <interfaces>
    <interface>
      <name>eth1</name>
      <config>
        <name>eth1</name>
      </config>
      <ingress-acl-sets>
        <ingress-acl-set>
          <acl-type>ip</acl-type>
          <access-groups>
            <access-group>
              <acl-name>ACL_OC_IPV4</acl-name>
              <config>
                <acl-name>ACL_OC_IPV4</acl-name>
              </config>
            </access-group>
          </access-groups>
          <config>
            <acl-type>ip</acl-type>
          </config>
        </ingress-acl-set>
      </ingress-acl-sets>
    </interface>
  </interfaces>
</acl>
```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about creating interfaces ingress for IPv4/IPv6.

```
<acl xmlns="http://openconfig.net/yang/acl">
  <interfaces>
    <interface>
      <id>eth1</id>
      <config>
        <id>eth1</id>
      </config>
      <ingress-acl-sets>
        <ingress-acl-set>
          <type
            xmlns:oc-acl="http://openconfig.net/yang/acl">oc-
acl:ACL_IPV4</type>
          <set-name>ACL_OC_IPV4</set-name>
          <config>
            <set-name>ACL_OC_IPV4</set-name>
            <type
              xmlns:oc-acl="http://openconfig.net/yang/acl">oc-
acl:ACL_IPV4</type>
          </config>
```

```

    </ingress-acl-set>
  </ingress-acl-sets>
  <interface-ref>
    <config>
      <interface>eth1</interface>
    </config>
  </interface-ref>
</interface>
</interfaces>
</acl>

```

Restrictions

- Only one ACL entry can be associated on the interface in ingress direction.
- The leaf `/acl/interfaces/interface/id` must have the format “<interface>.<subinterface>”. For example, xe10.2, and must be limited to 32 characters.

Create Interfaces Egress for L2

This XML configuration snippet is used to associate an Access Control List (ACL) entry type L2 to an interface on egress direction.

The interface can associate only one ACL entry at a time.

Release

This configuration was introduced in OcNOS version 6.5.0.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create interfaces egress for L2.

```

    <acl xmlns="http://openconfig.net/yang/acl">
  <interfaces>
    <interface>
      <id>eth3</id>
      <config>
        <id>eth3</id>
      </config>
      <egress-acl-sets>
        <egress-acl-set>
          <type
type>
            xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACL_L2</
            <set-name>ACL_OC_L2</set-name>
          <config>
            <set-name>ACL_OC_L2</set-name>
            <type
acl:ACL_L2</type>
              xmlns:oc-acl="http://openconfig.net/yang/acl">oc-
            </config>
          </egress-acl-set>
        </egress-acl-sets>

```

```
<interface-ref>
  <config>
    <interface>eth3</interface>
  </config>
</interface-ref>
</interface>
</interfaces>
</acl>
```

OcNOS CLI Command

This CLI command is used to create interfaces egress for L2.

```
mac access-list ACL_OC_L2
  remark ACL L2 CFG Test
  1 permit 0000.CCDD.EEFF AABB.0000.0000 00BB.CCDD.EEFF AC00.0000.0000 ipv4
!
interface eth3
  mac access-group ACL_OC_L2 out
!
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to create interfaces egress for L2.

```
<acl xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-acl">
  <interfaces>
    <interface>
      <name>eth3</name>
      <config>
        <name>eth3</name>
      </config>
      <egress-acl-sets>
        <egress-acl-set>
          <acl-type>mac</acl-type>
          <access-groups>
            <access-group>
              <acl-name>ACL_OC_L2</acl-name>
              <config>
                <acl-name>ACL_OC_L2</acl-name>
              </config>
            </access-group>
          </access-groups>
          <config>
            <acl-type>mac</acl-type>
          </config>
        </egress-acl-set>
      </egress-acl-sets>
    </interface>
  </interfaces>
</acl>
```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about creating interfaces egress for L2.

```

    <acl xmlns="http://openconfig.net/yang/acl">
    <interfaces>
    <interface>
    <id>eth3</id>
    <config>
    <id>eth3</id>
    </config>
    <egress-acl-sets>
    <egress-acl-set>
    <type
type>
    xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACL_L2</
    <set-name>ACL_OC_L2</set-name>
    <config>
    <set-name>ACL_OC_L2</set-name>
    <type
acl:ACL_L2</type>
    xmlns:oc-acl="http://openconfig.net/yang/acl">oc-
    </config>
    </egress-acl-set>
    </egress-acl-sets>
    <interface-ref>
    <config>
    <interface>eth3</interface>
    </config>
    </interface-ref>
    </interface>
    </interfaces>
    </acl>

```

Restrictions

- Only one ACL entry can be associated on the interface in egress direction.
- The leaf `/acl/interfaces/interface/id` must have the format “<interface>.<subinterface>”. For example, xe10.2, and must be limited to 32 characters.

Create Interfaces Ingress for L2

This XML configuration snippet is used to associate an Access Control List (ACL) entry type L2 to an interface on ingress direction.

The interface can associate only one ACL entry at a time.

Release

This configuration was introduced in OcNOS version 6.5.0.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create interfaces ingress for L2.

```

    <acl xmlns="http://openconfig.net/yang/acl">
    <interfaces>

```

```

    <interface>
      <id>eth3</id>
      <config>
        <id>eth3</id>
      </config>
      <ingress-acl-sets>
        <ingress-acl-set>
          <type>
            type>
              xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACL_L2</
              <set-name>ACL_OC_L2</set-name>
              <config>
                <set-name>ACL_OC_L2</set-name>
                <type>
                  acl:ACL_L2</type>
                  xmlns:oc-acl="http://openconfig.net/yang/acl">oc-
                  </config>
                </ingress-acl-set>
              </ingress-acl-sets>
              <interface-ref>
                <config>
                  <interface>eth3</interface>
                </config>
              </interface-ref>
            </interface>
          </interfaces>
        </acl>

```

OcNOS CLI Command

This CLI command is used to create interfaces ingress for L2.

```

mac access-list ACL_OC_L2
  remark ACL L2 CFG Test
  1 permit 0000.CCDD.EEFF AABB.0000.0000 00BB.CCDD.EEFF AC00.0000.0000 ipv4
!
interface eth3
  mac access-group ACL_OC_L2 in
!

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to create interfaces ingress for L2.

```

  <acl xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-acl">
    <interfaces>
      <interface>
        <name>eth3</name>
        <config>
          <name>eth3</name>
        </config>
        <ingress-acl-sets>
          <ingress-acl-set>
            <acl-type>mac</acl-type>
            <access-groups>
              <access-group>
                <acl-name>ACL_OC_L2</acl-name>

```

```

        <config>
          <acl-name>ACL_OC_L2</acl-name>
        </config>
      </access-group>
    </access-groups>
    <config>
      <acl-type>mac</acl-type>
    </config>
  </ingress-acl-set>
</ingress-acl-sets>
</interface>
</interfaces>
</acl>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about creating interfaces ingress for L2.

```

    <acl xmlns="http://openconfig.net/yang/acl">
      <interfaces>
        <interface>
          <id>eth3</id>
          <config>
            <id>eth3</id>
          </config>
          <ingress-acl-sets>
            <ingress-acl-set>
              <type>
                xmlns:oc-acl="http://openconfig.net/yang/acl">oc-acl:ACL_L2</
type>
                <set-name>ACL_OC_L2</set-name>
              <config>
                <set-name>ACL_OC_L2</set-name>
                <type>
                  xmlns:oc-acl="http://openconfig.net/yang/acl">oc-
acl:ACL_L2</type>
                </config>
              </ingress-acl-set>
            </ingress-acl-sets>
            <interface-ref>
              <config>
                <interface>eth3</interface>
              </config>
            </interface-ref>
          </interface>
        </interfaces>
      </acl>

```

Restrictions

- Only one ACL entry can be associated on the interface in ingress direction.
- The leaf `/acl/interfaces/interface/id` must have the format “<interface>.<subinterface>”. For example, `xe10.2`, and must be limited to 32 characters.

QoS OpenConfig Translation

Enable QoS on OcNOS

The below configuration is used to enable QoS on OcNOS.

Release

This configuration was introduced in OcNOS version 6.5.0.

Configuration

The QoS protocol is enabled by default in OcNOS version 6.5.0. However, the QoS protocol needs to be enabled in the older versions before configuring QoS features.

Note that there is no equivalent configuration to enable/disable QoS protocol in OpenConfig model.

OpenConfig NetConf Payload

There is no equivalent configuration in OpenConfig model.

OcNOS CLI command

The below CLI command is used to enable QoS on OcNOS.

```
OcNOS#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
OcNOS(config)#qos enable
OcNOS(config)#commit
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to enable QoS on OcNOS.

```
<qos xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-qos">
  <global>
    <config>
      <enable-qos>enable</enable-qos>
    </config>
  </global>
</qos>
```

Validation with NetConf get

There is no equivalent configuration.

Restrictions

- In OcNOS version 6.5.0, the QoS protocol is already enabled by default.
- In OcNOS versions earlier than 6.5.0, the QoS protocol needs to be enabled before configuring QoS features.

Enable QoS Profile on OcNOS

Release

This configuration was introduced in OcNOS version 6.5.0.

Configuration

The QoS feature on OcNOS model needs the Hw profile to be enabled on DC Hardware types. Note that there is no equivalent configuration on OpenConfig model.

OpenConfig NetConf Payload

There is no equivalent configuration.

OcNOS CLI command

The below CLI command is used to enable QoS Profile on OcNOS.

```
hardware-profile filter ingress-ipv4-qos enable
```

OcNOS NetConf Payload

Here is the OcNOS NetConf Payload to enable QoS Profile on OcNOS.

```
<profiles xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <hardware-profile xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
    <filters xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
      <config xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
        <ingress-ipv4-qos/>
      </config>
    </filters>
  </hardware-profile>
</profiles>
```

Validation with NetConf get

There is no equivalent configuration.

Restrictions

None.

Create Classifiers Profiles

Release

This configuration was introduced in OcNOS version 6.5.0.

Configuration

The OpenConfig QoS Classifiers is a profile responsible for handling data traffic classification. This configuration does not have a direct equivalent object on OcNOS model. To configure classifier on OcNOS model, it needs to be translated to Access Control List (ACL), class-maps and policy-maps objects.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create Classifiers profiles.

```
<qos xmlns="http://openconfig.net/yang/qos">
  <queues>
    <queue>
      <name>q0</name>
      <config>
        <name>q0</name>
        <queue-id>0</queue-id>
      </config>
    </queue>
    <queue>
      <name>q1</name>
      <config>
        <name>q1</name>
        <queue-id>1</queue-id>
      </config>
    </queue>
  </queues>
  <queue-management-profiles>
    <queue-management-profile>
      <name>q0</name>
      <config>
        <name>q0</name>
      </config>
      <wred>
        <uniform>
          <config>
            <min-threshold>128000</min-threshold>
            <max-threshold>256000</max-threshold>
          </config>
        </uniform>
      </wred>
    </queue-management-profile>
    <queue-management-profile>
      <name>q1</name>
      <config>
        <name>q1</name>
```

```

    </config>
    <wred>
      <uniform>
        <config>
          <min-threshold>256000</min-threshold>
          <max-threshold>512000</max-threshold>
        </config>
      </uniform>
    </wred>
  </queue-management-profile>
</queue-management-profiles>
<forwarding-groups>
  <forwarding-group>
    <name>q0</name>
    <config>
      <name>q0</name>
      <output-queue>q0</output-queue>
    </config>
  </forwarding-group>
</forwarding-groups>
<classifiers>
  <classifier>
    <name>IN_CUSTOMERIF</name>
    <config>
      <name>IN_CUSTOMERIF</name>
      <type>IPV4</type>
    </config>
    <terms>
      <term>
        <id>10</id>
        <config>
          <id>10</id>
        </config>
        <conditions>
          <ipv4>
            <config>
              <source-address>1.1.1.1/24</source-address>
              <destination-address>2.2.2.2/24</destination-
address>
              <dscp>af21</dscp>
            </config>
          </ipv4>
        </conditions>
        <actions>
          <config>
            <target-group>q0</target-group>
          </config>
        </actions>
      </term>
      <term>
        <id>20</id>
        <config>
          <id>20</id>
        </config>
        <conditions>
          <ipv4>
            <config>

```

```

        <source-address>3.3.3.3/24</source-address>
        <destination-address>4.4.4.4/24</destination-
address>
        <dscp>26</dscp>
    </config>
</ipv4>
</conditions>
<actions>
    <config>
        <target-group>q1</target-group>
    </config>
</actions>
</term>
</terms>
</classifier>
</classifiers>
</qos>

```

OcNOS CLI command

The below CLI command is used to create Classifiers profiles for handling data traffic classification.

```

qos enable
!
ip access-list IN_CUSTOMERIF$10
 1 permit tcp 1.1.1.0/24 2.2.2.0/24 dscp af21
ip access-list IN_CUSTOMERIF$20
 1 permit tcp 3.3.3.0/24 4.4.4.0/24 dscp af31
!
class-map type qos match-any IN_CUSTOMERIF$10
 match access-group IN_CUSTOMERIF$10
!
class-map type qos match-any IN_CUSTOMERIF$20
 match access-group IN_CUSTOMERIF$20
!
policy-map type qos IN_CUSTOMERIF
 class type qos IN_CUSTOMERIF$10
   set queue 0
   exit
 class type qos IN_CUSTOMERIF$20
   set queue 1
   exit
!

```

OcNOS NetConf Payload

Here is a sample OcNOS Netconf Payload to create Classifiers profiles for handling data traffic classification.

```

<acl xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-acl">
  <acl-sets>
    <acl-set>
      <name>IN_CUSTOMERIF$10</name>
      <type>ip</type>
      <config>
        <name>IN_CUSTOMERIF$10</name>
        <type>ip</type>

```

```

</config>
<acl-entries>
  <acl-entry>
    <sequence-id>1</sequence-id>
    <config>
      <sequence-id>1</sequence-id>
    </config>
    <ipv4>
      <config>
        <forwarding-action>permit</forwarding-action>
        <source-address>1.1.1.0/24</source-address>
        <destination-address>2.2.2.0/24</destination-address>
        <dscp>af21</dscp>
        <protocol-tcp/>
      </config>
    </ipv4>
  </acl-entry>
</acl-entries>
</acl-set>
<acl-set>
  <name>IN_CUSTOMERIF$20</name>
  <type>ip</type>
  <config>
    <name>IN_CUSTOMERIF$20</name>
    <type>ip</type>
  </config>
  <acl-entries>
    <acl-entry>
      <sequence-id>1</sequence-id>
      <config>
        <sequence-id>1</sequence-id>
      </config>
      <ipv4>
        <config>
          <forwarding-action>permit</forwarding-action>
          <source-address>3.3.3.0/24</source-address>
          <destination-address>4.4.4.0/24</destination-address>
          <dscp>af31</dscp>
          <protocol-tcp/>
        </config>
      </ipv4>
    </acl-entry>
  </acl-entries>
</acl-set>
</acl-sets>
</acl>
<qos xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-qos">
  <global>
    <config>
      <enable-qos>enable</enable-qos>
    </config>
    <class-maps>
      <class-map>
        <name>IN_CUSTOMERIF$10</name>
        <config>
          <name>IN_CUSTOMERIF$10</name>
          <type>qos</type>

```

```

        <match-criteria>match-any</match-criteria>
    </config>
    <match-any-conditions>
        <config>
            <access-control-list-name>IN_CUSTOMERIF$10</access-control-
list-name>
                </config>
        </match-any-conditions>
    </class-map>
</class-map>
<class-map>
    <name>IN_CUSTOMERIF$20</name>
    <config>
        <name>IN_CUSTOMERIF$20</name>
        <type>qos</type>
        <match-criteria>match-any</match-criteria>
    </config>
    <match-any-conditions>
        <config>
            <access-control-list-name>IN_CUSTOMERIF$20</access-control-
list-name>
                </config>
        </match-any-conditions>
    </class-map>
</class-maps>
<policy-maps>
    <policy-map>
        <policy-map-name>IN_CUSTOMERIF</policy-map-name>
        <config>
            <policy-map-name>IN_CUSTOMERIF</policy-map-name>
            <type>qos</type>
        </config>
    </policy-map>
</classes>
<class>
    <class-map-name>IN_CUSTOMERIF$10</class-map-name>
    <config>
        <class-map-name>IN_CUSTOMERIF$10</class-map-name>
        <type>qos</type>
    </config>
    <qos-mode>
        <config>
            <queue-id>0</queue-id>
        </config>
    </qos-mode>
</class>
<class>
    <class-map-name>IN_CUSTOMERIF$20</class-map-name>
    <config>
        <class-map-name>IN_CUSTOMERIF$20</class-map-name>
        <type>qos</type>
    </config>
    <qos-mode>
        <config>
            <queue-id>1</queue-id>
        </config>
    </qos-mode>
</class>
</classes>

```

```

    </policy-map>
  </policy-maps>
</global>
</qos>

```

Validation with NetConf get

Here is the NetConf validation response that provides detailed information about creating Classifiers profiles.

```

<qos xmlns="http://openconfig.net/yang/qos">
  <classifiers>
    <classifier>
      <name>IN_CUSTOMERIF</name>
      <config>
        <name>IN_CUSTOMERIF</name>
        <type>IPv4</type>
      </config>
      <state>
        <name>IN_CUSTOMERIF</name>
        <type>IPv4</type>
      </state>
      <terms>
        <term>
          <id>10</id>
          <config>
            <id>10</id>
          </config>
          <state>
            <id>10</id>
          </state>
          <actions>
            <config>
              <target-group>q0</target-group>
            </config>
            <state>
              <target-group>q0</target-group>
            </state>
          </actions>
          <conditions>
            <ipv4>
              <config>
                <source-address>1.1.1.0/24</source-address>
                <destination-address>2.2.2.0/24</destination-address>
                <dscp>18</dscp>
              </config>
              <state>
                <source-address>1.1.1.0/24</source-address>
                <destination-address>2.2.2.0/24</destination-address>
                <dscp>18</dscp>
              </state>
            </ipv4>
          </conditions>
        </term>
        <term>
          <id>20</id>
          <config>
            <id>20</id>

```



```

    </config>
    <state>
      <id>20</id>
    </state>
    <actions>
      <config>
        <target-group>q1</target-group>
      </config>
      <state>
        <target-group>q1</target-group>
      </state>
    </actions>
    <conditions>
      <ipv4>
        <config>
          <source-address>3.3.3.0/24</source-address>
          <destination-address>4.4.4.0/24</destination-address>
          <dscp>26</dscp>
        </config>
        <state>
          <source-address>3.3.3.0/24</source-address>
          <destination-address>4.4.4.0/24</destination-address>
          <dscp>26</dscp>
        </state>
      </ipv4>
    </conditions>
  </term>
</terms>
</classifier>
</classifiers>
<queue-management-profiles>
  <queue-management-profile>
    <name>q0</name>
    <config>
      <name>q0</name>
    </config>
    <state>
      <name>q0</name>
    </state>
    <wred>
      <uniform>
        <config>
          <min-threshold>128000</min-threshold>
          <max-threshold>256000</max-threshold>
        </config>
        <state>
          <min-threshold>128000</min-threshold>
          <max-threshold>256000</max-threshold>
        </state>
      </uniform>
    </wred>
  </queue-management-profile>
  <queue-management-profile>
    <name>q1</name>
    <config>
      <name>q1</name>
    </config>

```

```
<state>
  <name>q1</name>
</state>
<wred>
  <uniform>
    <config>
      <min-threshold>256000</min-threshold>
      <max-threshold>512000</max-threshold>
    </config>
    <state>
      <min-threshold>256000</min-threshold>
      <max-threshold>512000</max-threshold>
    </state>
  </uniform>
</wred>
</queue-management-profile>
</queue-management-profiles>
<forwarding-groups>
  <forwarding-group>
    <name>q0</name>
    <config>
      <name>q0</name>
      <output-queue>q0</output-queue>
    </config>
    <state>
      <name>q0</name>
      <output-queue>q0</output-queue>
    </state>
  </forwarding-group>
</forwarding-groups>
<queues>
  <queue>
    <name>q0</name>
    <config>
      <name>q0</name>
      <queue-id>0</queue-id>
    </config>
    <state>
      <name>q0</name>
      <queue-id>0</queue-id>
    </state>
  </queue>
  <queue>
    <name>q1</name>
    <config>
      <name>q1</name>
      <queue-id>1</queue-id>
    </config>
    <state>
      <name>q1</name>
      <queue-id>1</queue-id>
    </state>
  </queue>
</queues>
</qos>
```

Restrictions

All the paths mentioned below have restrictions:

- `/qos/interfaces/interface/output/classifiers`
This association is not supported on OcNOS model.
- `/qos/classifiers/classifier/terms/term/actions/remark`
This association is not supported on OcNOS model.
- Path `/qos/queue-management-profiles` is available on OpenConfig versions above 1.0.0.
- Path `/qos/queues` was restructured on OpenConfig versions above 1.0.0.

Create Forwarding-groups Profiles

Release

This configuration was introduced in OcNOS version 6.5.0.

Configuration

The OpenConfig profile Forwarding-group does not have an equivalent model on OcNOS model, so this object is stored inside Translation Auxiliary Database.

The object name on OpenConfig format allows any string value. However on OcNOS, all forwarding-profiles have fixed names that follow the pattern **q[0-7]**. Hence, the Forwarding-groups leaf name must follow this pattern.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create Forwarding-groups profiles.

```
<qos xmlns="http://openconfig.net/yang/qos">
  <forwarding-groups>
    <forwarding-group>
      <name>q0</name>
      <config>
        <name>q0</name>
        <output-queue>q0</output-queue>iority>
      </config>
    </forwarding-group>
  </forwarding-groups>
</qos>
```

OcNOS CLI command

There is no equivalent configuration.

OcNOS NetConf Payload

There is no equivalent configuration.

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about creating Forwarding-groups profiles.

```
<qos xmlns="http://openconfig.net/yang/qos">
  <forwarding-groups>
    <forwarding-group>
      <name>q0</name>
      <config>
        <name>q0</name>
        <output-queue>q0</output-queue>
      </config>
      <state>
        <name>q0</name>
        <output-queue>q0</output-queue>
      </state>
    </forwarding-group>
  </forwarding-groups>
</qos>
```

Restrictions

- Paths `/qos/forwarding-groups/forwarding-group/name` and `/qos/forwarding-groups/forwarding-group/config/name` have fixed names that follow the pattern **q[0-7]**.

Create Queues and Queue-Management-profiles Entries

Release

This configuration was introduced in OcNOS version 6.5.0.

Configuration

The OpenConfig profiles **Queues** and **Queue-Management-Profiles** do not have an equivalent model on OcNOS, so this object is stored inside Translation Auxiliary Database.

These OpenConfig profiles are used to configure on OcNOS model **random-detect** configuration from policy-map type queuing object.

The object name on OpenConfig format allows any string value. However on OcNOS, they have fixed names that follow the pattern **q[0-7]**. Hence the **Queues** and **Queue-Management-Profiles** leaf name must follow this pattern.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create Queues and Queue-Management-profiles entries.

```
<qos xmlns="http://openconfig.net/yang/qos">
  <queues>
    <queue>
      <name>q0</name>
      <config>
        <name>q0</name>
```

```

        <queue-id>0</queue-id>
      </config>
    </queue>
  <queue>
    <name>q1</name>
    <config>
      <name>q1</name>
      <queue-id>1</queue-id>
    </config>
  </queue>
</queues>
<queue-management-profiles>
  <queue-management-profile>
    <name>q0</name>
    <config>
      <name>q0</name>
    </config>
    <wred>
      <uniform>
        <config>
          <min-threshold>128000</min-threshold>
          <max-threshold>256000</max-threshold>
        </config>
      </uniform>
    </wred>
  </queue-management-profile>
  <queue-management-profile>
    <name>q1</name>
    <config>
      <name>q1</name>
    </config>
    <wred>
      <uniform>
        <config>
          <min-threshold>256000</min-threshold>
          <max-threshold>512000</max-threshold>
        </config>
      </uniform>
    </wred>
  </queue-management-profile>
</queue-management-profiles>
</qos>

```

OcNOS CLI command

There is no equivalent configuration.

OcNOS NetConf Payload

There is no equivalent configuration.

Validation with NetConf get

Here is the NetConf response that gives detailed information about creating Queues and Queue-Management-profiles entries.

```
<qos xmlns="http://openconfig.net/yang/qos">
  <queues>
    <queue>
      <name>q0</name>
      <config>
        <name>q0</name>
        <queue-id>0</queue-id>
      </config>
      <state>
        <name>q0</name>
        <queue-id>0</queue-id>
      </state>
    </queue>
  </queues>
  <queue-management-profiles>
    <queue-management-profile>
      <name>q0</name>
      <config>
        <name>q0</name>
      </config>
      <state>
        <name>q0</name>
      </state>
      <wred>
        <uniform>
          <config>
            <min-threshold>128000</min-threshold>
            <max-threshold>256000</max-threshold>
          </config>
          <state>
            <min-threshold>128000</min-threshold>
            <max-threshold>256000</max-threshold>
          </state>
        </uniform>
      </wred>
    </queue-management-profile>
    <queue-management-profile>
      <name>q1</name>
      <config>
        <name>q1</name>
      </config>
      <state>
        <name>q1</name>
      </state>
      <wred>
        <uniform>
          <config>
            <min-threshold>256000</min-threshold>
            <max-threshold>512000</max-threshold>
          </config>
          <state>
            <min-threshold>256000</min-threshold>
```

```

        <max-threshold>512000</max-threshold>
    </state>
</uniform>
</wred>
</queue-management-profile>
</queue-management-profiles>
</qos>

```

Restrictions

- Path `/qos/queue-management-profiles` is available on OpenConfig versions above 1.0.0.
- Path `/qos/queues` was restructured on OpenConfig versions above 1.0.0.
- The path `/qos/interfaces/interface/output/queues` have its association that is not supported on OcNOS models.
- The path `/qos/interfaces/interface/input/queues/queue[name]/config/queue-management-profile` have its association that is not supported on OcNOS models.
- The paths below have fixed leaf names that follow the pattern `q[0-7]`.
 - `/qos/queues/queue/name`
 - `/qos/queues/queue/config/name`
 - `/qos/queue-management-profiles/queue-management-profile/name`
 - `/qos/queue-management-profiles/queue-management-profile/config/name`

Create Scheduler-policies Entries

Release

This configuration was introduced in OcNOS version 6.5.0.

Configuration

On DC platforms, there are limitations to configure QoS WRED and tail-drops data together. Hence, the Scheduler-policies entries is divided into ones configured with leaf `/openconfig-qos:qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/max-queue-depth-bytes` container, and the ones that do not have this leaf.

The scheduler-policies without leaf `/openconfig-qos:qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/max-queue-depth-bytes`, configures the WRED configuration on OcNOS and sets data based on OpenConfig `queue-management-profiles` container.

The scheduler-policies with leaf `/openconfig-qos:qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/max-queue-depth-bytes`, configures the tail-drops configuration on OcNOS. It is based on data set OpenConfig leaf `/openconfig-qos:qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/max-queue-depth-bytes` to configure OcNOS leaf `/ipi-qos:qos/global/policy-maps/policy-map/classes/class/queue-mode/tail-drops/tail-drop/config/max-threshold`.

The scheduler-policies input configuration for OpenConfig XPath `/oc-qos:qos/scheduler-policies/scheduler-policy/schedulers/scheduler/inputs/input/config` now has its leaf `queue` as mandatory in operations "create", "delete", "remove" and "merge". This is because the translation mapping done on OcNOS

datamodel to XPath `/qos/global/policy-maps/policy-map/classes/class` and the queue leaf points to `class-map-name` leaf on OcNOS. If this condition is not addressed, the Translation Framework throws an error when the OpenConfig payload is applied.

Create Scheduler-policies entries without leaf max-queue-depth-bytes

Release

This configuration was introduced in OcNOS version 6.5.0.

Configuration

On DC platforms, there are limitations to configure QoS WRED and tail-drops data together. Hence, the Scheduler-policies entries is divided into ones configured with leaf `/openconfig-qos:qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/max-queue-depth-bytes` container, and the ones that do not have this leaf.

The scheduler-policies without leaf `/openconfig-qos:qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/max-queue-depth-bytes`, configures the WRED configuration on OcNOS and sets data based on OpenConfig queue-management-profiles container.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create Scheduler-policies entries without leaf max-queue-depth-bytes.

```
<qos xmlns="http://openconfig.net/yang/qos">
  <queues>
    <queue>
      <name>q0</name>
      <config>
        <name>q0</name>
        <queue-id>0</queue-id>
      </config>
    </queue>
    <queue>
      <name>q1</name>
      <config>
        <name>q1</name>
        <queue-id>1</queue-id>
      </config>
    </queue>
  </queues>
  <queue-management-profiles>
    <queue-management-profile>
      <name>q0</name>
      <config>
        <name>q0</name>
      </config>
      <wred>
        <uniform>
```



```

        <config>
            <min-threshold>128000</min-threshold>
            <max-threshold>256000</max-threshold>
        </config>
    </uniform>
</wred>
</queue-management-profile>
<queue-management-profile>
    <name>q1</name>
    <config>
        <name>q1</name>
    </config>
    <wred>
        <uniform>
            <config>
                <min-threshold>256000</min-threshold>
                <max-threshold>512000</max-threshold>
            </config>
        </uniform>
    </wred>
</queue-management-profile>
</queue-management-profiles>
<forwarding-groups>
    <forwarding-group>
        <name>q0</name>
        <config>
            <name>q0</name>
            <output-queue>q0</output-queue>
        </config>
    </forwarding-group>
</forwarding-groups>
<classifiers>
    <classifier>
        <name>IN_CUSTOMERIF</name>
        <config>
            <name>IN_CUSTOMERIF</name>
            <type>IPv4</type>
        </config>
        <terms>
            <term>
                <id>10</id>
                <config>
                    <id>10</id>
                </config>
                <conditions>
                    <ipv4>
                        <config>
                            <source-address>1.1.1.1/24</source-address>
                            <destination-address>2.2.2.2/24</destination-
address>
                                <dscp>af21</dscp>
                            </config>
                        </ipv4>
                    </conditions>
                    <actions>
                        <config>
                            <target-group>q0</target-group>

```

```

        </config>
      </actions>
    </term>
  <term>
    <id>20</id>
    <config>
      <id>20</id>
    </config>
    <conditions>
      <ipv4>
        <config>
          <source-address>3.3.3.3/24</source-address>
          <destination-address>4.4.4.4/24</destination-
address>
          <dscp>26</dscp>
        </config>
      </ipv4>
    </conditions>
    <actions>
      <config>
        <target-group>q1</target-group>
      </config>
    </actions>
  </term>
</terms>
</classifier>
</classifiers>
<scheduler-policies>
  <scheduler-policy>
    <name>SCHEDULER_POLICY_1</name>
    <config>
      <name>SCHEDULER_POLICY_1</name>
    </config>
    <schedulers>
      <scheduler>
        <sequence>10</sequence>
        <config>
          <sequence>10</sequence>
          <type>oc-qos-
types:QOS_SCHEDULER_TYPE:ONE_RATE_TWO_COLOR</type>
          <priority>STRICT</priority>
        </config>
        <inputs>
          <input>
            <id>SCHEDULER_POLICY_AF1</id>
            <config>
              <id>SCHEDULER_POLICY_AF1</id>
              <input-type>QUEUE</input-type>
              <queue>q0</queue>
              <weight>5</weight>
            </config>
          </input>
        </inputs>
      </scheduler>
    </schedulers>
  </scheduler-policy>
</scheduler-policies>

```

</qos>

OcNOS CLI command

The below CLI command is used to create Scheduler-policies entries without leaf max-queue-depth-bytes.

```

qos enable
!
ip access-list IN_CUSTOMERIF$10
 1 permit tcp 1.1.1.0/24 2.2.2.0/24 dscp af21
ip access-list IN_CUSTOMERIF$20
 1 permit tcp 3.3.3.0/24 4.4.4.0/24 dscp af31
!
class-map type qos match-any IN_CUSTOMERIF$10
 match access-group IN_CUSTOMERIF$10
!
class-map type qos match-any IN_CUSTOMERIF$20
 match access-group IN_CUSTOMERIF$20
!
policy-map type qos IN_CUSTOMERIF
 class type qos IN_CUSTOMERIF$10
   set queue 0
   exit
 class type qos IN_CUSTOMERIF$20
   set queue 1
   exit
!
policy-map type queuing default SCHEDULER_POLICY_1
 class type queuing default q0
   wrr-queue weight 5
   random-detect min-threshold 128000 max-threshold 256000 bytes drop-
   probability 80
   exit
!

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to create Scheduler-policies entries without leaf max-queue-depth-bytes.

```

<acl xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-acl">
  <acl-sets>
    <acl-set>
      <name>IN_CUSTOMERIF$10</name>
      <type>ip</type>
      <config>
        <name>IN_CUSTOMERIF$10</name>
        <type>ip</type>
      </config>
    <acl-entries>
      <acl-entry>
        <sequence-id>1</sequence-id>
        <config>
          <sequence-id>1</sequence-id>
        </config>
      <ipv4>
        <config>

```

```

        <forwarding-action>permit</forwarding-action>
        <source-address>1.1.1.0/24</source-address>
        <destination-address>2.2.2.0/24</destination-address>
        <dscp>af21</dscp>
        <protocol-tcp/>
    </config>
</ipv4>
</acl-entry>
</acl-entries>
</acl-set>
<acl-set>
    <name>IN_CUSTOMERIF$20</name>
    <type>ip</type>
    <config>
        <name>IN_CUSTOMERIF$20</name>
        <type>ip</type>
    </config>
    <acl-entries>
        <acl-entry>
            <sequence-id>1</sequence-id>
            <config>
                <sequence-id>1</sequence-id>
            </config>
            <ipv4>
                <config>
                    <forwarding-action>permit</forwarding-action>
                    <source-address>3.3.3.0/24</source-address>
                    <destination-address>4.4.4.0/24</destination-address>
                    <dscp>af31</dscp>
                    <protocol-tcp/>
                </config>
            </ipv4>
        </acl-entry>
    </acl-entries>
</acl-set>
</acl-sets>
</acl>
<qos xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-qos">
    <global>
        <config>
            <enable-qos>enable</enable-qos>
            <statistics-enabled/>
        </config>
        <class-maps>
            <class-map>
                <name>IN_CUSTOMERIF$10</name>
                <config>
                    <name>IN_CUSTOMERIF$10</name>
                    <type>qos</type>
                    <match-criteria>match-any</match-criteria>
                </config>
                <match-any-conditions>
                    <config>
                        <access-control-list-name>IN_CUSTOMERIF$10</access-control-list-
name>
                    </config>
                </match-any-conditions>

```

```

    </class-map>
    <class-map>
      <name>IN_CUSTOMERIF$20</name>
      <config>
        <name>IN_CUSTOMERIF$20</name>
        <type>qos</type>
        <match-criteria>match-any</match-criteria>
      </config>
      <match-any-conditions>
        <config>
          <access-control-list-name>IN_CUSTOMERIF$20</access-control-list-
name>
        </config>
      </match-any-conditions>
    </class-map>
  </class-maps>
  <policy-maps>
    <policy-map>
      <policy-map-name>IN_CUSTOMERIF</policy-map-name>
      <config>
        <policy-map-name>IN_CUSTOMERIF</policy-map-name>
        <type>qos</type>
      </config>
      <classes>
        <class>
          <class-map-name>IN_CUSTOMERIF$10</class-map-name>
          <config>
            <class-map-name>IN_CUSTOMERIF$10</class-map-name>
            <type>qos</type>
          </config>
          <qos-mode>
            <config>
              <queue-id>0</queue-id>
            </config>
          </qos-mode>
        </class>
        <class>
          <class-map-name>IN_CUSTOMERIF$20</class-map-name>
          <config>
            <class-map-name>IN_CUSTOMERIF$20</class-map-name>
            <type>qos</type>
          </config>
          <qos-mode>
            <config>
              <queue-id>1</queue-id>
            </config>
          </qos-mode>
        </class>
      </classes>
    </policy-map>
    <policy-map>
      <policy-map-name>SCHEDULER_POLICY_1</policy-map-name>
      <config>
        <policy-map-name>SCHEDULER_POLICY_1</policy-map-name>
        <type>queuing-default</type>
      </config>
    </policy-map>
  </policy-maps>

```

```

    <class>
      <class-map-name>q0</class-map-name>
      <config>
        <class-map-name>q0</class-map-name>
        <type>queuing-default</type>
      </config>
      <queue-mode>
        <config>
          <weighted-round-robin-queue-weight>5</weighted-round-robin-
queue-weight>
        </config>
      </queue-mode>
    </class>
  </classes>
</policy-map>
<policy-map>
  <policy-map-name>subif-default-out-policy</policy-map-name>
  <config>
    <policy-map-name>subif-default-out-policy</policy-map-name>
    <type>queuing-default</type>
  </config>
  <classes>
    <class>
      <class-map-name>q1</class-map-name>
      <config>
        <class-map-name>q1</class-map-name>
        <type>queuing-default</type>
      </config>
      <queue-mode>
        <config>
          <priority-level>0</priority-level>
        </config>
      </queue-mode>
    </class>
    <class>
      <class-map-name>q2</class-map-name>
      <config>
        <class-map-name>q2</class-map-name>
        <type>queuing-default</type>
      </config>
      <queue-mode>
        <config>
          <priority-level>0</priority-level>
        </config>
      </queue-mode>
    </class>
  </classes>

```

```
<class-map-name>q3</class-map-name>
<config>
  <class-map-name>q3</class-map-name>
  <type>queuing-default</type>
</config>
<queue-mode>
  <config>
    <priority-level>0</priority-level>
  </config>
</queue-mode>
</class>
<class>
  <class-map-name>q4</class-map-name>
  <config>
    <class-map-name>q4</class-map-name>
    <type>queuing-default</type>
  </config>
  <queue-mode>
    <config>
      <priority-level>0</priority-level>
    </config>
  </queue-mode>
</class>
<class>
  <class-map-name>q5</class-map-name>
  <config>
    <class-map-name>q5</class-map-name>
    <type>queuing-default</type>
  </config>
  <queue-mode>
    <config>
      <priority-level>0</priority-level>
    </config>
  </queue-mode>
</class>
<class>
  <class-map-name>q6</class-map-name>
  <config>
    <class-map-name>q6</class-map-name>
    <type>queuing-default</type>
  </config>
  <queue-mode>
    <config>
      <priority-level>0</priority-level>
    </config>
  </queue-mode>
</class>
<class>
  <class-map-name>q7</class-map-name>
  <config>
    <class-map-name>q7</class-map-name>
    <type>queuing-default</type>
  </config>
  <queue-mode>
    <config>
      <priority-level>0</priority-level>
    </config>
  </queue-mode>
</class>
```

```

        </queue-mode>
    </class>
</classes>
</policy-map>
</policy-maps>
</global>
</qos>

```

Validation with NetConf get

Here is the NetConf response that gives detailed information about creating Scheduler-policies entries without leaf max-queue-depth-bytes.

```

<qos xmlns="http://openconfig.net/yang/qos">
  <classifiers>
    <classifier>
      <name>IN_CUSTOMERIF</name>
      <config>
        <name>IN_CUSTOMERIF</name>
        <type>IPV4</type>
      </config>
      <state>
        <name>IN_CUSTOMERIF</name>
        <type>IPV4</type>
      </state>
      <terms>
        <term>
          <id>10</id>
          <config>
            <id>10</id>
          </config>
          <state>
            <id>10</id>
          </state>
          <actions>
            <config>
              <target-group>q0</target-group>
            </config>
            <state>
              <target-group>q0</target-group>
            </state>
          </actions>
          <conditions>
            <ipv4>
              <config>
                <source-address>1.1.1.0/24</source-address>
                <destination-address>2.2.2.0/24</destination-address>
                <dscp>18</dscp>
              </config>
              <state>
                <source-address>1.1.1.0/24</source-address>
                <destination-address>2.2.2.0/24</destination-address>
                <dscp>18</dscp>
              </state>
            </ipv4>
          </conditions>
        </term>
      </terms>
    </classifier>
  </classifiers>
</qos>

```



```

    </term>
    <term>
      <id>20</id>
      <config>
        <id>20</id>
      </config>
      <state>
        <id>20</id>
      </state>
      <actions>
        <config>
          <target-group>q1</target-group>
        </config>
        <state>
          <target-group>q1</target-group>
        </state>
      </actions>
      <conditions>
        <ipv4>
          <config>
            <source-address>3.3.3.0/24</source-address>
            <destination-address>4.4.4.0/24</destination-address>
            <dscp>26</dscp>
          </config>
          <state>
            <source-address>3.3.3.0/24</source-address>
            <destination-address>4.4.4.0/24</destination-address>
            <dscp>26</dscp>
          </state>
        </ipv4>
      </conditions>
    </term>
  </terms>
</classifier>
</classifiers>
<scheduler-policies>
  <scheduler-policy>
    <name>SCHEDULER_POLICY_1</name>
    <config>
      <name>SCHEDULER_POLICY_1</name>
    </config>
    <state>
      <name>SCHEDULER_POLICY_1</name>
    </state>
  </scheduler-policy>
</scheduler-policies>
<schedulers>
  <scheduler>
    <sequence>10</sequence>
    <config>
      <sequence>10</sequence>
      <type>
        xmlns:oc-qos-types="http://openconfig.net/yang/qos-types">oc-
qos-types:ONE_RATE_TWO_COLOR</type>
      <priority>STRICT</priority>
    </config>
    <inputs>
      <input>
        <id>SCHEDULER_POLICY_AF1</id>

```

```

        <config>
          <id>SCHEDULER_POLICY_AF1</id>
          <queue>q0</queue>
          <weight>5</weight>
          <input-type>QUEUE</input-type>
        </config>
      <state>
        <weight>5</weight>
        <id>SCHEDULER_POLICY_AF1</id>
        <queue>q0</queue>
        <input-type>QUEUE</input-type>
      </state>
    </input>
  </inputs>
  <state>
    <sequence>10</sequence>
    <type
      xmlns:oc-qos-types="http://openconfig.net/yang/qos-types">oc-
qos-types:ONE_RATE_TWO_COLOR</type>
    <priority>STRICT</priority>
  </state>
</scheduler>
</schedulers>
</scheduler-policy>
</scheduler-policies>
<queue-management-profiles>
  <queue-management-profile>
    <name>q0</name>
    <config>
      <name>q0</name>
    </config>
    <state>
      <name>q0</name>
    </state>
    <wred>
      <uniform>
        <config>
          <min-threshold>128000</min-threshold>
          <max-threshold>256000</max-threshold>
          <weight>20</weight>
          <max-threshold>90</max-threshold>
        </config>
        <state>
          <min-threshold>128000</min-threshold>
          <max-threshold>256000</max-threshold>
          <weight>20</weight>
          <max-threshold>90</max-threshold>
        </state>
      </uniform>
    </wred>
  </queue-management-profile>
  <queue-management-profile>
    <name>q1</name>
    <config>
      <name>q1</name>
    </config>
    <state>

```

```
<name>q1</name>
</state>
<wred>
  <uniform>
    <config>
      <min-threshold>256000</min-threshold>
      <max-threshold>512000</max-threshold>
      <weight>10</weight>
      <max-threshold>70</max-threshold>
    </config>
    <state>
      <min-threshold>256000</min-threshold>
      <max-threshold>512000</max-threshold>
      <weight>10</weight>
      <max-threshold>70</max-threshold>
    </state>
  </uniform>
</wred>
</queue-management-profile>
</queue-management-profiles>
<forwarding-groups>
  <forwarding-group>
    <name>q0</name>
    <config>
      <name>q0</name>
      <output-queue>q0</output-queue>
      <fabric-priority>128</fabric-priority>
    </config>
    <state>
      <name>q0</name>
      <output-queue>q0</output-queue>
      <fabric-priority>128</fabric-priority>
    </state>
  </forwarding-group>
</forwarding-groups>
<queues>
  <queue>
    <name>q0</name>
    <config>
      <name>q0</name>
      <queue-id>0</queue-id>
    </config>
    <state>
      <name>q0</name>
      <queue-id>0</queue-id>
    </state>
  </queue>
  <queue>
    <name>q1</name>
    <config>
      <name>q1</name>
      <queue-id>1</queue-id>
    </config>
    <state>
      <name>q1</name>
      <queue-id>1</queue-id>
    </state>
  </queue>
</queues>
```

```

    </queue>
  </queues>
</qos>

```

Restrictions

- Path `/qos/queue-management-profiles` is available on OpenConfig versions above 1.0.0.
- Path `/qos/queues` has been restructured on OpenConfig versions above 1.0.0.
- The only valid value for path `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/config/priority` is **STRICT**.
- The leaf name for path `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/inputs/input/config/queue` have fixed names that follow the pattern **q[0-7]**.
- The scheduler-policies input configuration for OpenConfig XPath `/oc-qos:qos/scheduler-policies/scheduler-policy/schedulers/scheduler/inputs/input/config` now has its leaf `queue` as mandatory in operations "**create**", "**delete**", "**remove**" and "**merge**". This is because the translation mapping done on OcNOS datamodel to XPath `/qos/global/policy-maps/policy-map/classes/class` and the queue leaf points to `class-map-name` leaf on OcNOS. If this condition is not addressed, the Translation Framework throws an error when the OpenConfig payload is applied.
- All the paths mentioned below have restrictions:
 - `/qos/interfaces/interface/input/scheduler-policy`
This association is not valid on OcNOS and is not supported.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/output`
This association is not valid on OcNOS and is not supported.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/bc`
This association is not valid on OcNOS and is not supported.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/cir-pct`
This association is not valid on OcNOS and is not supported..
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler`
This list has a fixed max-element as one entry.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/config/type`
This configuration has a fixed value: **ONE_RATE_TWO_COLOR**.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/inputs/input/config/input-type`
This configuration has a fixed value: **QUEUE**.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/cir-pct-remaining`
This association is not valid on OcNOS and is not supported.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/queuing-behavior`
This configuration has a fixed value: **SHAPE**.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/max-queue-depth-packets`
This association is not valid on OcNOS and is not supported.

- `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/max-queue-depth-percent`
This association is not valid on OcNOS and is not supported..
- `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/conform-action`
This association is not valid on OcNOS and is not supported.
- `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/exceed-action`
This association is not valid on OcNOS and is not supported..
- `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/two-rate-three-color`
This association is not valid on OcNOS and is not supported.

Create Scheduler-policies Entries with leaf max-queue-depth-bytes

Release

This configuration was introduced in OcNOS version 6.5.0.

Configuration

On DC platforms, there are limitations to configure QoS WRED and tail-drops data together. Hence, the Scheduler-policies entries is divided into ones configured with leaf `/openconfig-qos:qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/max-queue-depth-bytes` container, and the ones that do not have this leaf.

The scheduler-policies with leaf `/openconfig-qos:qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/max-queue-depth-bytes`, configures the tail-drops configuration on OcNOS. It is based on data set OpenConfig leaf `/openconfig-qos:qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/max-queue-depth-bytes` to configure OcNOS leaf `/ipi-qos:qos/global/policy-maps/policy-map/classes/class/queue-mode/tail-drops/tail-drop/config/max-threshold`.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create Scheduler-policies entries with leaf max-queue-depth-bytes.

```
<qos xmlns="http://openconfig.net/yang/qos">
  <queues>
    <queue>
      <name>q0</name>
      <config>
        <name>q0</name>
        <queue-id>0</queue-id>
      </config>
    </queue>
    <queue>
      <name>q1</name>
      <config>
        <name>q1</name>
        <queue-id>1</queue-id>
      </config>
    </queue>
  </queues>
</qos>
```

```

        </config>
    </queue>
</queues>
<queue-management-profiles>
    <queue-management-profile>
        <name>q0</name>
        <config>
            <name>q0</name>
        </config>
        <wred>
            <uniform>
                <config>
                    <min-threshold>128000</min-threshold>
                    <max-threshold>256000</max-threshold>
                </config>
            </uniform>
        </wred>
    </queue-management-profile>
    <queue-management-profile>
        <name>q1</name>
        <config>
            <name>q1</name>
        </config>
        <wred>
            <uniform>
                <config>
                    <min-threshold>256000</min-threshold>
                    <max-threshold>512000</max-threshold>
                </config>
            </uniform>
        </wred>
    </queue-management-profile>
</queue-management-profiles>
<forwarding-groups>
    <forwarding-group>
        <name>q0</name>
        <config>
            <name>q0</name>
            <output-queue>q0</output-queue>
        </config>
    </forwarding-group>
</forwarding-groups>
<classifiers>
    <classifier>
        <name>IN_CUSTOMERIF</name>
        <config>
            <name>IN_CUSTOMERIF</name>
            <type>IPv4</type>
        </config>
        <terms>
            <term>
                <id>10</id>
                <config>
                    <id>10</id>
                </config>
            <conditions>
                <ipv4>

```

```

        <config>
          <source-address>1.1.1.1/24</source-address>
          <destination-address>2.2.2.2/24</destination-
address>
          <dscp>af21</dscp>
        </config>
      </ipv4>
    </conditions>
    <actions>
      <config>
        <target-group>q0</target-group>
      </config>
    </actions>
  </term>
  <term>
    <id>20</id>
    <config>
      <id>20</id>
    </config>
    <conditions>
      <ipv4>
        <config>
          <source-address>3.3.3.3/24</source-address>
          <destination-address>4.4.4.4/24</destination-
address>
          <dscp>26</dscp>
        </config>
      </ipv4>
    </conditions>
    <actions>
      <config>
        <target-group>q1</target-group>
      </config>
    </actions>
  </term>
</terms>
</classifier>
</classifiers>
<scheduler-policies>
  <scheduler-policy>
    <name>SCHEDULER_POLICY_2</name>
    <config>
      <name>SCHEDULER_POLICY_2</name>
    </config>
    <schedulers>
      <scheduler>
        <sequence>20</sequence>
        <config>
          <sequence>20</sequence>
          <type
types">oc-qos-types="http://openconfig.net/yang/qos-
types">oc-qos-types:ONE_RATE_TWO_COLOR</type>
          <priority>STRICT</priority>
        </config>
        <inputs>
          <input>
            <id>SCHEDULER_POLICY_AF1</id>

```

```

        <config>
          <id>SCHEDULER_POLICY_AF1</id>
          <queue>q0</queue>
          <weight>5</weight>
          <input-type>QUEUE</input-type>
        </config>
      </input>
    <input>
      <id>SCHEDULER_POLICY_AF2</id>
      <config>
        <id>SCHEDULER_POLICY_AF2</id>
        <queue>q1</queue>
        <weight>14</weight>
        <input-type>QUEUE</input-type>
      </config>
    </input>
  </inputs>
  <one-rate-two-color>
    <config>
      <max-queue-depth-bytes>64000</max-queue-depth-bytes>
      <cir>256000000</cir>
      <queuing-behavior>SHAPE</queuing-behavior>
    </config>
  </one-rate-two-color>
</scheduler>
</schedulers>
</scheduler-policy>
</scheduler-policies>
</qos>

```

OcNOS CLI command

The below CLI command is used to create Scheduler-policies entries with leaf max-queue-depth-bytes.

```

qos enable
!
ip access-list IN_CUSTOMERIF$10
 1 permit tcp 1.1.1.0/24 2.2.2.0/24 dscp af21
ip access-list IN_CUSTOMERIF$20
 1 permit tcp 3.3.3.0/24 4.4.4.0/24 dscp af31
!
class-map type qos match-any IN_CUSTOMERIF$10
 match access-group IN_CUSTOMERIF$10
!
class-map type qos match-any IN_CUSTOMERIF$20
 match access-group IN_CUSTOMERIF$20
!
policy-map type qos IN_CUSTOMERIF
 class type qos IN_CUSTOMERIF$10
   set queue 0
   exit
 class type qos IN_CUSTOMERIF$20
   set queue 1
   exit
!
policy-map type queuing default SCHEDULER_POLICY_2
 class type queuing default q0

```



```

    shape 256000000 kbps
    wrr-queue weight 5
    queue-limit 64000 bytes
    exit
class type queuing default q1
    shape 256000000 kbps
    wrr-queue weight 14
    queue-limit 64000 bytes
    exit
!
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to create Scheduler-policies entries with leaf max-queue-depth-bytes.

```

<acl xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-acl">
  <acl-sets>
    <acl-set>
      <name>IN_CUSTOMERIF$10</name>
      <type>ip</type>
      <config>
        <name>IN_CUSTOMERIF$10</name>
        <type>ip</type>
      </config>
      <acl-entries>
        <acl-entry>
          <sequence-id>1</sequence-id>
          <config>
            <sequence-id>1</sequence-id>
          </config>
          <ipv4>
            <config>
              <forwarding-action>permit</forwarding-action>
              <source-address>1.1.1.0/24</source-address>
              <destination-address>2.2.2.0/24</destination-address>
              <dscp>af21</dscp>
              <protocol-tcp/>
            </config>
          </ipv4>
        </acl-entry>
      </acl-entries>
    </acl-set>
    <acl-set>
      <name>IN_CUSTOMERIF$20</name>
      <type>ip</type>
      <config>
        <name>IN_CUSTOMERIF$20</name>
        <type>ip</type>
      </config>
      <acl-entries>
        <acl-entry>
          <sequence-id>1</sequence-id>
          <config>
            <sequence-id>1</sequence-id>
          </config>
          <ipv4>
            <config>
```

```

        <forwarding-action>permit</forwarding-action>
        <source-address>3.3.3.0/24</source-address>
        <destination-address>4.4.4.0/24</destination-address>
        <dscp>af31</dscp>
        <protocol-tcp/>
    </config>
</ipv4>
</acl-entry>
</acl-entries>
</acl-set>
</acl-sets>
</acl>
<qos xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-qos">
  <global>
    <config>
      <enable-qos>enable</enable-qos>
      <statistics-enabled/>
    </config>
    <class-maps>
      <class-map>
        <name>IN_CUSTOMERIF$10</name>
        <config>
          <name>IN_CUSTOMERIF$10</name>
          <type>qos</type>
          <match-criteria>match-any</match-criteria>
        </config>
        <match-any-conditions>
          <config>
            <access-control-list-name>IN_CUSTOMERIF$10</access-control-list-
name>
          </config>
        </match-any-conditions>
      </class-map>
      <class-map>
        <name>IN_CUSTOMERIF$20</name>
        <config>
          <name>IN_CUSTOMERIF$20</name>
          <type>qos</type>
          <match-criteria>match-any</match-criteria>
        </config>
        <match-any-conditions>
          <config>
            <access-control-list-name>IN_CUSTOMERIF$20</access-control-list-
name>
          </config>
        </match-any-conditions>
      </class-map>
    </class-maps>
    <policy-maps>
      <policy-map>
        <policy-map-name>IN_CUSTOMERIF</policy-map-name>
        <config>
          <policy-map-name>IN_CUSTOMERIF</policy-map-name>
          <type>qos</type>
        </config>
      <classes>
        <class>

```

```

    <class-map-name>IN_CUSTOMERIF$10</class-map-name>
    <config>
      <class-map-name>IN_CUSTOMERIF$10</class-map-name>
      <type>qos</type>
    </config>
  </qos-mode>
  <config>
    <queue-id>0</queue-id>
  </config>
</qos-mode>
</class>
<class>
  <class-map-name>IN_CUSTOMERIF$20</class-map-name>
  <config>
    <class-map-name>IN_CUSTOMERIF$20</class-map-name>
    <type>qos</type>
  </config>
  <qos-mode>
    <config>
      <queue-id>1</queue-id>
    </config>
  </qos-mode>
</class>
</classes>
</policy-map>
<policy-map>
  <policy-map-name>SCHEDULER_POLICY_2</policy-map-name>
  <config>
    <policy-map-name>SCHEDULER_POLICY_2</policy-map-name>
    <type>queuing-default</type>
  </config>
  <classes>
    <class>
      <class-map-name>q0</class-map-name>
      <config>
        <class-map-name>q0</class-map-name>
        <type>queuing-default</type>
      </config>
      <queue-mode>
        <config>
          <weighted-round-robin-queue-weight>5</weighted-round-robin-
queue-weight>
        </config>
        <tail-drops>
          <tail-drop>
            <max-threshold>64000</max-threshold>
            <max-threshold-type>bytes</max-threshold-type>
            <config>
              <max-threshold>64000</max-threshold>
              <max-threshold-type>bytes</max-threshold-type>
            </config>
          </tail-drop>
        </tail-drops>
        <shapes>
          <shape>
            <rate-value>256000000</rate-value>
            <rate-unit>kbps</rate-unit>

```

```

        <config>
            <rate-value>256000000</rate-value>
            <rate-unit>kbps</rate-unit>
        </config>
    </shape>
</shapes>
</queue-mode>
</class>
<class>
    <class-map-name>q1</class-map-name>
    <config>
        <class-map-name>q1</class-map-name>
        <type>queuing-default</type>
    </config>
    <queue-mode>
        <config>
            <weighted-round-robin-queue-weight>14</weighted-round-robin-
queue-weight>
        </config>
        <tail-drops>
            <tail-drop>
                <max-threshold>64000</max-threshold>
                <max-threshold-type>bytes</max-threshold-type>
                <config>
                    <max-threshold>64000</max-threshold>
                    <max-threshold-type>bytes</max-threshold-type>
                </config>
            </tail-drop>
        </tail-drops>
        <shapes>
            <shape>
                <rate-value>256000000</rate-value>
                <rate-unit>kbps</rate-unit>
                <config>
                    <rate-value>256000000</rate-value>
                    <rate-unit>kbps</rate-unit>
                </config>
            </shape>
        </shapes>
    </queue-mode>
</class>
</classes>
</policy-map>
<policy-map>
    <policy-map-name>subif-default-out-policy</policy-map-name>
    <config>
        <policy-map-name>subif-default-out-policy</policy-map-name>
        <type>queuing-default</type>
    </config>
    <classes>
        <class>
            <class-map-name>q1</class-map-name>
            <config>
                <class-map-name>q1</class-map-name>
                <type>queuing-default</type>
            </config>
            <queue-mode>

```

```
        <config>
          <priority-level>0</priority-level>
        </config>
      </queue-mode>
    </class>
    <class>
      <class-map-name>q2</class-map-name>
      <config>
        <class-map-name>q2</class-map-name>
        <type>queuing-default</type>
      </config>
      <queue-mode>
        <config>
          <priority-level>0</priority-level>
        </config>
      </queue-mode>
    </class>
    <class>
      <class-map-name>q3</class-map-name>
      <config>
        <class-map-name>q3</class-map-name>
        <type>queuing-default</type>
      </config>
      <queue-mode>
        <config>
          <priority-level>0</priority-level>
        </config>
      </queue-mode>
    </class>
    <class>
      <class-map-name>q4</class-map-name>
      <config>
        <class-map-name>q4</class-map-name>
        <type>queuing-default</type>
      </config>
      <queue-mode>
        <config>
          <priority-level>0</priority-level>
        </config>
      </queue-mode>
    </class>
    <class>
      <class-map-name>q5</class-map-name>
      <config>
        <class-map-name>q5</class-map-name>
        <type>queuing-default</type>
      </config>
      <queue-mode>
        <config>
          <priority-level>0</priority-level>
        </config>
      </queue-mode>
    </class>
    <class>
      <class-map-name>q6</class-map-name>
      <config>
        <class-map-name>q6</class-map-name>
```

```

        <type>queuing-default</type>
    </config>
    <queue-mode>
        <config>
            <priority-level>0</priority-level>
        </config>
    </queue-mode>
</class>
<class>
    <class-map-name>q7</class-map-name>
    <config>
        <class-map-name>q7</class-map-name>
        <type>queuing-default</type>
    </config>
    <queue-mode>
        <config>
            <priority-level>0</priority-level>
        </config>
    </queue-mode>
</class>
</classes>
</policy-map>
</policy-maps>
</global>
</qos>

```

Validation with NetConf get

Here is the NetConf response that gives detailed information about creating Scheduler-policies entries with leaf max-queue-depth-bytes.

```

<qos xmlns="http://openconfig.net/yang/qos">
  <classifiers>
    <classifier>
      <name>IN_CUSTOMERIF</name>
      <config>
        <name>IN_CUSTOMERIF</name>
        <type>IPv4</type>
      </config>
      <state>
        <name>IN_CUSTOMERIF</name>
        <type>IPv4</type>
      </state>
      <terms>
        <term>
          <id>10</id>
          <config>
            <id>10</id>
          </config>
          <state>
            <id>10</id>
          </state>
          <actions>
            <config>
              <target-group>q0</target-group>
            </config>

```

```
<state>
  <target-group>q0</target-group>
</state>
</actions>
<conditions>
  <ipv4>
    <config>
      <source-address>1.1.1.0/24</source-address>
      <destination-address>2.2.2.0/24</destination-address>
      <dscp>18</dscp>
    </config>
    <state>
      <source-address>1.1.1.0/24</source-address>
      <destination-address>2.2.2.0/24</destination-address>
      <dscp>18</dscp>
    </state>
  </ipv4>
</conditions>
</term>
<term>
  <id>20</id>
  <config>
    <id>20</id>
  </config>
  <state>
    <id>20</id>
  </state>
  <actions>
    <config>
      <target-group>q1</target-group>
    </config>
    <state>
      <target-group>q1</target-group>
    </state>
  </actions>
  <conditions>
    <ipv4>
      <config>
        <source-address>3.3.3.0/24</source-address>
        <destination-address>4.4.4.0/24</destination-address>
        <dscp>26</dscp>
      </config>
      <state>
        <source-address>3.3.3.0/24</source-address>
        <destination-address>4.4.4.0/24</destination-address>
        <dscp>26</dscp>
      </state>
    </ipv4>
  </conditions>
</term>
</terms>
</classifier>
</classifiers>
<scheduler-policies>
  <scheduler-policy>
    <name>SCHEDULER_POLICY_2</name>
  </scheduler-policy>
</scheduler-policy>
```

```

    <name>SCHEDULER_POLICY_2</name>
  </config>
  <state>
    <name>SCHEDULER_POLICY_2</name>
  </state>
  <schedulers>
    <scheduler>
      <sequence>20</sequence>
      <config>
        <sequence>20</sequence>
        <type
          xmlns:oc-qos-types="http://openconfig.net/yang/qos-
types">oc-qos-types:ONE_RATE_TWO_COLOR</type>
          <priority>STRICT</priority>
        </config>
        <inputs>
          <input>
            <id>SCHEDULER_POLICY_AF1</id>
            <config>
              <id>SCHEDULER_POLICY_AF1</id>
              <queue>q0</queue>
              <weight>5</weight>
              <input-type>QUEUE</input-type>
            </config>
            <state>
              <weight>5</weight>
              <id>SCHEDULER_POLICY_AF1</id>
              <queue>q0</queue>
              <input-type>QUEUE</input-type>
            </state>
          </input>
          <input>
            <id>SCHEDULER_POLICY_AF2</id>
            <config>
              <id>SCHEDULER_POLICY_AF2</id>
              <queue>q1</queue>
              <weight>14</weight>
              <input-type>QUEUE</input-type>
            </config>
            <state>
              <weight>14</weight>
              <id>SCHEDULER_POLICY_AF2</id>
              <queue>q1</queue>
              <input-type>QUEUE</input-type>
            </state>
          </input>
        </inputs>
        <state>
          <sequence>20</sequence>
          <type
            xmlns:oc-qos-types="http://openconfig.net/yang/qos-
types">oc-qos-types:ONE_RATE_TWO_COLOR</type>
            <priority>STRICT</priority>
          </state>
          <one-rate-two-color>
            <state>
              <queuing-behavior>SHAPE</queuing-behavior>

```



```

        <max-queue-depth-bytes>64000</max-queue-depth-bytes>
        <cir>256000000</cir>
    </state>
    <config>
        <max-queue-depth-bytes>64000</max-queue-depth-bytes>
        <cir>256000000</cir>
        <queuing-behavior>SHAPE</queuing-behavior>
    </config>
</one-rate-two-color>
</scheduler>
</schedulers>
</scheduler-policy>
</scheduler-policies>
<queue-management-profiles>
    <queue-management-profile>
        <name>q0</name>
        <config>
            <name>q0</name>
        </config>
        <state>
            <name>q0</name>
        </state>
        <wred>
            <uniform>
                <config>
                    <min-threshold>128000</min-threshold>
                    <max-threshold>256000</max-threshold>
                    <weight>20</weight>
                    <max-threshold>90</max-threshold>
                </config>
                <state>
                    <min-threshold>128000</min-threshold>
                    <max-threshold>256000</max-threshold>
                    <weight>20</weight>
                    <max-threshold>90</max-threshold>
                </state>
            </uniform>
        </wred>
    </queue-management-profile>
    <queue-management-profile>
        <name>q1</name>
        <config>
            <name>q1</name>
        </config>
        <state>
            <name>q1</name>
        </state>
        <wred>
            <uniform>
                <config>
                    <min-threshold>256000</min-threshold>
                    <max-threshold>512000</max-threshold>
                    <weight>10</weight>
                    <max-threshold>70</max-threshold>
                </config>
                <state>
                    <min-threshold>256000</min-threshold>

```

```

        <max-threshold>512000</max-threshold>
        <weight>10</weight>
        <max-threshold>70</max-threshold>
    </state>
</uniform>
</wred>
</queue-management-profile>
</queue-management-profiles>
<forwarding-groups>
  <forwarding-group>
    <name>q0</name>
    <config>
      <name>q0</name>
      <output-queue>q0</output-queue>
      <fabric-priority>128</fabric-priority>
    </config>
    <state>
      <name>q0</name>
      <output-queue>q0</output-queue>
      <fabric-priority>128</fabric-priority>
    </state>
  </forwarding-group>
</forwarding-groups>
<queues>
  <queue>
    <name>q0</name>
    <config>
      <name>q0</name>
      <queue-id>0</queue-id>
    </config>
    <state>
      <name>q0</name>
      <queue-id>0</queue-id>
    </state>
  </queue>
  <queue>
    <name>q1</name>
    <config>
      <name>q1</name>
      <queue-id>1</queue-id>
    </config>
    <state>
      <name>q1</name>
      <queue-id>1</queue-id>
    </state>
  </queue>
</queues>
</qos>

```

Restrictions

- The path `/qos/queue-management-profiles` is available on Open Config versions above 1.0.0.
- The path `/qos/queues` has been restructured on Open Config versions above 1.0.0.
- The only valid value for path `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/config/priority` is **STRICT**.

- The leaf name for path `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/inputs/input/config/queue` must have fixed names that follow the pattern **q[0-7]**.
- The scheduler-policies input configuration for OpenConfig XPath `/oc-qos:qos/scheduler-policies/scheduler-policy/schedulers/scheduler/inputs/input/config` now has its leaf `queue` as mandatory in operations **"create"**, **"delete"**, **"remove"** and **"merge"**. This is because the translation mapping done on OcNOS datamodel to XPath `/qos/global/policy-maps/policy-map/classes/class` and the `queue` leaf points to `class-map-name` leaf on OcNOS. If this condition is not addressed, the Translation Framework throws an error when the OpenConfig payload is applied.
- All the paths shown below have restrictions:
 - `/qos/interfaces/interface/input/scheduler-policy`
This association is not valid on OcNOS and is not supported.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/output`
This association is not valid on OcNOS and is not supported.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/bc`
This association is not valid on OcNOS and is not supported.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/cir-pct`
This association is not valid on OcNOS and is not supported.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler`
This list has a fixed max-element as one entry.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/config/type`
This configuration has a fixed value as **ONE_RATE_TWO_COLOR**.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/inputs/input/config/input-type`
This configurations has a fixed value as **QUEUE**.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/cir-pct-remaining`
This association is not valid on OcNOS and is not supported.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/queuing-behavior`
This configuration has a fixed value as **SHAPE**.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/max-queue-depth-packets`
This association is not valid on OcNOS and is not supported.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/config/max-queue-depth-percent`
This association is not valid on OcNOS and is not supported.
 - `/qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/conform-action`
This association is not valid on OcNOS and is not supported.

- /qos/scheduler-policies/scheduler-policy/schedulers/scheduler/one-rate-two-color/exceed-action

This association is not valid on OcNOS and is not supported.

- /qos/scheduler-policies/scheduler-policy/schedulers/scheduler/two-rate-three-color

This association is not valid on OcNOS and is not supported.

Create Interfaces Classifier Association

Release

This configuration was introduced in OcNOS version 6.5.0.

Configuration

On OpenConfig model, the classifier profile can be associated to an interface on egress and ingress direction, and a list of classifiers can be associated to an interface. But on OcNOS model, the interface only allows one classifier object, and the association is in ingress direction.

On OcNOS model, the association between QoS ingress interface and QoS classifier profile needs the hardware-profile `ingress-ipv4-qos` to be enabled before the association. The translation adds the hardware-profile `ingress-ipv4-qos` configuration during translation on XPath `/oc-qos:qos/interfaces/interface/input/classifiers/classifier/config/name`.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create an interfaces classifier association.

```
<qos xmlns="http://openconfig.net/yang/qos">
  <queues>
    <queue>
      <name>q0</name>
      <config>
        <name>q0</name>
        <queue-id>0</queue-id>
      </config>
    </queue>
  </queues>
  <queue-management-profiles>
    <queue-management-profile>
      <name>q0</name>
      <config>
        <name>q0</name>
      </config>
      <wred>
        <uniform>
          <config>
            <min-threshold>128000</min-threshold>
            <max-threshold>256000</max-threshold>
            <weight>20</weight>
          </config>
        </uniform>
      </wred>
    </queue-management-profile>
  </queue-management-profiles>
</qos>
```

```

        <max-drop-probability-percent>90</max-drop-
probability-percent>
    </config>
</uniform>
</wred>
</queue-management-profile>
</queue-management-profiles>
<forwarding-groups>
    <forwarding-group>
        <name>q0</name>
        <config>
            <name>q0</name>
            <output-queue>q0</output-queue>
        </config>
    </forwarding-group>
</forwarding-groups>
<classifiers>
    <classifier>
        <name>IN_CUSTOMERIF</name>
        <config>
            <name>IN_CUSTOMERIF</name>
            <type>IPV4</type>
        </config>
        <terms>
            <term>
                <id>10</id>
                <config>
                    <id>10</id>
                </config>
                <conditions>
                    <ipv4>
                        <config>
                            <source-address>1.1.1.1/24</source-address>
                            <destination-address>2.2.2.2/24</destination-
address>
                                <dscp>af21</dscp>
                            </config>
                        </ipv4>
                    </conditions>
                    <actions>
                        <config>
                            <target-group>q0</target-group>
                        </config>
                    </actions>
                </term>
            </terms>
        </classifier>
    </classifiers>
</interfaces>
    <interface>
        <interface-id>eth2</interface-id>
        <config>
            <interface-id>eth2</interface-id>
        </config>
        <interface-ref>
            <config>
                <interface>eth2</interface>

```

```

        </config>
    </interface-ref>
    <input>
        <classifiers>
            <classifier>
                <type>IPV4</type>
                <config>
                    <name>IN_CUSTOMERIF</name>
                    <type>IPV4</type>
                </config>
            </classifier>
        </classifiers>
    </input>
</interface>
</interfaces>
</qos>

```

OcNOS CLI command

```

hardware-profile filter ingress-ipv4-qos enable
qos enable
!
ip access-list IN_CUSTOMERIF$10
  1 permit tcp 1.1.1.0/24 2.2.2.0/24 dscp af21
!
class-map type qos match-any IN_CUSTOMERIF$10
  match access-group IN_CUSTOMERIF$10
!
policy-map type qos IN_CUSTOMERIF
  class type qos IN_CUSTOMERIF$10
    set queue 0
  exit
  class type qos IN_CUSTOMERIF$20
    set queue 1
  exit
!
interface eth2
  service-policy type qos input IN_CUSTOMERIF
!

```

OcNOS NetConf Payload

```

platform">
  <profiles xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-
    <hardware-profile>
      <filters>
        <config>
          <ingress-ipv4-qos/>
        </config>
      </filters>
    </hardware-profile>
  </profiles>
  <acl xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-acl">
    <acl-sets>
      <acl-set>
        <name>IN_CUSTOMERIF$10</name>

```

```

    <type>ip</type>
  <config>
    <name>IN_CUSTOMERIF$10</name>
    <type>ip</type>
  </config>
</acl-entries>
<acl-entry>
  <sequence-id>1</sequence-id>
  <config>
    <sequence-id>1</sequence-id>
  </config>
  <ipv4>
    <config>
      <forwarding-action>permit</forwarding-action>
      <source-address>1.1.1.0/24</source-address>
      <destination-address>2.2.2.0/24</destination-address>
      <dscp>af21</dscp>
      <protocol-tcp/>
    </config>
  </ipv4>
</acl-entry>
</acl-entries>
</acl-set>
</acl-sets>
</acl>
<qos xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-qos">
  <global>
    <config>
      <enable-qos>enable</enable-qos>
    </config>
    <class-maps>
      <class-map>
        <name>IN_CUSTOMERIF$10</name>
        <config>
          <name>IN_CUSTOMERIF$10</name>
          <type>qos</type>
          <match-criteria>match-any</match-criteria>
        </config>
        <match-any-conditions>
          <config>
            <access-control-list-name>IN_CUSTOMERIF$10</access-control-
list-name>
          </config>
        </match-any-conditions>
      </class-map>
    </class-maps>
    <policy-maps>
      <policy-map>
        <policy-map-name>IN_CUSTOMERIF</policy-map-name>
        <config>
          <policy-map-name>IN_CUSTOMERIF</policy-map-name>
          <type>qos</type>
        </config>
        <classes>
          <class>
            <class-map-name>IN_CUSTOMERIF$10</class-map-name>
            <config>

```

```

        <class-map-name>IN_CUSTOMERIF$10</class-map-name>
        <type>qos</type>
      </config>
    </qos-mode>
    <config>
      <queue-id>0</queue-id>
    </config>
  </qos-mode>
</class>
</classes>
</policy-map>
</policy-maps>
</global>
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-qos-if">
  <interface>
    <name>eth2</name>
    <config>
      <name>eth2</name>
    </config>
    <service-policy>
      <ingress>
        <config>
          <type-qos-policy-map-name>IN_CUSTOMERIF</type-qos-policy-map-
name>
        </config>
      </ingress>
    </service-policy>
  </interface>
</interfaces>

```

Validation with NetConf get

```

<qos xmlns="http://openconfig.net/yang/qos">
  <classifiers>
    <classifier>
      <name>IN_CUSTOMERIF</name>
      <config>
        <name>IN_CUSTOMERIF</name>
        <type>IPv4</type>
      </config>
      <state>
        <name>IN_CUSTOMERIF</name>
        <type>IPv4</type>
      </state>
      <terms>
        <term>
          <id>10</id>
          <config>
            <id>10</id>
          </config>
          <state>
            <id>10</id>
          </state>
          <actions>
            <config>
              <target-group>q0</target-group>
            </config>

```



```
<state>
  <target-group>q0</target-group>
</state>
</actions>
<conditions>
  <ipv4>
    <config>
      <source-address>1.1.1.0/24</source-address>
      <destination-address>2.2.2.0/24</destination-address>
      <dscp>18</dscp>
    </config>
    <state>
      <source-address>1.1.1.0/24</source-address>
      <destination-address>2.2.2.0/24</destination-address>
      <dscp>18</dscp>
    </state>
  </ipv4>
</conditions>
</term>
<term>
  <id>20</id>
  <config>
    <id>20</id>
  </config>
  <state>
    <id>20</id>
  </state>
  <actions>
    <config>
      <target-group>q1</target-group>
    </config>
    <state>
      <target-group>q1</target-group>
    </state>
  </actions>
  <conditions>
    <ipv4>
      <config>
        <source-address>3.3.3.0/24</source-address>
        <destination-address>4.4.4.0/24</destination-address>
        <dscp>26</dscp>
      </config>
      <state>
        <source-address>3.3.3.0/24</source-address>
        <destination-address>4.4.4.0/24</destination-address>
        <dscp>26</dscp>
      </state>
    </ipv4>
  </conditions>
</term>
</terms>
</classifier>
</classifiers>
<interfaces>
  <interface>
    <interface-id>eth2</interface-id>
    <config>
```

```

    <interface-id>eth2</interface-id>
  </config>
  <input>
    <classifiers>
      <classifier>
        <config>
          <name>IN_CUSTOMERIF</name>
          <type>IPv4</type>
        </config>
        <type>IPv4</type>
        <state>
          <name>IN_CUSTOMERIF</name>
          <type>IPv4</type>
        </state>
        <terms>
          <term>
            <id>10</id>
            <state>
              <id>10</id>
              <matched-packets>0</matched-packets>
              <matched-octets>0</matched-octets>
            </state>
          </term>
          <term>
            <id>20</id>
            <state>
              <id>20</id>
              <matched-packets>0</matched-packets>
              <matched-octets>0</matched-octets>
            </state>
          </term>
        </terms>
      </classifier>
    </classifiers>
  </input>
  <interface-ref>
    <config>
      <interface>eth2</interface>
    </config>
    <state>
      <interface>eth2</interface>
    </state>
  </interface-ref>
  <state>
    <interface-id>eth2</interface-id>
  </state>
</interface>
</interfaces>
<queue-management-profiles>
  <queue-management-profile>
    <name>q0</name>
    <config>
      <name>q0</name>
    </config>
    <state>
      <name>q0</name>
    </state>
  </queue-management-profile>
</queue-management-profiles>

```

```

    <wred>
      <uniform>
        <config>
          <min-threshold>128000</min-threshold>
          <max-threshold>256000</max-threshold>
          <weight>20</weight>
          <max-threshold>90</max-threshold>
        </config>
        <state>
          <min-threshold>128000</min-threshold>
          <max-threshold>256000</max-threshold>
          <weight>20</weight>
          <max-threshold>90</max-threshold>
        </state>
      </uniform>
    </wred>
  </queue-management-profile>
</queue-management-profile>
  <name>q1</name>
  <config>
    <name>q1</name>
  </config>
  <state>
    <name>q1</name>
  </state>
  <wred>
    <uniform>
      <config>
        <min-threshold>256000</min-threshold>
        <max-threshold>512000</max-threshold>
        <weight>10</weight>
        <max-threshold>70</max-threshold>
      </config>
      <state>
        <min-threshold>256000</min-threshold>
        <max-threshold>512000</max-threshold>
        <weight>10</weight>
        <max-threshold>70</max-threshold>
      </state>
    </uniform>
  </wred>
</queue-management-profile>
</queue-management-profiles>
<forwarding-groups>
  <forwarding-group>
    <name>q0</name>
    <config>
      <name>q0</name>
      <output-queue>q0</output-queue>
      <fabric-priority>128</fabric-priority>
    </config>
    <state>
      <name>q0</name>
      <output-queue>q0</output-queue>
      <fabric-priority>128</fabric-priority>
    </state>
  </forwarding-group>

```

```

</forwarding-groups>
<queues>
  <queue>
    <name>q0</name>
    <config>
      <name>q0</name>
      <queue-id>0</queue-id>
    </config>
    <state>
      <name>q0</name>
      <queue-id>0</queue-id>
    </state>
  </queue>
  <queue>
    <name>q1</name>
    <config>
      <name>q1</name>
      <queue-id>1</queue-id>
    </config>
    <state>
      <name>q1</name>
      <queue-id>1</queue-id>
    </state>
  </queue>
</queues>
</qos>

```

Restrictions

- The translation of XPath `/oc-qos:qos/interfaces/interface/input/classifiers/classifier/config/name` adds the OcNOS hardware-profile `ingress-ipv4-qos` configuration.
- Path `/qos/queue-management-profiles` is available on OpenConfig versions above 1.0.0.
- Path `/qos/queues` has been restructured on Open Config versions above 1.0.0.
- All the paths shown below have restrictions:
 - `/qos/interfaces/interface/input/classifiers`
Only one entry can be inserted on this list.
 - `/qos/interfaces/interface/output/classifiers`
This association is not supported on OcNOS model.
 - `/qos/interfaces/interface/interface-id`
This leaf must have the format “<interface>.<subinterface>”, e.g., xe10.2, and it is limited to 32 characters.

Create Interfaces Scheduler-policies Association

Release

This configuration was introduced in OcNOS version 6.5.0.

Configuration

On OpenConfig model, the Scheduler-policies profile can be associated to an interface on egress and ingress direction.

But on OcNOS model, the interface only allows one scheduler-policies object, and the association is in ingress direction.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to create interfaces scheduler-policies association.

```
<qos xmlns="http://openconfig.net/yang/qos">
  <queues>
    <queue>
      <name>q0</name>
      <config>
        <name>q0</name>
        <queue-id>0</queue-id>
      </config>
    </queue>
  </queues>
  <queue-management-profiles>
    <queue-management-profile>
      <name>q0</name>
      <config>
        <name>q0</name>
      </config>
      <wred>
        <uniform>
          <config>
            <min-threshold>128000</min-threshold>
            <max-threshold>256000</max-threshold>
            <weight>20</weight>
            <max-drop-probability-percent>90</max-drop-
probability-percent>
          </config>
        </uniform>
      </wred>
    </queue-management-profile>
  </queue-management-profiles>
  <forwarding-groups>
    <forwarding-group>
      <name>q0</name>
      <config>
        <name>q0</name>
        <output-queue>q0</output-queue>
      </config>
    </forwarding-group>
  </forwarding-groups>
  <scheduler-policies>
    <scheduler-policy>
      <name>SCHEDULER_POLICY_1</name>
      <config>
        <name>SCHEDULER_POLICY_1</name>
      </config>
    </scheduler-policy>
  </scheduler-policies>
</qos>
```

```

    <scheduler>
      <sequence>10</sequence>
      <config>
        <sequence>10</sequence>
        <type>ONE_RATE_TWO_COLOR</type>
        <priority>STRICT</priority>
      </config>
      <inputs>
        <input>
          <id>SCHEDULER_POLICY_AF1</id>
          <config>
            <id>SCHEDULER_POLICY_AF1</id>
            <input-type>QUEUE</input-type>
            <queue>q0</queue>
            <weight>5</weight>
          </config>
        </input>
      </inputs>
    </scheduler>
  </schedulers>
</scheduler-policies>
</scheduler-policies>
<interfaces>
  <interface>
    <interface-id>eth2</interface-id>
    <config>
      <interface-id>eth2</interface-id>
    </config>
    <interface-ref>
      <config>
        <interface>eth2</interface>
      </config>
    </interface-ref>
    <output>
      <scheduler-policy>
        <config>
          <name>SCHEDULER_POLICY_1</name>
        </config>
      </scheduler-policy>
    </output>
  </interface>
</interfaces>
</qos>

```

OcNOS CLI command

The below CLI command is used to create interfaces scheduler-policies association.

```

qos enable
!
policy-map type queuing default SCHEDULER_POLICY_1
  class type queuing default q0
    wrr-queue weight 5
    random-detect min-threshold 128000 max-threshold 256000 bytes drop-
probability 80
  exit
!

```

```

interface eth2
  service-policy type queuing output SCHEDULER_POLICY_1
!
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to create interfaces scheduler-policies association.

```

    <qos xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-qos">
<global>
  <config>
    <enable-qos>enable</enable-qos>
  </config>
  <policy-maps>
    <policy-map>
      <policy-map-name>SCHEDULER_POLICY_1</policy-map-name>
      <config>
        <policy-map-name>SCHEDULER_POLICY_1</policy-map-name>
        <type>queuing-default</type>
      </config>
      <classes>
        <class>
          <class-map-name>q0</class-map-name>
          <config>
            <class-map-name>q0</class-map-name>
            <type>queuing-default</type>
          </config>
          <queue-mode>
            <config>
              <weighted-round-robin-queue-weight>5</weighted-round-
robin-queue-weight>
            </config>
            <red>
              <wred>
                <config>
                  <min-threshold>128000</min-threshold>
                  <threshold-unit>bytes</threshold-unit>
                  <max-threshold>256000</max-threshold>
                  <drop-probability>80</drop-probability>
                </config>
              </wred>
            </red>
          </queue-mode>
        </class>
      </classes>
    </policy-map>
  </policy-maps>
</global>
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-qos-if">
  <interface>
    <name>eth2</name>
    <config>
      <name>eth2</name>
    </config>
    <service-policy>
      <egress>
        <config>
```

```

        <type-queuing-policy-map-name>SCHEDULER_POLICY_1</type-
queuing-policy-map-name>
    </config>
</egress>
</service-policy>
</interface>
</interfaces>
</qos>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about creating interfaces scheduler-policies association.

```

<qos xmlns="http://openconfig.net/yang/qos">
  <scheduler-policies>
    <scheduler-policy>
      <name>SCHEDULER_POLICY_1</name>
      <config>
        <name>SCHEDULER_POLICY_1</name>
      </config>
      <state>
        <name>SCHEDULER_POLICY_1</name>
      </state>
      <schedulers>
        <scheduler>
          <sequence>10</sequence>
          <config>
            <sequence>10</sequence>
            <type
qos-types:ONE_RATE_TWO_COLOR xmlns:oc-qos-types="http://openconfig.net/yang/qos-types">oc-
</type>
            <priority>STRICT</priority>
          </config>
          <inputs>
            <input>
              <id>SCHEDULER_POLICY_AF1</id>
              <config>
                <id>SCHEDULER_POLICY_AF1</id>
                <queue>q0</queue>
                <weight>5</weight>
                <input-type>QUEUE</input-type>
              </config>
              <state>
                <weight>5</weight>
                <id>SCHEDULER_POLICY_AF1</id>
                <queue>q0</queue>
                <input-type>QUEUE</input-type>
              </state>
            </input>
          </inputs>
          <state>
            <sequence>10</sequence>
            <type
qos-types:ONE_RATE_TWO_COLOR xmlns:oc-qos-types="http://openconfig.net/yang/qos-types">oc-
            </type>
            <priority>STRICT</priority>
          </state>
        </scheduler>
      </schedulers>
    </scheduler-policy>
  </scheduler-policies>
</qos>

```



```
        </state>
      </scheduler>
    </schedulers>
  </scheduler-policy>
</scheduler-policies>
<interfaces>
  <interface>
    <interface-id>eth2</interface-id>
    <config>
      <interface-id>eth2</interface-id>
    </config>
    <output>
      <scheduler-policy>
        <config>
          <name>SCHEDULER_POLICY_1</name>
        </config>
        <state>
          <name>SCHEDULER_POLICY_1</name>
        </state>
        <schedulers>
          <scheduler>
            <sequence>10</sequence>
            <state>
              <sequence>10</sequence>
              <conforming-octets>0</conforming-octets>
              <conforming-pkts>0</conforming-pkts>
              <exceeding-octets>0</exceeding-octets>
              <exceeding-pkts>0</exceeding-pkts>
            </state>
          </scheduler>
        </schedulers>
      </scheduler-policy>
    </output>
    <interface-ref>
      <config>
        <interface>eth2</interface>
      </config>
      <state>
        <interface>eth2</interface>
      </state>
    </interface-ref>
    <state>
      <interface-id>eth2</interface-id>
    </state>
  </interface>
</interfaces>
<queue-management-profiles>
  <queue-management-profile>
    <name>q0</name>
    <config>
      <name>q0</name>
    </config>
    <state>
      <name>q0</name>
    </state>
    <wred>
      <uniform>
```

```

    <config>
      <min-threshold>128000</min-threshold>
      <max-threshold>256000</max-threshold>
      <weight>20</weight>
      <max-threshold>90</max-threshold>
    </config>
  </state>
  <min-threshold>128000</min-threshold>
  <max-threshold>256000</max-threshold>
  <weight>20</weight>
  <max-threshold>90</max-threshold>
</state>
</uniform>
</wred>
</queue-management-profile>
<queue-management-profile>
  <name>q1</name>
  <config>
    <name>q1</name>
  </config>
  <state>
    <name>q1</name>
  </state>
</wred>
  <uniform>
    <config>
      <min-threshold>256000</min-threshold>
      <max-threshold>512000</max-threshold>
      <weight>10</weight>
      <max-threshold>70</max-threshold>
    </config>
    <state>
      <min-threshold>256000</min-threshold>
      <max-threshold>512000</max-threshold>
      <weight>10</weight>
      <max-threshold>70</max-threshold>
    </state>
  </uniform>
</wred>
</queue-management-profile>
</queue-management-profiles>
<forwarding-groups>
  <forwarding-group>
    <name>q0</name>
    <config>
      <name>q0</name>
      <output-queue>q0</output-queue>
      <fabric-priority>128</fabric-priority>
    </config>
    <state>
      <name>q0</name>
      <output-queue>q0</output-queue>
      <fabric-priority>128</fabric-priority>
    </state>
  </forwarding-group>
</forwarding-groups>
<queues>

```

```
<queue>
  <name>q0</name>
  <config>
    <name>q0</name>
    <queue-id>0</queue-id>
  </config>
  <state>
    <name>q0</name>
    <queue-id>0</queue-id>
  </state>
</queue>
<queue>
  <name>q1</name>
  <config>
    <name>q1</name>
    <queue-id>1</queue-id>
  </config>
  <state>
    <name>q1</name>
    <queue-id>1</queue-id>
  </state>
</queue>
</queues>
</qos>
```

Restrictions

- The path `/qos/queue-management-profiles` is available on Open Config versions above 1.0.0.
- The path `/qos/queues` has been restructured on OpenConfig versions above 1.0.0.
- The path `/qos/interfaces/interface/interface-id` has the following restriction:
 - It must be in the format **<interface>.<subinterface>** For example: `xe10.2`, and limited to 32 characters.

EVPN Openconfig Translation

Configure EVPN-MAC with inter-instance-policies

This XML configuration snippet is used to configure EVPN-MAC with inter-instance-policies. Use the below commands to configure only the MAC-VRF entry with route-target configured.

Release

This configuration was introduced in OcNOS version 6.1.0.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure only the MAC-VRF entry with route-target configured.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>object-test</name>
    <config>
      <name>object-test</name>
      <type xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
      <router-id>102.143.73.1</router-id>
      <route-distinguisher>102.143.73.1:2</route-distinguisher>
    </config>
    <encapsulation>
      <config>
        <encapsulation-type>MPLS</encapsulation-type>
      </config>
    </encapsulation>
    <inter-instance-policies>
      <import-export-policy>
        <config>
          <export-route-target>6:6</export-route-target>
          <import-route-target>6:6</import-route-target>
          <export-route-target>3:3</export-route-target>
        </config>
      </import-export-policy>
    </inter-instance-policies>
  </network-instance>
</network-instances>
```

OcNOS CLI Command

The below CLI is used to configure only the MAC-VRF entry with route-target configured.

```
mac vrf object-test
router-id 102.143.73.1
rd 102.143.73.1:2
```

```

route-target export 3:3
route-target both 6:6
!

```

OcNOS NetConf Payload

Here is a sample of OcNOS NetConf Payload to configure only the MAC-VRF entry with route-target configured.

```

<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-network-
instance">
  <network-instance>
    <instance-name>object-test</instance-name>
    <instance-type>mac-vrf</instance-type>
    <config>
      <instance-name>object-test</instance-name>
      <instance-type>mac-vrf</instance-type>
    </config>
    <vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vrf">
      <config>
        <vrf-name>object-test</vrf-name>
        <router-id>102.143.73.1</router-id>
      </config>
      <bgp-vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp-vrf">
        <config>
          <rd-string>102.143.73.1:2</rd-string>
        </config>
        <route-target>
          <rt-rd-string>3:3</rt-rd-string>
          <config>
            <rt-rd-string>3:3</rt-rd-string>
            <direction>export</direction>
          </config>
        </route-target>
        <route-target>
          <rt-rd-string>6:6</rt-rd-string>
          <config>
            <rt-rd-string>6:6</rt-rd-string>
            <direction>import export</direction>
          </config>
        </route-target>
      </bgp-vrf>
    </vrf>
  </network-instance>
</network-instances>

```

Validation with NetConf get

Here is a NetConf validation response that provides information about configuring only the MAC-VRF entry with route-target configured.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>object-test</name>
    <config>
      <name>object-test</name>
      <type>

```

```

        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
        <router-id>102.143.73.1</router-id>
        <route-distinguisher>102.143.73.1:2</route-distinguisher>
    </config>
    <encapsulation>
        <config>
            <encapsulation-type
types">oc-ni-types:MPLS</encapsulation-type>
            </config>
        <state>
            <encapsulation-type
types">oc-ni-types:MPLS</encapsulation-type>
            </state>
        </encapsulation>
    <state>
        <name>object-test</name>
        <type
types">oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
        <router-id>102.143.73.1</router-id>
        <route-distinguisher>102.143.73.1:2</route-distinguisher>
    </state>
    <inter-instance-policies>
        <import-export-policy>
            <config>
                <export-route-target>3:3</export-route-target>
                <export-route-target>6:6</export-route-target>
                <import-route-target>6:6</import-route-target>
            </config>
            <state>
                <export-route-target>3:3</export-route-target>
                <export-route-target>6:6</export-route-target>
                <import-route-target>6:6</import-route-target>
            </state>
        </import-export-policy>
    </inter-instance-policies>
</network-instance>
</network-instances>

```

Restrictions

- MAC-VRF entry cannot be configured by OpenConfig without route-target.
- The leaves mentioned below must be configured:
 - network-instances/network-instance/config/router-id
 - network-instances/network-instance/config/route-distinguisher

Configure EVPN-VPLS type

This XML configuration snippet is used to configure EVPN-VPLS type.

Release

This configuration was introduced in OcNOS version 6.1.0.

Initial Configuration:

Here is the initial configuration necessary to be implemented before applying EVPN-VPLS configuration.

```
router ldp
!
interface lo
 ip address 10.143.73.1/32 secondary
!
interface eth4
 ip address 10.255.128.8/31
 label-switching
 enable-ldp ipv4
!
interface eth2.1001 switchport
 encapsulation dot1q 1001
!
ospf area-interface-config-mode
 router ospf 100
  ospf router-id 10.143.73.1
  area 0.0.0.0 interface eth4
  area 0.0.0.0 interface lo
```

OcNOS CLI Command

The below CLI command is used to configure EVPN-VPLS type.

```
evpn mpls enable
!
mac vrf vpls1001
 router-id 10.143.73.1
 rd 10.143.73.1:1001
 route-target both 1001:1001
!
evpn mpls vtep-ip-global 10.143.73.1
!
evpn mpls id 1001
 host-reachability-protocol evpn-bgp vpls1001
!
interface eth2.1001 switchport
 encapsulation dot1q 1001
 access-if-evpn
 map vpn-id 1001
!
router bgp 65010
 neighbor 10.143.73.3 remote-as 65010
 neighbor 10.143.73.3 update-source lo
!
 address-family l2vpn evpn
 neighbor 10.143.73.3 activate
 exit-address-family
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure EVPN-VPLS type.

```
<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-network-
instance">
  <network-instance>
    <instance-name>default</instance-name>
    <instance-type>vrf</instance-type>
    <vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vrf">
      <config>
        <vrf-name>default</vrf-name>
      </config>
    </vrf>
    <config>
      <instance-name>default</instance-name>
      <instance-type>vrf</instance-type>
    </config>
  </network-instance>
  <network-instance>
    <instance-name>vpls1001</instance-name>
    <instance-type>mac-vrf</instance-type>
    <config>
      <instance-name>vpls1001</instance-name>
      <instance-type>mac-vrf</instance-type>
    </config>
    <vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vrf">
      <config>
        <vrf-name>vpls1001</vrf-name>
      </config>
      <bgp-vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp-vrf">
        <config>
          <rd-string>10.143.73.1:1001</rd-string>
        </config>
        <route-target>
          <rt-rd-string>1001:1001</rt-rd-string>
          <config>
            <rt-rd-string>1001:1001</rt-rd-string>
            <direction>import export</direction>
          </config>
        </route-target>
      </bgp-vrf>
    </vrf>
  </network-instance>
</network-instances>
<bgp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp">
  <bgp-instance>
    <bgp-as>65010</bgp-as>
    <config>
      <bgp-as>65010</bgp-as>
    </config>
    <peer>
      <peer-address>10.143.73.3</peer-address>
      <config>
        <peer-address>10.143.73.3</peer-address>
        <peer-as>65010</peer-as>
        <source-identifier>lo</source-identifier>
```



```

    </config>
    <address-family>
      <afi>l2vpn</afi>
      <safi>evpn</safi>
      <config>
        <afi>l2vpn</afi>
        <safi>evpn</safi>
        <activate />
      </config>
    </address-family>
  </peer>
  <address-family>
    <afi>l2vpn</afi>
    <safi>evpn</safi>
    <config>
      <afi>l2vpn</afi>
      <safi>evpn</safi>
    </config>
  </address-family>
</bgp-instance>
</bgp>
<evpn-mpls xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-evpn-mpls">
  <mpls-tenant>
    <tenant-identifier>1001</tenant-identifier>
    <config>
      <vrf-name>vpls1001</vrf-name>
      <tenant-identifier>1001</tenant-identifier>
    </config>
  </mpls-tenant>
</global>
  <config>
    <enable-evpn-mpls />
    <vtep-ipv4>10.143.73.1</vtep-ipv4>
  </config>
</global>
</evpn-mpls>
<evpn xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-ethernet-vpn">
  <interfaces>
    <interface>
      <name>eth2.1001</name>
      <config>
        <name>eth2.1001</name>
      </config>
      <access-interfaces>
        <access-interface>
          <access-if>access-if-evpn</access-if>
          <config>
            <access-if>access-if-evpn</access-if>
            <evpn-identifier>1001</evpn-identifier>
          </config>
        </access-interface>
      </access-interfaces>
    </interface>
  </interfaces>
</evpn>
<interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
  <interface>

```

```

    <name>eth2.1001</name>
    <config>
      <enable-switchport />
    </config>
  </interface>
</interfaces>

```

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure EVPN-VPLS type.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <config>
      <name>default</name>
      <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
      </config>
      <protocols>
        <protocol>
          <identifier
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
          <name>DIRECTLY_CONNECTED</name>
          <config>
            <identifier
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <enabled>true</enabled>
          </config>
        </protocol>
        <protocol>
          <identifier
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:OSPF</identifier>
          <name>100</name>
          <ospfv2>
            <global>
              <config>
                <router-id>10.143.73.1</router-id>
                <log-adjacency-changes>false</log-adjacency-changes>
              </config>
            </global>
            <areas>
              <area>
                <identifier>0.0.0.0</identifier>
                <config>
                  <identifier>0.0.0.0</identifier>
                </config>
                <interfaces>
                  <interface>
                    <id>eth4</id>
                    <config>
                      <id>eth4</id>

```

```

        </config>
        <interface-ref>
            <config>
                <interface>eth4</interface>
            </config>
        </interface-ref>
    </interface>
    <interface>
        <id>lo</id>
        <config>
            <id>lo</id>
            </config>
            <interface-ref>
                <config>
                    <interface>lo</interface>
                </config>
            </interface-ref>
        </interface>
    </interfaces>
</area>
</areas>
</ospfv2>
<config>
    <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:OSPF</identifier>
        <name>100</name>
        <enabled>true</enabled>
    </config>
</protocol>
<protocol>
    <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGPP</identifier>
        <name>65010</name>
        <bgp>
            <global>
                <config>
                    <as>65010</as>
                </config>
                <afi-safis>
                    <afi-safi>
                        <afi-safi-name
                            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
                            <config>
                                <afi-safi-name
                                    xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
                                    <enabled>true</enabled>
                                </config>
                            </afi-safi>
                        </afi-safis>
                    </global>
                    <neighbors>
                        <neighbor>
                            <neighbor-address>10.143.73.3</neighbor-address>

```

```

        <afi-safis>
        <afi-safi>
        <afi-safi-name
            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
        <config>
        <afi-safi-name
            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
        <enabled>true</enabled>
        </config>
        </afi-safi>
    </afi-safis>
    <config>
        <enabled>true</enabled>
        <neighbor-address>10.143.73.3</neighbor-address>
        <peer-as>65010</peer-as>
    </config>
    <transport>
        <config>
            <local-address>lo</local-address>
        </config>
    </transport>
    </neighbor>
</neighbors>
</bgp>
<config>
    <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:BGP</identifier>
    <name>65010</name>
    <enabled>true</enabled>
</config>
</protocol>
</protocols>
<tables>
    <table>
        <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
            xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        <config>
            <protocol
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
            <address-family
                xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">oc-types:IPv4</address-family>
            </config>
        </table>
    </table>
        <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family

```

```

        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPV6</address-family>
        <config>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">oc-types:IPV6</address-family>
        </config>
        </table>
        <table>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:STATIC</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPV4</address-family>
        <config>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:STATIC</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">oc-types:IPV4</address-family>
        </config>
        </table>
        <table>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:STATIC</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPV6</address-family>
        <config>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:STATIC</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">oc-types:IPV6</address-family>
        </config>
        </table>
        <table>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:OSPF</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPV4</address-family>
        <config>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:OSPF</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">oc-types:IPV4</address-family>
        </config>
        </table>

```

```

        <table>
          <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
            <address-family
              xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
              <config>
                <protocol
                  xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:BGP</protocol>
                  <address-family
                    xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">oc-types:IPv4</address-family>
                    </config>
                  </table>
                </table>
              </table>
            </table>
          <table>
            <protocol
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
              <address-family
                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
                <config>
                  <protocol
                    xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:BGP</protocol>
                    <address-family
                      xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">oc-types:IPv6</address-family>
                      </config>
                    </table>
                  </table>
                </table>
              </table>
            <table>
              <protocol
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
                <address-family
                  xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:MPLS</address-family>
                  <config>
                    <protocol
                      xmlns:oc-pol-types="http://openconfig.net/yang/policy-
types">oc-pol-types:BGP</protocol>
                      <address-family
                        xmlns:oc-types="http://openconfig.net/yang/openconfig-
types">oc-types:MPLS</address-family>
                        </config>
                      </table>
                    </table>
                  </table>
                </table>
              </table>
            </table>
          </network-instance>
        <network-instance>
          <name>vpls1001</name>
          <config>
            <name>vpls1001</name>
            <type
              xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
            <router-id>10.143.73.1</router-id>
            <route-distinguisher>10.143.73.1:1001</route-distinguisher>

```

```

    </config>
    <encapsulation>
      <config>
        <encapsulation-type
          xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:MPLS</encapsulation-type>
        </config>
      </encapsulation>
    <inter-instance-policies>
      <import-export-policy>
        <config>
          <export-route-target>1001:1001</export-route-target>
          <import-route-target>1001:1001</import-route-target>
        </config>
      </import-export-policy>
    </inter-instance-policies>
    <connection-points>
      <connection-point>
        <connection-point-id>1001</connection-point-id>
        <config>
          <connection-point-id>1001</connection-point-id>
        </config>
      <endpoints>
        <endpoint>
          <endpoint-id>1001</endpoint-id>
          <config>
            <endpoint-id>1001</endpoint-id>
          </config>
          <local>
            <config>
              <interface>eth2</interface>
              <subinterface>1001</subinterface>
            </config>
          </local>
          <remote/>
        </endpoint>
      </endpoints>
    </connection-point>
  </connection-points>
  <evpn>
    <evpn-instances>
      <evpn-instance>
        <evi>1001</evi>
        <config>
          <evi>1001</evi>
          <encapsulation-type
            xmlns:oc-ni-types="http://openconfig.net/yang/network-
instance-types">oc-ni-types:MPLS</encapsulation-type>
          </config>
        </evpn-instance>
      </evpn-instances>
    </evpn>
  </network-instance>
</network-instances>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about configuring EVPN-VPLS type.

```
<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <config>
      <name>default</name>
      <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
      </config>
      <state>
        <name>default</name>
        <type
          xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
        </state>
        <protocols>
          <protocol>
            <identifier
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <config>
              <identifier
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
              <name>DIRECTLY_CONNECTED</name>
              <enabled>true</enabled>
            </config>
            <state>
              <identifier
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
              <name>DIRECTLY_CONNECTED</name>
              <enabled>true</enabled>
            </state>
          </protocol>
          <protocol>
            <identifier
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:OSPF</identifier>
            <name>100</name>
            <ospfv2>
              <global>
                <config>
                  <router-id>10.143.73.1</router-id>
                  <log-adjacency-changes>false</log-adjacency-changes>
                </config>
                <state>
                  <log-adjacency-changes>false</log-adjacency-changes>
                  <router-id>10.143.73.1</router-id>
                </state>
              </global>
            <areas>
              <area>
```



```

    <identifier>0.0.0.0</identifier>
    <config>
      <identifier>0.0.0.0</identifier>
    </config>
    <state>
      <identifier>0.0.0.0</identifier>
    </state>
    <interfaces>
      <interface>
        <id>eth4</id>
        <config>
          <id>eth4</id>
        </config>
        <interface-ref>
          <config>
            <interface>eth4</interface>
          </config>
        </interface-ref>
        <state>
          <id>eth4</id>
        </state>
      </interface>
      <interface>
        <id>lo</id>
        <config>
          <id>lo</id>
        </config>
        <interface-ref>
          <config>
            <interface>lo</interface>
          </config>
        </interface-ref>
        <state>
          <id>lo</id>
        </state>
      </interface>
    </interfaces>
  </area>
</areas>
</ospfv2>
<config>
  <identifier
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:OSPF</identifier>
    <name>100</name>
    <enabled>true</enabled>
  </config>
</protocol>
<protocol>
  <identifier
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
    <name>65010</name>
    <bgp>
      <global>
        <config>
          <as>65010</as>

```

```

</config>
<state>
  <as>65010</as>
  <total-prefixes>0</total-prefixes>
</state>
<afi-safis>
  <afi-safi>
    <afi-safi-name
      xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
    <config>
      <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
      <enabled>true</enabled>
    </config>
    <add-paths>
      <state>
        <receive>>false</receive>
        <send>>false</send>
      </state>
    </add-paths>
    <state>
      <afi-safi-name
        xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
      <enabled>true</enabled>
    </state>
  </afi-safi>
</afi-safis>
</global>
<neighbors>
  <neighbor>
    <neighbor-address>10.143.73.3</neighbor-address>
    <afi-safis>
      <afi-safi>
        <afi-safi-name
          xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
        <config>
          <afi-safi-name
            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
          <enabled>true</enabled>
        </config>
        <state>
          <afi-safi-name
            xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
          <enabled>true</enabled>
        </state>
      </afi-safi>
    </afi-safis>
  </neighbor>
  <neighbor>
    <neighbor-address>10.143.73.3</neighbor-address>
    <peer-as>65010</peer-as>
  </neighbor>
</neighbors>
</config>

```

```

        <transport>
          <config>
            <local-address>lo</local-address>
          </config>
          <state>
            <local-address>lo</local-address>
          </state>
        </transport>
        <state>
          <enabled>true</enabled>
          <neighbor-address>10.143.73.3</neighbor-address>
          <peer-as>65010</peer-as>
        </state>
      </neighbor>
    </neighbors>
  </bgp>
  <config>
    <identifier
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGPP</identifier>
    <name>65010</name>
    <enabled>true</enabled>
  </config>
  <state>
    <enabled>true</enabled>
    <identifier
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGPP</identifier>
    <name>65010</name>
  </state>
</protocol>
</protocols>
<tables>
  <table>
    <protocol
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
    <address-family
      xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
    <config>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
      <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
      </config>
      <state>
        <protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
          <address-family
            xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
          </state>
        </table>
      </table>
    </table>
  </table>

```

```

    <protocol
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
    <address-family
      xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
    <config>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        </config>
      <state>
        <protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
          <address-family
            xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
          </state>
        </table>
      <table>
        <protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:STATIC</protocol>
          <address-family
            xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
          <config>
            <protocol
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:STATIC</protocol>
              <address-family
                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
              </config>
            </table>
          <table>
            <protocol
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:STATIC</protocol>
              <address-family
                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
              <config>
                <protocol
                  xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:STATIC</protocol>
                  <address-family
                    xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
                  </config>
                </table>
              <table>
                <protocol
                  xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:OSPF</protocol>

```

```

    <address-family
      xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
    <config>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:OSPF</protocol>
        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        </config>
      </table>
    </table>
    <table>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>
        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        <config>
          <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
            <address-family
              xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
            </config>
          </table>
        </table>
        <table>
          <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>
            <address-family
              xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
            <config>
              <protocol
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
                <address-family
                  xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
                </config>
              </table>
            </table>
          </table>
          <table>
            <protocol
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>
              <address-family
                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:MPLS</address-family>
              <config>
                <protocol
                  xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
                  <address-family
                    xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:MPLS</address-family>
                  </config>
                </table>
              </table>
            </table>
          </table>
        </table>
      </table>
    </table>
  </table>

```

```

    <state>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:MPLS</address-family>
        </state>
      </table>
    </tables>
  <interfaces>
    <interface>
      <id>eth0</id>
      <config>
        <id>eth0</id>
        <interface>eth0</interface>
      </config>
      <state>
        <id>eth0</id>
        <interface>eth0</interface>
      </state>
    </interface>
    <interface>
      <id>eth1</id>
      <config>
        <id>eth1</id>
        <interface>eth1</interface>
      </config>
      <state>
        <id>eth1</id>
        <interface>eth1</interface>
      </state>
    </interface>
    <interface>
      <id>eth2</id>
      <config>
        <id>eth2</id>
        <interface>eth2</interface>
      </config>
      <state>
        <id>eth2</id>
        <interface>eth2</interface>
      </state>
    </interface>
    <interface>
      <id>eth2.1001</id>
      <config>
        <id>eth2.1001</id>
        <interface>eth2</interface>
        <subinterface>1001</subinterface>
      </config>
      <state>
        <id>eth2.1001</id>
        <interface>eth2</interface>
        <subinterface>1001</subinterface>
      </state>
    </interface>
  </interfaces>

```

```
<interface>
  <id>eth3</id>
  <config>
    <id>eth3</id>
    <interface>eth3</interface>
  </config>
  <state>
    <id>eth3</id>
    <interface>eth3</interface>
  </state>
</interface>
<interface>
  <id>eth4</id>
  <config>
    <id>eth4</id>
    <interface>eth4</interface>
  </config>
  <state>
    <id>eth4</id>
    <interface>eth4</interface>
  </state>
</interface>
<interface>
  <id>eth5</id>
  <config>
    <id>eth5</id>
    <interface>eth5</interface>
  </config>
  <state>
    <id>eth5</id>
    <interface>eth5</interface>
  </state>
</interface>
<interface>
  <id>eth6</id>
  <config>
    <id>eth6</id>
    <interface>eth6</interface>
  </config>
  <state>
    <id>eth6</id>
    <interface>eth6</interface>
  </state>
</interface>
<interface>
  <id>eth7</id>
  <config>
    <id>eth7</id>
    <interface>eth7</interface>
  </config>
  <state>
    <id>eth7</id>
    <interface>eth7</interface>
  </state>
</interface>
<interface>
  <id>eth8</id>
```

```

    <config>
      <id>eth8</id>
      <interface>eth8</interface>
    </config>
  </state>
  <id>eth8</id>
  <interface>eth8</interface>
</state>
</interface>
<interface>
  <id>lo</id>
  <config>
    <id>lo</id>
    <interface>lo</interface>
  </config>
  <state>
    <id>lo</id>
    <interface>lo</interface>
  </state>
</interface>
</interfaces>
<mpls>
  <signaling-protocols>
    <ldp>
      <interface-attributes>
        <interfaces>
          <interface>
            <interface-id>eth4</interface-id>
            <config>
              <interface-id>eth4</interface-id>
            </config>
            <address-families>
              <address-family>
                <afi-name>IPV4</afi-name>
                <config>
                  <afi-name>IPV4</afi-name>
                  <enabled>true</enabled>
                </config>
              </address-family>
              <address-family>
                <afi-name>IPV6</afi-name>
                <config>
                  <afi-name>IPV6</afi-name>
                  <enabled>false</enabled>
                </config>
              </address-family>
            </address-families>
          </interface>
        </interfaces>
      </interface-attributes>
    </ldp>
  </signaling-protocols>
</global>
  <interface-attributes>
    <interface>
      <interface-id>eth4</interface-id>
      <config>

```



```

        <interface-id>eth4</interface-id>
        <mpls-enabled>true</mpls-enabled>
    </config>
    <interface-ref>
        <config>
            <interface>eth4</interface>
        </config>
    </interface-ref>
    <state>
        <mpls-enabled>true</mpls-enabled>
    </state>
</interface>
</interface-attributes>
</global>
</mpls>
</network-instance>
<network-instance>
    <name>vpls1001</name>
    <config>
        <name>vpls1001</name>
        <type
            xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
        <router-id>10.143.73.1</router-id>
        <route-distinguisher>10.143.73.1:1001</route-distinguisher>
    </config>
    <encapsulation>
        <config>
            <encapsulation-type
                xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:MPLS</encapsulation-type>
            </config>
            <state>
                <encapsulation-type
                    xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:MPLS</encapsulation-type>
                </state>
            </encapsulation>
        </state>
        <name>vpls1001</name>
        <type
            xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
        <router-id>10.143.73.1</router-id>
        <route-distinguisher>10.143.73.1:1001</route-distinguisher>
    </state>
    <inter-instance-policies>
        <import-export-policy>
            <config>
                <export-route-target>1001:1001</export-route-target>
                <import-route-target>1001:1001</import-route-target>
            </config>
            <state>
                <export-route-target>1001:1001</export-route-target>
                <import-route-target>1001:1001</import-route-target>
            </state>
        </import-export-policy>
    </inter-instance-policies>

```

```

</inter-instance-policies>
<connection-points>
  <connection-point>
    <connection-point-id>1001</connection-point-id>
    <config>
      <connection-point-id>1001</connection-point-id>
    </config>
    <endpoints>
      <endpoint>
        <endpoint-id>1001</endpoint-id>
        <config>
          <endpoint-id>1001</endpoint-id>
        </config>
        <state>
          <endpoint-id>1001</endpoint-id>
        </state>
        <local>
          <config>
            <interface>eth2</interface>
            <subinterface>1001</subinterface>
          </config>
          <state>
            <interface>eth2</interface>
            <subinterface>1001</subinterface>
          </state>
        </local>
        <remote/>
      </endpoint>
    </endpoints>
    <state>
      <connection-point-id>1001</connection-point-id>
    </state>
  </connection-point>
</connection-points>
<evpn>
  <evpn-instances>
    <evpn-instance>
      <evi>1001</evi>
      <config>
        <evi>1001</evi>
        <encapsulation-type
types">oc-ni-types:MPLS</encapsulation-type>
        </config>
        <state>
          <evi>1001</evi>
          <encapsulation-type
types">oc-ni-types:MPLS</encapsulation-type>
          </state>
        </evpn-instance>
      </evpn-instances>
    </evpn>
  </network-instance>
</network-instances>

```

Restrictions

- The paths mentioned below do not have a translation from OpenConfig model to OcNOS model. If you try to apply a configuration using only these paths, it will not be applied on OcNOS side.
/network-instances/network-instance/connection-points
/network-instances/network-instance/connection-points/connection-point/endpoints
Those containers are used only to handle "virtual-circuit-identifier" attribute and "local" container, and the configuration is translated only when those attributes are configured.
- /network-instances/network-instance/connection-points
The deletion of this attribute only deletes the configurations of "virtual-circuit-identifier" and "local" container. To delete all configuration from "evpn-mpls" container, the delete operation must be placed on the path:
/network-instances/network-instance/evpn/evpn-instances/evpn-instance[evi].

Configure EVPN-VPWS type

This XML configuration snippet is used to configure EVPN-VPWS type.

Release

This configuration was introduced in OcNOS version 6.1.0.

Initial Configuration:

Here is the initial configuration necessary to be implemented before configuring EVPN-VPWS type.

```
router ldp
!
interface lo
 ip address 10.143.73.1/32 secondary
!
interface eth4
 ip address 10.255.128.8/31
 label-switching
 enable-ldp ipv4
!
interface eth2.2 switchport
 encapsulation dot1q 2
!
ospf area-interface-config-mode
 router ospf 100
  ospf router-id 10.143.73.1
  area 0.0.0.0 interface eth4
  area 0.0.0.0 interface lo
```

OcNOS CLI Command

The below CLI command is used to configure EVPN-VPWS type.

```
evpn mpls enable
!
mac vrf vrf2
```

```

router-id 10.143.73.1
rd 10.143.73.1:2
route-target both 2:2
!
evpn mpls vtep-ip-global 10.143.73.1
!
evpn mpls id 2 xconnect target-mpls-id 252
host-reachability-protocol evpn-bgp vrf2
!
interface eth2.2 switchport
encapsulation dot1q 2
access-if-evpn
map vpn-id 2
!
router bgp 65010
neighbor 10.143.73.3 remote-as 65010
neighbor 10.143.73.3 update-source lo
!
address-family l2vpn evpn
neighbor 10.143.73.3 activate
exit-address-family

```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure EVPN-VPWS type.

```

<network-instances xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-network-
instance">
  <network-instance>
    <instance-name>default</instance-name>
    <instance-type>vrf</instance-type>
    <vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vrf">
      <config>
        <vrf-name>default</vrf-name>
      </config>
    </vrf>
    <config>
      <instance-name>default</instance-name>
      <instance-type>vrf</instance-type>
    </config>
  </network-instance>
  <network-instance>
    <instance-name>vrf2</instance-name>
    <instance-type>mac-vrf</instance-type>
    <config>
      <instance-name>vrf2</instance-name>
      <instance-type>mac-vrf</instance-type>
    </config>
    <vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-vrf">
      <config>
        <vrf-name>vrf2</vrf-name>
      </config>
    <bgp-vrf xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp-vrf">
      <config>
        <rd-string>10.143.73.1:2</rd-string>
      </config>
    </route-target>
  </network-instance>
</network-instances>

```

```

        <rt-rd-string>2:2</rt-rd-string>
        <config>
            <rt-rd-string>2:2</rt-rd-string>
            <direction>import export</direction>
        </config>
    </route-target>
</bgp-vrf>
</vrf>
</network-instance>
</network-instances>
<bgp xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-bgp">
    <bgp-instance>
        <bgp-as>65010</bgp-as>
        <config>
            <bgp-as>65010</bgp-as>
        </config>
        <peer>
            <peer-address>10.143.73.3</peer-address>
            <config>
                <peer-address>10.143.73.3</peer-address>
                <peer-as>65010</peer-as>
                <source-identifier>lo</source-identifier>
            </config>
            <address-family>
                <afi>l2vpn</afi>
                <safi>evpn</safi>
                <config>
                    <afi>l2vpn</afi>
                    <safi>evpn</safi>
                    <activate />
                </config>
            </address-family>
        </peer>
        <address-family>
            <afi>l2vpn</afi>
            <safi>evpn</safi>
            <config>
                <afi>l2vpn</afi>
                <safi>evpn</safi>
            </config>
        </address-family>
    </bgp-instance>
</bgp>
<evpn-mpls xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-evpn-mpls">
    <mpls-tenant>
        <tenant-identifier>2</tenant-identifier>
        <config>
            <vrf-name>vrf2</vrf-name>
            <tenant-identifier>2</tenant-identifier>
            <vpws-identifier>252</vpws-identifier>
        </config>
    </mpls-tenant>
</global>
<config>
    <enable-evpn-mpls />
    <vtep-ipv4>10.143.73.1</vtep-ipv4>
</config>

```

```

    </global>
  </evpn-mpls>
  <evpn xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-ethernet-vpn">
    <interfaces>
      <interface>
        <name>eth2.2</name>
        <config>
          <name>eth2.2</name>
        </config>
        <access-interfaces>
          <access-interface>
            <access-if>access-if-evpn</access-if>
            <config>
              <access-if>access-if-evpn</access-if>
              <evpn-identifier>2</evpn-identifier>
            </config>
          </access-interface>
        </access-interfaces>
      </interface>
    </interfaces>
  </evpn>
  <interfaces xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-interface">
    <interface>
      <name>eth2.2</name>
      <config>
        <enable-switchport />
      </config>
    </interface>
  </interfaces>NetConf

```

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure EVPN-VPWS type.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
  <network-instance>
    <name>default</name>
    <config>
      <name>default</name>
      <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
      </config>
      <protocols>
        <protocol>
          <identifier
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</identifier>
          <name>DIRECTLY_CONNECTED</name>
          <config>
            <identifier
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
            <name>DIRECTLY_CONNECTED</name>
            <enabled>true</enabled>
          </config>

```

```

    </protocol>
  <protocol>
    <identifier
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:OSPF</identifier>
    <name>100</name>
    <ospfv2>
      <global>
        <config>
          <router-id>10.143.73.1</router-id>
          <log-adjacency-changes>>false</log-adjacency-changes>
        </config>
      </global>
      <areas>
        <area>
          <identifier>0.0.0.0</identifier>
          <config>
            <identifier>0.0.0.0</identifier>
            </config>
            <interfaces>
              <interface>
                <id>eth4</id>
                <config>
                  <id>eth4</id>
                </config>
                <interface-ref>
                  <config>
                    <interface>eth4</interface>
                  </config>
                </interface-ref>
              </interface>
              <interface>
                <id>lo</id>
                <config>
                  <id>lo</id>
                </config>
                <interface-ref>
                  <config>
                    <interface>lo</interface>
                  </config>
                </interface-ref>
              </interface>
            </interfaces>
          </area>
        </areas>
      </ospfv2>
    <config>
      <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:OSPF</identifier>
      <name>100</name>
      <enabled>true</enabled>
    </config>
  </protocol>
</protocol>
<identifier

```

```

        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
        <name>65010</name>
        <bgp>
        <global>
        <config>
        <as>65010</as>
        </config>
        <afi-safis>
        <afi-safi>
        <afi-safi-name
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
        <config>
        <afi-safi-name
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
        <enabled>true</enabled>
        </config>
        </afi-safi>
        </afi-safis>
        </global>
        <neighbors>
        <neighbor>
        <neighbor-address>10.143.73.3</neighbor-address>
        <afi-safis>
        <afi-safi>
        <afi-safi-name
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
        <config>
        <afi-safi-name
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
        <enabled>true</enabled>
        </config>
        </afi-safi>
        </afi-safis>
        <config>
        <enabled>true</enabled>
        <neighbor-address>10.143.73.3</neighbor-address>
        <peer-as>65010</peer-as>
        </config>
        <transport>
        <config>
        <local-address>lo</local-address>
        </config>
        </transport>
        </neighbor>
        </neighbors>
        </bgp>
        <config>
        <identifier
types">oc-pol-types:BGP</identifier>
        <name>65010</name>
        <enabled>true</enabled>
        </config>

```



```

    </protocol>
  </protocols>
  <tables>
    <table>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
          <config>
            <protocol
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
              <address-family
                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
              </config>
            </table>
          <table>
            <protocol
              xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
              <address-family
                xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
              <config>
                <protocol
                  xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                  <address-family
                    xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
                  </config>
                </table>
              <table>
                <protocol
                  xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:STATIC</protocol>
                  <address-family
                    xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                  <config>
                    <protocol
                      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:STATIC</protocol>
                      <address-family
                        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                      </config>
                    </table>
                  <table>
                    <protocol
                      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:STATIC</protocol>
                      <address-family
                        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
                      <config>

```

```

        <protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:STATIC</protocol>
        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        </config>
      </table>
    </table>
    <protocol
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:OSPF</protocol>
    <address-family
      xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
    <config>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:OSPF</protocol>
      <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
      </config>
    </table>
  </table>
  <protocol
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>
  <address-family
    xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
  <config>
    <protocol
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
    <address-family
      xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
    </config>
  </table>
</table>
<protocol
  xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>
<address-family
  xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
<config>
  <protocol
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
  <address-family
    xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
  </config>
</table>
</table>
<protocol
  xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:OSPF</protocol>
<address-family
  xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
<config>
  <protocol
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:OSPF</protocol>
  <address-family
    xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
  </config>
</table>
</table>

```

```

        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:MPLS</address-family>
        <config>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:MPLS</address-family>
        </config>
        </table>
        </tables>
    </network-instance>
    <network-instance>
        <name>vrf2</name>
        <config>
        <name>vrf2</name>
        <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
        <router-id>10.143.73.1</router-id>
        <route-distinguisher>10.143.73.1:2</route-distinguisher>
        </config>
        <encapsulation>
        <config>
        <encapsulation-type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:MPLS</encapsulation-type>
        </config>
        </encapsulation>
        <inter-instance-policies>
        <import-export-policy>
        <config>
        <export-route-target>2:2</export-route-target>
        <import-route-target>2:2</import-route-target>
        </config>
        </import-export-policy>
        </inter-instance-policies>
        <connection-points>
        <connection-point>
        <connection-point-id>2</connection-point-id>
        <config>
        <connection-point-id>2</connection-point-id>
        </config>
        <endpoints>
        <endpoint>
        <endpoint-id>2</endpoint-id>
        <config>
        <endpoint-id>2</endpoint-id>
        </config>
        <local>
        <config>
        <interface>eth2</interface>
        <subinterface>2</subinterface>
        </config>

```

```

        </local>
        <remote>
            <config>
                <virtual-circuit-identifier>252</virtual-circuit-identifier>
            </config>
        </remote>
    </endpoint>
</endpoints>
</connection-point>
</connection-points>
<evpn>
    <evpn-instances>
        <evpn-instance>
            <evi>2</evi>
            <config>
                <evi>2</evi>
                <encapsulation-type
                    xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:MPLS</encapsulation-type>
            </config>
        </evpn-instance>
    </evpn-instances>
</evpn>
</network-instance>
</network-instances>

```

Validation with NetConf get

Here is a NetConf validation response that provides detailed information about configuring EVPN-VPWS type.

```

<network-instances xmlns="http://openconfig.net/yang/network-instance">
    <network-instance>
        <name>default</name>
        <config>
            <name>default</name>
            <type
                xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
            </config>
            <state>
                <name>default</name>
                <type
                    xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:DEFAULT_INSTANCE</type>
                </state>
            <protocols>
                <protocol>
                    <identifier
                        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</identifier>
                    <name>DIRECTLY_CONNECTED</name>
                    <config>
                        <identifier
                            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
                        <name>DIRECTLY_CONNECTED</name>
                        <enabled>true</enabled>
                    </config>
                </protocol>
            </protocols>
        </config>
    </network-instance>
</network-instances>

```

```

    </config>
    <state>
      <identifier
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</identifier>
      <name>DIRECTLY_CONNECTED</name>
      <enabled>true</enabled>
    </state>
  </protocol>
  <protocol>
    <identifier
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:OSPF</identifier>
    <name>100</name>
    <ospfv2>
      <global>
        <config>
          <router-id>10.143.73.1</router-id>
          <log-adjacency-changes>>false</log-adjacency-changes>
        </config>
        <state>
          <log-adjacency-changes>>false</log-adjacency-changes>
          <router-id>10.143.73.1</router-id>
        </state>
      </global>
      <areas>
        <area>
          <identifier>0.0.0.0</identifier>
          <config>
            <identifier>0.0.0.0</identifier>
          </config>
          <state>
            <identifier>0.0.0.0</identifier>
          </state>
          <interfaces>
            <interface>
              <id>eth4</id>
              <config>
                <id>eth4</id>
              </config>
              <interface-ref>
                <config>
                  <interface>eth4</interface>
                </config>
              </interface-ref>
              <state>
                <id>eth4</id>
              </state>
            </interface>
            <interface>
              <id>lo</id>
              <config>
                <id>lo</id>
              </config>
              <interface-ref>
                <config>
                  <interface>lo</interface>

```

```

        </config>
      </interface-ref>
      <state>
        <id>lo</id>
      </state>
    </interface>
  </interfaces>
</area>
</areas>
</ospfv2>
<config>
  <identifier
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:OSPF</identifier>
    <name>100</name>
    <enabled>true</enabled>
  </config>
</protocol>
<protocol>
  <identifier
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</identifier>
    <name>65010</name>
    <bgp>
      <global>
        <config>
          <as>65010</as>
        </config>
        <state>
          <as>65010</as>
          <total-prefixes>0</total-prefixes>
        </state>
        <afi-safis>
          <afi-safi>
            <afi-safi-name
              xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
              <config>
                <afi-safi-name
                  xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
                  <enabled>true</enabled>
                </config>
                <add-paths>
                  <state>
                    <receive>false</receive>
                    <send>false</send>
                  </state>
                </add-paths>
                <state>
                  <afi-safi-name
                    xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
                    <enabled>true</enabled>
                  </state>
                </afi-safi>
              </afi-safis>
            </global>

```

```

    <neighbors>
      <neighbor>
        <neighbor-address>10.143.73.3</neighbor-address>
        <afi-safis>
          <afi-safi>
            <afi-safi-name
              xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
            <config>
              <afi-safi-name
                xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
              <enabled>true</enabled>
            </config>
            <state>
              <afi-safi-name
                xmlns:oc-bgp-types="http://openconfig.net/yang/bgp-
types">oc-bgp-types:L2VPN_EVPN</afi-safi-name>
              <enabled>true</enabled>
            </state>
          </afi-safi>
        </afi-safis>
        <config>
          <enabled>true</enabled>
          <neighbor-address>10.143.73.3</neighbor-address>
          <peer-as>65010</peer-as>
        </config>
        <transport>
          <config>
            <local-address>lo</local-address>
          </config>
          <state>
            <local-address>lo</local-address>
          </state>
        </transport>
        <state>
          <enabled>true</enabled>
          <neighbor-address>10.143.73.3</neighbor-address>
          <peer-as>65010</peer-as>
        </state>
      </neighbor>
    </neighbors>
  </bgp>
</config>
  <identifier
    xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
    <name>65010</name>
    <enabled>true</enabled>
  </config>
  <state>
    <enabled>true</enabled>
    <identifier
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</identifier>
      <name>65010</name>
    </state>
</protocol>

```

```

    </protocols>
    <tables>
      <table>
        <protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
          <address-family
            xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
            <config>
              <protocol
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                <address-family
                  xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                </config>
              <state>
                <protocol
                  xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                  <address-family
                    xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
                  </state>
                </protocol>
              </state>
            </config>
          </address-family>
        </protocol>
      </table>
      <table>
        <protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:DIRECTLY_CONNECTED</protocol>
          <address-family
            xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
            <config>
              <protocol
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                <address-family
                  xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
                </config>
              <state>
                <protocol
                  xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:DIRECTLY_CONNECTED</protocol>
                  <address-family
                    xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
                  </state>
                </protocol>
              </state>
            </config>
          </address-family>
        </protocol>
      </table>
      <table>
        <protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:STATIC</protocol>
          <address-family
            xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
            <config>
              <protocol
                xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-

```



```

        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:STATIC</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        </config>
        </table>
        <table>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:STATIC</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        <config>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:STATIC</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        </config>
        </table>
        <table>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:OSPF</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        <config>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:OSPF</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        </config>
        </table>
        <table>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        <config>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
        <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv4</address-family>
        </config>
        </table>
        <table>
        <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>

```

```

    <address-family
      xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
    <config>
      <protocol
        xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
        <address-family
          xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:IPv6</address-family>
        </config>
      </table>
    </table>
    <protocol
      xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-pol-
types:BGP</protocol>
      <address-family
        xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:MPLS</address-family>
      <config>
        <protocol
          xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
          <address-family
            xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:MPLS</address-family>
          </config>
        <state>
          <protocol
            xmlns:oc-pol-types="http://openconfig.net/yang/policy-types">oc-
pol-types:BGP</protocol>
            <address-family
              xmlns:oc-types="http://openconfig.net/yang/openconfig-types">oc-
types:MPLS</address-family>
            </state>
          </table>
        </tables>
      </interfaces>
      <interface>
        <id>eth0</id>
        <config>
          <id>eth0</id>
          <interface>eth0</interface>
        </config>
      </interface>
      <interface>
        <id>eth1</id>
        <config>
          <id>eth1</id>
          <interface>eth1</interface>
        </config>
      </interface>
      <interface>
        <id>eth2</id>
        <config>
          <id>eth2</id>
          <interface>eth2</interface>
        </config>

```

```
</interface>
<interface>
  <id>eth2.2</id>
  <config>
    <id>eth2.2</id>
    <interface>eth2</interface>
    <subinterface>2</subinterface>
  </config>
</interface>
<interface>
  <id>eth3</id>
  <config>
    <id>eth3</id>
    <interface>eth3</interface>
  </config>
</interface>
<interface>
  <id>eth4</id>
  <config>
    <id>eth4</id>
    <interface>eth4</interface>
  </config>
</interface>
<interface>
  <id>eth5</id>
  <config>
    <id>eth5</id>
    <interface>eth5</interface>
  </config>
</interface>
<interface>
  <id>eth6</id>
  <config>
    <id>eth6</id>
    <interface>eth6</interface>
  </config>
</interface>
<interface>
  <id>eth7</id>
  <config>
    <id>eth7</id>
    <interface>eth7</interface>
  </config>
</interface>
<interface>
  <id>eth8</id>
  <config>
    <id>eth8</id>
    <interface>eth8</interface>
  </config>
</interface>
<interface>
  <id>lo</id>
  <config>
    <id>lo</id>
    <interface>lo</interface>
  </config>
```

```

    </interface>
  </interfaces>
</mpls>
  <signaling-protocols>
    <ldp>
      <interface-attributes>
        <interfaces>
          <interface>
            <interface-id>eth4</interface-id>
            <config>
              <interface-id>eth4</interface-id>
            </config>
            <address-families>
              <address-family>
                <afi-name>IPv4</afi-name>
                <config>
                  <afi-name>IPv4</afi-name>
                  <enabled>true</enabled>
                </config>
              </address-family>
              <address-family>
                <afi-name>IPv6</afi-name>
                <config>
                  <afi-name>IPv6</afi-name>
                  <enabled>false</enabled>
                </config>
              </address-family>
            </address-families>
          </interface>
        </interfaces>
      </interface-attributes>
    </ldp>
  </signaling-protocols>
</global>
  <interface-attributes>
    <interface>
      <interface-id>eth4</interface-id>
      <config>
        <interface-id>eth4</interface-id>
        <mpls-enabled>true</mpls-enabled>
      </config>
      <interface-ref>
        <config>
          <interface>eth4</interface>
        </config>
      </interface-ref>
      <state>
        <mpls-enabled>true</mpls-enabled>
      </state>
    </interface>
  </interface-attributes>
</global>
</mpls>
</network-instance>
<network-instance>
  <name>vrf2</name>
  <config>

```

```

    <name>vrf2</name>
    <type
      xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
      <router-id>10.143.73.1</router-id>
      <route-distinguisher>10.143.73.1:2</route-distinguisher>
    </config>
    <encapsulation>
      <config>
        <encapsulation-type
          xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:MPLS</encapsulation-type>
        </config>
      <state>
        <encapsulation-type
          xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:MPLS</encapsulation-type>
        </state>
      </encapsulation>
    <state>
      <name>vrf2</name>
      <type
        xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:L2L3</type>
      <router-id>10.143.73.1</router-id>
      <route-distinguisher>10.143.73.1:2</route-distinguisher>
    </state>
    <inter-instance-policies>
      <import-export-policy>
        <config>
          <export-route-target>2:2</export-route-target>
          <import-route-target>2:2</import-route-target>
        </config>
        <state>
          <export-route-target>2:2</export-route-target>
          <import-route-target>2:2</import-route-target>
        </state>
      </import-export-policy>
    </inter-instance-policies>
    <connection-points>
      <connection-point>
        <connection-point-id>2</connection-point-id>
        <config>
          <connection-point-id>2</connection-point-id>
        </config>
        <endpoints>
          <endpoint>
            <endpoint-id>2</endpoint-id>
            <config>
              <endpoint-id>2</endpoint-id>
            </config>
            <state>
              <endpoint-id>2</endpoint-id>
            </state>
            <local>
              <config>
                <interface>eth2</interface>

```

```

        <subinterface>2</subinterface>
    </config>
    <state>
        <interface>eth2</interface>
        <subinterface>2</subinterface>
    </state>
</local>
<remote>
    <config>
        <virtual-circuit-identifier>252</virtual-circuit-identifier>
    </config>
    <state>
        <virtual-circuit-identifier>252</virtual-circuit-identifier>
    </state>
</remote>
</endpoint>
</endpoints>
<state>
    <connection-point-id>2</connection-point-id>
</state>
</connection-point>
</connection-points>
<evpn>
    <evpn-instances>
        <evpn-instance>
            <evi>2</evi>
            <config>
                <evi>2</evi>
                <encapsulation-type
xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:MPLS</encapsulation-type>
            </config>
            <state>
                <evi>2</evi>
                <encapsulation-type
xmlns:oc-ni-types="http://openconfig.net/yang/network-instance-
types">oc-ni-types:MPLS</encapsulation-type>
            </state>
        </evpn-instance>
    </evpn-instances>
</evpn>
</network-instance>
</network-instances>

```

Restrictions

- Since there is no equivalent in OpenConfig, and there is no obligation to have the configuration set in any case for the leaf `/evpn-mpls/global/config/vtep-ipv4` this leaf (`vtep-ipv4`) is no longer supported in the translation. If you want to set the configuration, you must use the **OcNOS namespace**.
- The paths mentioned below do not have a translation from OpenConfig model to OcNOS model. If you try to apply a configuration using only these paths, it will not be applied on OcNOS side.
 - `/network-instances/network-instance/connection-points`
 - `/network-instances/network-instance/connection-points/connection-point/endpoints`
Those containers are used only to handle **virtual-circuit-identifier** attribute and **local** container, and the configuration is translated only when those attributes are configured.

- /network-instances/network-instance/connection-point

The deletion of this attribute only deletes the configurations of **virtual-circuit-identifier** and **local** container. To delete all configuration from **evpn-mpls** container, the delete operation must be placed on the path:

/network-instances/network-instance/evpn/evpn-instances/evpn-instance

OpenZR+ OpenConfig Translation

General Restrictions

Operation create

NETCONF's `operation="create"` only supports *objectlist* elements, for example: `components/component[name]` or `/terminal-device/logical-channels/channel[index]`. Payloads with this operation on other elements have undefined behavior.

Operation merge and create

- It is not possible to create or merge a single instance of an OpenConfig component for OpenZR+ (module or optical channel) without some other valid configuration as OcNOS does not accept it.
- The creation or merging of the OpenConfig logical-channel instance for OpenZR+ must also be accompanied by the configuration of loopback-mode.

Laser frequency configuration in OpenZR+ media channel

- It is not possible to separately configure the grid, channel and fine-tune-frequency for laser configuration in a media channel for OpenZR+ in OpenConfig. The configuration of only the total frequency value is possible.
- In this way the central frequency is fixed at 193.1 THz and the grid is fixed at 100 GHz. With these values it is possible to calculate the channel and fine-tune-frequency for OcNOS.

Disable/enable OpenZR+ transceiver

This XML configuration snippet is used to disable/enable OpenZR+ transceiver.

Release

This configuration was introduced in OcNOS version 6.5.1.

Disable configuration

Here are the configuration details to disable OpenZR+ transceiver.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to disable OpenZR+ transceiver.

```
<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
```



```
<name>CMIS-MODULE-50</name><config>
  <name>CMIS-MODULE-50</name>
</config>
<transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
  <config>
    <enabled>false</enabled>
  </config>
</transceiver>
</component>
</components>
</config>
```

OcNOS CLI Command

The below CLI command is used to disable OpenZR+ transceiver.

```
qsfp-dd 50
service-disable
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to disable OpenZR+ transceiver.

```
<qsfp-dds xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <qsfp-dd>
    <fp-port>50</fp-port>
    <config>
      <fp-port>50</fp-port>
      <service-disable />
    </config>
  </qsfp-dd>
</qsfp-dds>
```

Enable configuration

Here are the configuration steps to enable OpenZR+ transceiver.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to enable OpenZR+ transceiver.

```
<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>CMIS-MODULE-50</name><config>
        <name>CMIS-MODULE-50</name>
      </config>
      <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
        <config>
          <enabled>true</enabled>
        </config>
      </transceiver>
    </component>
  </components>
</config>
```

OcNOS CLI Command

The below CLI command is used to enable OpenZR+ transceiver.

```
qsfp-dd 50
no service-disable
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to enable OpenZR+ transceiver.

```
<qsfp-dds xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <qsfp-dd>
    <fp-port>50</fp-port>
    <config>
      <fp-port>50</fp-port>
      <service-disable operation="delete" />
    </config>
  </qsfp-dd>
</qsfp-dds>
```

Configure OpenZR+ optical channel operational mode

This XML configuration snippet is used to configure OpenZR+ optical channel operational mode.

Release

This configuration was introduced in OcNOS version 6.5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure OpenZR+ optical channel operational mode.

```
<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>OCH-0/50</name>
      <config>
        <name>OCH-0/50</name>
      </config>
      <optical-channel>
        <config>
          <operational-mode>10</operational-mode>
        </config>
      </optical-channel>
    </component>
  </components>
</config>
```

OcNOS CLI Command

The below CLI is used to configure OpenZR+ optical channel operational mode.

```
qsfp-dd 50
  application 10
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure OpenZR+ optical channel operational mode.

```
<qsfp-dds xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <qsfp-dd>
    <fp-port>50</fp-port>
    <config>
      <fp-port>50</fp-port>
      <application>10</application>
    </config>
  </qsfp-dd>
</qsfp-dds>
```

Unconfiguration

Here are the commands to unconfigure OpenZR+ channel operational mode.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to unconfigure OpenZR+ optical channel operational mode.

```
<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>OCH-0/50</name>
      <optical-channel>
        <config>
          <operational-mode operation="delete" />
        </config>
      </optical-channel>
    </component>
  </components>
</config>
```

OcNOS CLI Command

The below CLI is used to unconfigure OpenZR+ optical channel operational mode.

```
qsfp-dd 50
  no application
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to unconfigure OpenZR+ optical channel operational mode.

```
<qsfp-dds xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <qsfp-dd>
    <fp-port>50</fp-port>
    <config>
      <application operation="delete" />
    </config>
  </qsfp-dd>
</qsfp-dds>
```

```
</qsfp-dd>
</qsfp-dds>
```

Configure OpenZR+ optical channel target output power

This XML configuration snippet is used to configure OpenZR+ optical channel target output power.

Release

This configuration was introduced in OcNOS version 6.5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure OpenZR+ optical channel target output power.

```
<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>OCH-0/50</name>
      <config>
        <name>OCH-0/50</name>
      </config>
      <optical-channel>
        <config>
          <target-output-power>1.00</target-output-power>
        </config>
      </optical-channel>
    </component>
  </components>
</config>
```

OcNOS CLI Command

The below CLI command is used to configure OpenZR+ optical channel target output power.

```
qsfp-dd 50
media-lane 1
laser output-power 1.00
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure OpenZR+ optical channel target output power.

```
<qsfp-dds xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <qsfp-dd>
    <fp-port>50</fp-port>
    <config>
      <fp-port>50</fp-port>
    </config>
    <media>
      <lanes>
        <lane>
          <lane-number>1</lane-number>
        </lane>
      </lanes>
    </media>
  </qsfp-dd>
</qsfp-dds>
```

```
        <laser>
          <config>
            <output-power>1.00</output-power>
          </config>
        </laser>
      </lane>
    </lanes>
  </media>
</qsfp-dd>
</qsfp-dds>
```

Unconfiguration

Here are the commands to unconfigure OpenZR+ channel target output power.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to unconfigure OpenZR+ optical channel target output power.

```
<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>OCH-0/50</name>
      <optical-channel>
        <config>
          <target-output-power operation="delete" />
        </config>
      </optical-channel>
    </component>
  </components>
</config>
```

OcNOS CLI Command

The below CLI command is used to unconfigure OpenZR+ optical channel target output power.

```
qsfp-dd 50
media-lane 1
no laser output-power
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to unconfigure OpenZR+ optical channel target output power.

```
<qsfp-dds xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <qsfp-dd>
    <fp-port>50</fp-port>
    <media>
      <lanes>
        <lane>
          <lane-number>1</lane-number>
          <laser>
            <config>
              <output-power operation="delete" />
            </config>
          </laser>
        </lane>
      </lanes>
    </media>
  </qsfp-dd>
</qsfp-dds>
```

```
        </laser>
      </lane>
    </lanes>
  </media>
</qsfp-dd>
</qsfp-dds>
```

Configure OpenZR+ optical channel frequency

This XML configuration snippet is used to configure OpenZR+ optical channel frequency.

Release

This configuration was introduced in OcNOS version 6.5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure OpenZR+ optical channel frequency.

```
<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>OCH-0/50</name>
      <config>
        <name>OCH-0/50</name>
      </config>
      <optical-channel>
        <config>
          <frequency>191300005</frequency>
        </config>
      </optical-channel>
    </component>
  </components>
</config>
```

OcNOS CLI Command

The below CLI command is used to configure OpenZR+ optical channel frequency.

```
qsfp-dd 50
 media-lane 1
  laser grid 100
  laser channel -18
  laser fine-tune-freq 0.005
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure OpenZR+ optical channel frequency.

```
<qsfp-dds xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <qsfp-dd>
    <fp-port>50</fp-port>
  </qsfp-dd>
</qsfp-dds>
```

```
<fp-port>50</fp-port>
</config>
<media>
  <lanes>
    <lane>
      <lane-number>1</lane-number>
      <laser>
        <config>
          <channel>-18</channel>
          <grid>100</grid>
          <fine-tune-freq>0.005</fine-tune-freq>
        </config>
      </laser>
    </lane>
  </lanes>
</media>
</qsfp-dd>
</qsfp-dds>
```

Unconfiguration

Here are the commands to unconfigure OpenZR+ optical channel frequency.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to unconfigure OpenZR+ optical channel frequency.

```
<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>OCH-0/50</name>
      <optical-channel>
        <config>
          <frequency operation="delete" />
        </config>
      </optical-channel>
    </component>
  </components>
</config>
```

OcNOS CLI Command

The below CLI command is used to unconfigure OpenZR+ optical channel frequency.

```
qsfp-dd 50
media-lane 1
no laser grid
no laser channel
no laser fine-tune-freq
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to unconfigure OpenZR+ optical channel frequency.

```
<qsfp-dds xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
```

```
<qsfp-dd>
  <fp-port>50</fp-port>
  <media>
    <lanes>
      <lane>
        <lane-number>1</lane-number>
        <laser>
          <config>
            <channel operation="delete" />
            <grid operation="delete" />
            <fine-tune-freq operation="delete" />
          </config>
        </laser>
      </lane>
    </lanes>
  </media>
</qsfp-dd>
</qsfp-dds>
```

Configure OpenZR+ loopback mode

This XML configuration snippet is used to configure OpenZR+ loopback mode.

Release

This configuration was introduced in OcNOS version 6.5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure OpenZR+ loopback mode.

```
<config>
  <terminal-device xmlns="http://openconfig.net/yang/terminal-device">
    <logical-channels>
      <channel>
        <index>838861056</index>
        <config>
          <index>838861056</index>
          <loopback-mode>TERMINAL</loopback-mode>
        </config>
      </channel>
    </logical-channels>
  </terminal-device>
</config>
```

OcNOS CLI Command

The below CLI command is used to configure OpenZR+ loopback mode.

```
qsfp-dd 50
  loopback in media
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure OpenZR+ loopback mode.

```
<qsfp-dds xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <qsfp-dd>
    <fp-port>50</fp-port>
    <config>
      <fp-port>50</fp-port>
    </config>
    <media>
      <loopback>
        <config>
          <type>in</type>
        </config>
      </loopback>
    </media>
  </qsfp-dd>
</qsfp-dds>
```

Unconfiguration

Here are the commands to unconfigure OpenZR+ loopback mode.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to unconfigure OpenZR+ loopback mode.

```
<config>
  <terminal-device xmlns="http://openconfig.net/yang/terminal-device">
    <logical-channels>
      <channel>
        <index>838861056</index>
        <config>
          <loopback-mode operation="delete" />
        </config>
      </channel>
    </logical-channels>
  </terminal-device>
</config>
```

OcNOS CLI Command

The below CLI command is used to unconfigure OpenZR+ loopback mode.

```
qsfp-dd 50
no loopback media
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to unconfigure OpenZR+ loopback mode.

```
<qsfp-dds xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-platform">
  <qsfp-dd>
    <fp-port>50</fp-port>
```

```

    <media>
      <loopback>
        <config>
          <type operation="delete" />
        </config>
      </loopback>
    </media>
  </qsfp-dd>
</qsfp-dds>

```

Validate OpenZR+ module state

Use these commands to validate OpenZR+ module state.

Release

This configuration was introduced in OcNOS version 6.5.1.

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```

<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>CMIS-MODULE-50</name>
      <state />
    </component>
  </components>
</config>

```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for validating OpenZR+ module state.

```

<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>CMIS-MODULE-50</name>
    <state>
      <id>CMIS-MODULE-50</id>
      <name>CMIS-MODULE-50</name>
      <type>oc-platform-types:TRANSCEIVER</type>
      <location>50</location>
      <mfg-name>SmartOptics</mfg-name>
      <mfg-date>2022-03-18</mfg-date>
      <description>CMIS Transceiver</description>
      <hardware-version>49.48</hardware-version>
      <firmware-version>61.20</firmware-version>
      <software-version>NA</software-version>
      <serial-no>214156344</serial-no>
      <part-no>SO-TQSFPDD4CCZRP</part-no>
      <removable>true</removable>
      <oper-status>

```

```

      xmlns:oc-platform-types="http://openconfig.net/yang/platform-
types">oc-platform-types:INACTIVE</oper-status>
      <parent>PORT-QSFP-50</parent>
      <empty>>false</empty>
      <allocated-power>0</allocated-power>
      <temperature>
        <instant>0.0</instant>
      </temperature>
    </state>
  </component>
</components>

```

Validate OpenZR+ transceiver state

Use these commands to validate OpenZR+ transceiver state.

Release

This configuration was introduced in OcNOS version 6.5.1.

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```

<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>CMIS-MODULE-50</name>
      <transceiver>
        <state />
      </transceiver>
    </component>
  </components>
</config>

```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for validating OpenZR+ transceiver state.

```

<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>CMIS-MODULE-50</name>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <state>
        <form-factor
          xmlns:oc-opt-types="http://openconfig.net/yang/transport-types">oc-
opt-types:QSFP56_DD_TYPE1</form-factor>
        <connector-type
          xmlns:oc-opt-types="http://openconfig.net/yang/transport-types">oc-
opt-types:LC_CONNECTOR</connector-type>
        <vendor>SmartOptics</vendor>
        <vendor-part>SO-TQSFPDD4CCZRP</vendor-part>
        <vendor-rev>A</vendor-rev>

```

```
<serial-no>214156344</serial-no>
<date-code>220318</date-code>
<supply-voltage>
  <instant>3.32</instant>
</supply-voltage>
</state>
</transceiver>
</component>
</components>
```

Validate OpenZR+ transceiver thresholds

Use these commands to validate OpenZR+ transceiver thresholds.

Release

This configuration was introduced in OcNOS version 6.5.1.

Severity CRITICAL

The below commands are used to validate the thresholds with critical severity.

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```
<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>CMIS-MODULE-50</name>
      <transceiver>
        <thresholds>
          <threshold>
            <severity>CRITICAL</severity>
          </threshold>
        </thresholds>
      </transceiver>
    </component>
  </components>
</config>
```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for validating OpenZR+ transceiver thresholds.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-types">
    <name>CMIS-MODULE-50</name>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <thresholds>
        <threshold>
          <severity>CRITICAL</severity>
        </threshold>
      </thresholds>
    </transceiver>
  </component>
</components>
```

```

    <state>
      <severity>CRITICAL</severity>
      <input-power-upper>101.000000</input-power-upper>
      <input-power-lower>8.000000</input-power-lower>
    </state>
  </threshold>
</thresholds>
</transceiver>
</component>
</components>

```

Severity MAJOR

The below commands are used to validate thresholds with major severity.

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```

<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>CMIS-MODULE-50</name>
      <transceiver>
        <thresholds>
          <threshold>
            <severity>MAJOR</severity>
          </threshold>
        </thresholds>
      </transceiver>
    </component>
  </components>
</config>

```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for validating the OpenZR+ transceiver thresholds with major severity.

```

<components xmlns="http://openconfig.net/yang/platform">
  <component xmlns:oc-opt-types="http://openconfig.net/yang/transport-types">
    <name>CMIS-MODULE-50</name>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <thresholds>
        <threshold>
          <severity>MAJOR</severity>
          <state>
            <severity>MAJOR</severity>
            <input-power-upper>96.000000</input-power-upper>
            <input-power-lower>9.000000</input-power-lower>
          </state>
        </threshold>
      </thresholds>
    </transceiver>
  </component>

```

```
</components>
```

Validate OpenZR+ transceiver physical channels

Use these commands to validate OpenZR+ transceiver physical channels.

Release

This configuration was introduced in OcNOS version 6.5.1.

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```
<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>CMIS-MODULE-50</name>
      <transceiver>
        <physical-channels />
      </transceiver>
    </component>
  </components>
</config>
```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for validating OpenZR+ transceiver channels.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>CMIS-MODULE-50</name>
    <transceiver xmlns="http://openconfig.net/yang/platform/transceiver">
      <physical-channels>
        <channel>
          <index>1</index>
          <state>
            <laser-temperature>
              <instant>0.0</instant>
            </laser-temperature>
            <index>1</index>
            <laser-age>0</laser-age>
          </state>
        </channel>
      </physical-channels>
    </transceiver>
  </component>
</components>
```

Validate OpenZR+ transceiver optical channel state

Use these commands to validate OpenZR+ transceiver optical channel state.

Release

This configuration was introduced in OcNOS version 6.5.1.

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```
<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>OCH-0/50</name>
      <optical-channel>
        <state />
      </optical-channel>
    </component>
  </components>
</config>
```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for validating OpenZR+ transceiver optical channel state.

```
<components xmlns="http://openconfig.net/yang/platform">
  <component>
    <name>OCH-0/50</name>
    <optical-channel>
      <state>
        <input-power>
          <instant>100.00</instant>
        </input-power>
        <output-power>
          <instant>100.00</instant>
        </output-power>
        <laser-bias-current>
          <instant>0.00</instant>
        </laser-bias-current>
        <pre-fec-ber>
          <min>0.00</min>
          <max>0.00</max>
          <avg>0.00</avg>
          <instant>0.00</instant>
        </pre-fec-ber>
        <post-fec-ber>
          <min>0.00</min>
          <max>0.00</max>
          <avg>0.00</avg>
          <instant>0.00</instant>
        </post-fec-ber>
      </state>
    </optical-channel>
  </component>
</components>
```

```
</post-fec-ber>
<modulator-bias-xi>
  <instant>0.00</instant>
</modulator-bias-xi>
<modulator-bias-xq>
  <instant>0.00</instant>
</modulator-bias-xq>
<modulator-bias-yi>
  <instant>0.00</instant>
</modulator-bias-yi>
<modulator-bias-yq>
  <instant>0.00</instant>
</modulator-bias-yq>
<modulator-bias-x-phase>
  <instant>0.00</instant>
</modulator-bias-x-phase>
<modulator-bias-y-phase>
  <instant>0.00</instant>
</modulator-bias-y-phase>
<chromatic-dispersion>
  <max>0.00</max>
  <min>0.00</min>
</chromatic-dispersion>
<polarization-mode-dispersion>
  <instant>0.00</instant>
  <avg>0.00</avg>
  <min>0.00</min>
  <max>0.00</max>
</polarization-mode-dispersion>
<second-order-polarization-mode-dispersion>
  <instant>0.00</instant>
</second-order-polarization-mode-dispersion>
<polarization-dependent-loss>
  <instant>0.00</instant>
  <avg>0.00</avg>
  <min>0.00</min>
  <max>0.00</max>
</polarization-dependent-loss>
<osnr>
  <instant>0.00</instant>
  <avg>0.00</avg>
  <min>0.00</min>
  <max>0.00</max>
</osnr>
<esnr>
  <instant>0.00</instant>
  <avg>0.00</avg>
  <min>0.00</min>
  <max>0.00</max>
</esnr>
<carrier-frequency-offset>
  <instant>0.00</instant>
  <avg>0.00</avg>
  <min>0.00</min>
  <max>0.00</max>
</carrier-frequency-offset>
<sop-roc>
```



```

    <instant>0.00</instant>
    <avg>0.00</avg>
    <min>0.00</min>
    <max>0.00</max>
  </sop-roc>
  <fec-uncorrectable-blocks>
    <instant>0</instant>
  </fec-uncorrectable-blocks>
  <frequency>193100000</frequency>
  <target-output-power>0.00</target-output-power>
</state>
</optical-channel>
</component>
</components>

```

Validate OpenZR+ logical channels

Use these commands to validate OpenZR+ transceiver logical channels.

Release

This configuration was introduced in OcNOS version 6.5.1.

Optical channel assignment type

The index value in the Openconfig datamodel is shown in ASCII bytes format.

Transforming the index value to the hexadecimal, it is in the format 0xFFSSMMHH, where:

- FF is fp-port (in hexadecimal format);
- SS is slot index, fixed to 0 in case of CMIS modules (in hexadecimal format);
- MM is the optical channel media lane (in hexadecimal format);
- HH is the host lane to which the data-path is assigned (in hexadecimal format).

For example, to calculate the index for an optical channel assignment type:

- fp-port 50 (0x32 in hexadecimal);
- slot-index 0 (0x00 in hexadecimal);
- optical channel media lane 1 (0x01 in hexadecimal);
- host lane 0 (0x00 in hexadecimal).

Index in hexadecimal: 0x32000100

Transforming it to the ASCII bytes format: 838861056

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```

<config>
  <terminal-device xmlns="http://openconfig.net/yang/terminal-device">
    <logical-channels>
      <channel>

```

```

        <index>838861056</index>
    </channel>
</logical-channels>
</terminal-device>
</config>

```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for validating OpenZR+ logical channels.

```

<terminal-device xmlns="http://openconfig.net/yang/terminal-device">
  <logical-channels>
    <channel>
      <index>838861056</index>
      <logical-channel-assignments>
        <assignment>
          <index>1</index>
          <state>
            <assignment-type>OPTICAL_CHANNEL</assignment-type>
            <optical-channel>OCH-0/50</optical-channel>
            <index>1</index>
            <allocation>400.000</allocation>
          </state>
        </assignment>
      </logical-channel-assignments>
    </channel>
  </logical-channels>
</terminal-device>

```

Logical channel assignment type

The index value in the Openconfig datamodel is shown in ASCII bytes format.

Transforming the index value to the hexadecimal, it is in the format 0xFFSSMMHH, where:

- FF is the fp-port (in hexadecimal format);
- SS is the slot-index, fixed to 0 in case of CMIS modules (in hexadecimal format);
- MM is the optical channel media lane (in hexadecimal format);
- HH is the host lane to which the data-path is assigned (in hexadecimal format).

For example, to calculate the index for an logical channel assignment type:

- fp-port 50 (0x32 in hexadecimal);
- slot-index 0 (0x00 in hexadecimal);
- optical channel media lane 0 (0x00 in hexadecimal);

- host lane 1 (0x01 in hexadecimal).

Index in hexadecimal: 0x32000001

Transforming it to the ASCII bytes format: 838860801

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```
<config>
  <terminal-device xmlns="http://openconfig.net/yang/terminal-device">
    <logical-channels>
      <channel>
        <index>838860801</index>
      </channel>
    </logical-channels>
  </terminal-device>
</config>
```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for validating OpenZR+ logical channels.

```
<terminal-device xmlns="http://openconfig.net/yang/terminal-device">
  <logical-channels>
    <channel>
      <index>838860801</index>
      <logical-channel-assignments>
        <assignment>
          <index>1</index>
          <state>
            <assignment-type>LOGICAL_CHANNEL</assignment-type>
            <logical-channel>838861056</logical-channel>
            <index>1</index>
            <allocation>400.000</allocation>
          </state>
        </assignment>
      </logical-channel-assignments>
    </channel>
  </logical-channels>
  <config>
    <logical-channel-type
      xmlns:oc-opt-types="http://openconfig.net/yang/transport-types">oc-
opt-types:PROT_ETHERNET</logical-channel-type>
    </config>
  </state>
  <logical-channel-type
    xmlns:oc-opt-types="http://openconfig.net/yang/transport-types">oc-
opt-types:PROT_ETHERNET</logical-channel-type>
  </state>
  <ingress>
    <state>
      <interface>cd50</interface>
    </state>
  </ingress>
  <ethernet>
    <state>
```

```

    <pre-fec-ber>
      <min>0.0</min>
      <max>0.0</max>
      <avg>0.0</avg>
      <instant>0.0</instant>
    </pre-fec-ber>
    <post-fec-ber>
      <min>0.0</min>
      <max>0.0</max>
      <avg>0.0</avg>
      <instant>0.0</instant>
    </post-fec-ber>
    <out-8021q-frames>0</out-8021q-frames>
    <fec-uncorrectable-blocks>0</fec-uncorrectable-blocks>
  </state>
</ethernet>
<state>
  <index>838860801</index>
</state>
</channel>
</logical-channels>
</terminal-device>

```

Configure OpenZR+ port-breakout

Use the commands to configure OpenZR+ port-breakout.

Release

This configuration was introduced in OcNOS version 6.5.1.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to configure OpenZR+ port-breakout.

```

<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>PORT-CMIS-MODULE-50</name>
      <port>
        <breakout-mode xmlns="http://openconfig.net/yang/platform/port">
          <groups>
            <group>
              <index>0</index>
              <config>
                <index>0</index>
                <num-breakouts>1</num-breakouts>
                <breakout-speed xmlns="http://openconfig.net/yang/interfaces/
ethernet">SPEED_100GB</breakout-speed>
                <num-physical-channels>4</num-physical-channels>
              </config>
            </group>
          </groups>
        </breakout-mode>
      </port>
    </component>
  </components>

```

```
    </port>
  </config>
  <name>PORT-CMIS-MODULE-50</name>
</config>
</component>
</components>
</config>
```

OcNOS CLI Command

The below CLI command is used to configure OpenZR+ port-breakout.

```
port cd50 breakout 1X100g serdes 25g
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to configure OpenZR+ port-breakout.

```
<port-breakout xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-port-breakout">
  <breakouts>
    <breakout>
      <interface>cd50</interface>
      <config>
        <interface>cd50</interface>
        <mode>1X100g</mode>
        <serdes>25g</serdes>
      </config>
    </breakout>
  </breakouts>
</port-breakout>
```

Unconfiguration

Use these commands to unconfigure OpenZR+ port-breakout.

OpenConfig NetConf Payload

Here is a sample OpenConfig NetConf Payload to unconfigure OpenZR+ port-breakout.

```
<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>PORT-CMIS-MODULE-50</name>
      <port>
        <breakout-mode xmlns="http://openconfig.net/yang/platform/port">
          <groups>
            <group operation="delete">
              <index>0</index>
              <config>
                <index>0</index>
                <num-breakouts>1</num-breakouts>
                <breakout-speed xmlns="http://openconfig.net/yang/interfaces/
ethernet">SPEED_100GB</breakout-speed>
                <num-physical-channels>4</num-physical-channels>
              </config>
            </group>
          </groups>
        </breakout-mode>
      </port>
    </component>
  </components>
</config>
```

```
        </group>
      </groups>
    </breakout-mode>
  </port>
</config>
  <name>PORT-CMIS-MODULE-50</name>
</config>
</component>
</components>
</config>
```

OcNOS CLI Command

The below CLI command is used to unconfigure OpenZR+ port-breakout.

```
no port cd50 breakout
```

OcNOS NetConf Payload

Here is a sample OcNOS NetConf Payload to unconfigure OpenZR+ port-breakout.

```
<port-breakout xmlns="http://www.ipinfusion.com/yang/ocnos/ipi-port-breakout">
  <breakouts>
    <breakout operation="delete">
      <interface>cd50</interface>
    </breakout>
  </breakouts>
</port-breakout>
```

Validate OpenZR+ port-breakout

Use these commands to validate OpenZR+ port-breakout.

Release

This configuration was introduced in OcNOS version 6.5.1.

Get OpenConfig Payload

This filter for the Get operation results in the Get OpenConfig Return output shown below.

```
<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>CMIS-MODULE-50</name>
      <port>
        <breakout-mode>
          <groups>
            <group>
              <index>0</index>
              <state />
            </group>
          </groups>
        </breakout-mode>
      </port>
    </component>
  </components>
</config>
```

```

        </breakout-mode>
    </port>
</component>
</components>
</config>

```

Get OpenConfig Return

This validation response provides information on the configuration and runtime for validating OpenZR+ port-breakout.

```

<config>
  <components xmlns="http://openconfig.net/yang/platform">
    <component>
      <name>PORT-CMIS-MODULE-50</name>
      <port>
        <breakout-mode xmlns="http://openconfig.net/yang/platform/port">
          <groups>
            <group>
              <index>0</index>
              <state>
                <index>0</index>
                <num-breakouts>1</num-breakouts>
                <breakout-speed xmlns="http://openconfig.net/yang/interfaces/
ethernet">SPEED_100GB</breakout-speed>
                <num-physical-channels>4</num-physical-channels>
              </state>
            </group>
          </groups>
        </breakout-mode>
      </port>
    </component>
  </components>
</config>

```

PYANG Tree

module: openconfig-acl

```
+--rw acl
  +--rw acl-sets
    | +--rw acl-set* [name type]
    |   +--rw name      -> ../config/name
    |   +--rw type      -> ../config/type
    |   +--rw config
    |     | +--rw name?      string
    |     | +--rw type?      identityref
    |     | +--rw description? string
    |     +--ro state
    |       | +--ro name?      string
    |       | +--ro type?      identityref
    |       | +--ro description? string
    |       +--rw acl-entries
    |         +--rw acl-entry* [sequence-id]
    |           +--rw sequence-id -> ../config/sequence-id
    |           +--rw config
    |             | +--rw sequence-id? uint32
    |             +--ro state
    |               | +--ro sequence-id? uint32
    |               +--rw l2
    |                 | +--rw config
    |                 | | +--rw source-mac?      openconfig-yang-types:mac-address
    |                 | | +--rw source-mac-mask?  openconfig-yang-types:mac-address
    |                 | | +--rw destination-mac?  openconfig-yang-types:mac-address
    |                 | | +--rw destination-mac-mask? openconfig-yang-types:mac-address
    |                 | | +--rw ethertype?        oc-pkt-match-types:ethertype-type
    |                 | +--ro state
    |                 |   +--ro source-mac?      openconfig-yang-types:mac-address
    |                 |   +--ro source-mac-mask?  openconfig-yang-types:mac-address
```



```

|   |   +--ro destination-mac?      openconfig-yang-types:mac-address
|   |   +--ro destination-mac-mask? openconfig-yang-types:mac-address
|   |   +--ro ethertype?            oc-pkt-match-types:ethertype-type
|   +--rw ipv4
|   |   +--rw config
|   |   |   +--rw source-address?    oc-inet:ipv4-prefix
|   |   |   +--rw destination-address? oc-inet:ipv4-prefix
|   |   |   +--rw dscp?              oc-inet:dscp
|   |   |   +--rw protocol?          oc-pkt-match-types:ip-protocol-type
|   |   +--ro state
|   |   |   +--ro source-address?    oc-inet:ipv4-prefix
|   |   |   +--ro destination-address? oc-inet:ipv4-prefix
|   |   |   +--ro dscp?              oc-inet:dscp
|   |   |   +--ro protocol?          oc-pkt-match-types:ip-protocol-type
|   +--rw ipv6
|   |   +--rw config
|   |   |   +--rw source-address?    oc-inet:ipv6-prefix
|   |   |   +--rw source-flow-label? oc-inet:ipv6-flow-label
|   |   |   +--rw destination-address? oc-inet:ipv6-prefix
|   |   |   +--rw dscp?              oc-inet:dscp
|   |   |   +--rw protocol?          oc-pkt-match-types:ip-protocol-type
|   |   +--ro state
|   |   |   +--ro source-address?    oc-inet:ipv6-prefix
|   |   |   +--ro destination-address? oc-inet:ipv6-prefix
|   |   |   +--ro dscp?              oc-inet:dscp
|   |   |   +--ro protocol?          oc-pkt-match-types:ip-protocol-type
|   +--rw transport
|   |   +--rw config
|   |   |   +--rw source-port?      oc-pkt-match-types:port-num-range
|   |   |   +--rw destination-port? oc-pkt-match-types:port-num-range
|   |   |   +--rw detail-mode?      enumeration
|   |   |   +--rw explicit-tcp-flags* identityref
|   |   +--ro state
|   |   |   +--ro source-port?      oc-pkt-match-types:port-num-range
|   |   |   +--ro destination-port? oc-pkt-match-types:port-num-range
|   |   +--ro detail-mode?          enumeration

```

```

|      | +--ro explicit-tcp-flags* identityref
|      +--rw actions
|      +--rw config
|      | +--rw forwarding-action identityref
|      | +--rw log-action? identityref
|      +--ro state
|      +--ro forwarding-action identityref
|      +--ro log-action? identityref
+--rw interfaces
+--rw interface* [id]
+--rw id -> ../config/id
+--rw config
| +--rw id? openconfig-interfaces:interface-id
+--ro state
| +--ro id? openconfig-interfaces:interface-id
+--rw interface-ref
| +--rw config
| | +--rw interface? -> /openconfig-interfaces:interfaces/interface/name
| | +--rw subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()/../interface]/
subinterfaces/subinterface/index
| +--ro state
| +--ro interface? -> /openconfig-interfaces:interfaces/interface/name
| +--ro subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()/../interface]/
subinterfaces/subinterface/index
+--rw ingress-acl-sets
| +--rw ingress-acl-set* [set-name type]
| +--rw set-name -> ../config/set-name
| +--rw type -> ../config/type
| +--rw config
| | +--rw set-name? -> ../../../../acl-sets/acl-set/config/name
| | +--rw type? -> ../../../../acl-sets/acl-set[name=current()/../set-name]/config/type
| +--ro state
| +--ro set-name? -> ../../../../acl-sets/acl-set/config/name
| +--ro type? -> ../../../../acl-sets/acl-set[name=current()/../set-name]/config/type
+--rw egress-acl-sets
+--rw egress-acl-set* [set-name type]
+--rw set-name -> ../config/set-name

```

```

+--rw type      -> ../config/type
+--rw config
| +--rw set-name? -> ../../../../acl-sets/acl-set/config/name
| +--rw type?     -> ../../../../acl-sets/acl-set[name=current()]/../set-name/config/type
+--ro state
  +--ro set-name? -> ../../../../acl-sets/acl-set/config/name
  +--ro type?     -> ../../../../acl-sets/acl-set[name=current()]/../set-name/config/type

```

module: openconfig-bfd

```

+--rw bfd
  +--rw interfaces
    +--rw interface* [id]
      +--rw id          -> ../config/id
      +--rw config
        | +--rw id?          string
        | +--rw enabled?     boolean
        | +--rw desired-minimum-tx-interval? uint32
        | +--rw required-minimum-receive?   uint32
        | +--rw detection-multiplier?      uint8
        +--ro state
          | +--ro id?          string
          | +--ro enabled?     boolean
          | +--ro desired-minimum-tx-interval? uint32
          | +--ro required-minimum-receive?   uint32
          | +--ro detection-multiplier?      uint8
          | +--ro enable-per-member-link?    boolean
          +--rw interface-ref
            | +--rw config
            | | +--rw interface? -> /openconfig-interfaces:interfaces/interface/name
            | | +--rw subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()]/../interface/
            subinterfaces/subinterface/index
            | +--ro state
            | | +--ro interface? -> /openconfig-interfaces:interfaces/interface/name
            | | +--ro subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()]/../interface/
            subinterfaces/subinterface/index

```

```

+--ro micro-bfd-sessions
| +--ro micro-bfd-session* [member-interface]
|   +--ro member-interface  -> ../state/member-interface
|   +--ro state
|     +--ro member-interface?    -> /openconfig-interfaces:interfaces/interface/config/name
|     +--ro session-state?       bfd-session-state
|     +--ro remote-session-state? bfd-session-state
|     +--ro local-discriminator? string
|     +--ro remote-discriminator? string
|     +--ro local-diagnostic-code? bfd-diagnostic-code
|     +--ro remote-diagnostic-code? bfd-diagnostic-code
+--rw peers
+--ro peer* [local-discriminator]
  +--ro local-discriminator  -> ../state/local-discriminator
  +--ro state
    +--ro local-address?      openconfig-inet-types:ip-address
    +--ro remote-address?     openconfig-inet-types:ip-address
    +--ro subscribed-protocols* identityref
    +--ro session-state?      bfd-session-state
    +--ro remote-session-state? bfd-session-state
    +--ro local-discriminator? string
    +--ro remote-discriminator? string
    +--ro local-diagnostic-code? bfd-diagnostic-code
    +--ro remote-minimum-receive-interval? uint32
    +--ro demand-mode-requested? boolean
    +--ro remote-authentication-enabled? boolean
    +--ro echo
    | +--ro active?           boolean
    | +--ro transmitted-packets? uint64
    | +--ro up-transitions?   uint64
    +--ro async
      +--ro transmitted-packets? uint64
      +--ro received-packets?   uint64
      +--ro up-transitions?     uint64
  
```

module: openconfig-if-aggregate

augment /oc-if:interfaces/oc-if:interface/oc-eth:ethernet/oc-eth:config:

+--rw aggregate-id? -> /openconfig-interfaces:interfaces/interface/name

augment /oc-if:interfaces/oc-if:interface/oc-eth:ethernet/oc-eth:state:

+--ro aggregate-id? -> /openconfig-interfaces:interfaces/interface/name

module: openconfig-if-ip

augment /oc-if:interfaces/oc-if:interface/oc-vlan:routed-vlan:

+--rw ipv4

+--rw addresses

| +--rw address* [ip]

| +--rw ip -> ../config/ip

| +--rw config

| | +--rw ip? openconfig-inet-types:ipv4-address

| | +--rw prefix-length? uint8

| +--ro state

| | +--ro ip? openconfig-inet-types:ipv4-address

| | +--ro prefix-length? uint8

| | +--ro origin? ip-address-origin

| +--rw vrrp

| +--rw vrrp-group* [virtual-router-id]

| +--rw virtual-router-id -> ../config/virtual-router-id

| +--rw config

| | +--rw virtual-router-id? uint8

| | +--rw virtual-address* openconfig-inet-types:ip-address

| | +--rw priority? uint8

| | +--rw preempt? boolean

| | +--rw preempt-delay? uint16

| | +--rw accept-mode? boolean

| | +--rw advertisement-interval? uint16

| +--ro state

```

|   | +--ro virtual-router-id?      uint8
|   | +--ro virtual-address*        openconfig-inet-types:ip-address
|   | +--ro priority?               uint8
|   | +--ro preempt?                boolean
|   | +--ro preempt-delay?          uint16
|   | +--ro accept-mode?            boolean
|   | +--ro advertisement-interval? uint16
|   | +--ro current-priority?       uint8
|   +--rw interface-tracking
|       +--rw config
|           | +--rw track-interface* -> /openconfig-interfaces:interfaces/interface/name
|           | +--rw priority-decrement? uint8
|           +--ro state
|               +--ro track-interface* -> /openconfig-interfaces:interfaces/interface/name
|               +--ro priority-decrement? uint8
+--rw proxy-arp
| +--rw config
| | +--rw mode? enumeration
| +--ro state
|   +--ro mode? enumeration
+--rw neighbors
| +--rw neighbor* [ip]
|   +--rw ip      -> ../config/ip
|   +--rw config
|       | +--rw ip?          openconfig-inet-types:ipv4-address
|       | +--rw link-layer-address openconfig-yang-types:phys-address
|       +--ro state
|           +--ro ip?          openconfig-inet-types:ipv4-address
|           +--ro link-layer-address openconfig-yang-types:phys-address
|           +--ro origin?      neighbor-origin
+--rw unnumbered
| +--rw config
| | +--rw enabled? boolean
| +--ro state
| | +--ro enabled? boolean
| +--rw interface-ref

```

```

|   +--rw config
|   |   +--rw interface?   -> /openconfig-interfaces:interfaces/interface/name
|   |   |   +--rw subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()]/../interface]/
subinterfaces/subinterface/index
|   |   +--ro state
|   |       +--ro interface?   -> /openconfig-interfaces:interfaces/interface/name
|   |       |   +--ro subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()]/../interface]/
subinterfaces/subinterface/index
+--rw config
| +--rw enabled?    boolean
| +--rw mtu?        uint16
| +--rw dhcp-client? boolean
+--ro state
| +--ro enabled?    boolean
| +--ro mtu?        uint16
| +--ro dhcp-client? boolean
+--ro counters
| +--ro in-pkts?      openconfig-yang-types:counter64
| +--ro in-octets?    openconfig-yang-types:counter64
| +--ro in-error-pkts? openconfig-yang-types:counter64
| +--ro in-forwarded-pkts? openconfig-yang-types:counter64
| +--ro in-forwarded-octets? openconfig-yang-types:counter64
| +--ro in-discarded-pkts? openconfig-yang-types:counter64
| +--ro out-pkts?     openconfig-yang-types:counter64
| +--ro out-octets?   openconfig-yang-types:counter64
| +--ro out-error-pkts? openconfig-yang-types:counter64
| +--ro out-forwarded-pkts? openconfig-yang-types:counter64
| +--ro out-forwarded-octets? openconfig-yang-types:counter64
| +--ro out-discarded-pkts? openconfig-yang-types:counter64
augment /oc-if:interfaces/oc-if:interface/oc-vlan:routed-vlan:
+--rw ipv6
| +--rw addresses
| | +--rw address* [ip]
| |   +--rw ip      -> ../config/ip
| |   +--rw config
| |   |   +--rw ip?      openconfig-inet-types:ipv6-address
| |   |   +--rw prefix-length  uint8

```

```

| | +--rw type?          openconfig-inet-types:ipv6-address-type
| +--ro state
| | +--ro ip?           openconfig-inet-types:ipv6-address
| | +--ro prefix-length uint8
| | +--ro type?         openconfig-inet-types:ipv6-address-type
| | +--ro origin?       ip-address-origin
| | +--ro status?       enumeration
| +--rw vrrp
|   +--rw vrrp-group* [virtual-router-id]
|     +--rw virtual-router-id -> ../config/virtual-router-id
|     +--rw config
|       | +--rw virtual-router-id?   uint8
|       | +--rw virtual-address*     openconfig-inet-types:ip-address
|       | +--rw priority?            uint8
|       | +--rw preempt?             boolean
|       | +--rw preempt-delay?       uint16
|       | +--rw accept-mode?         boolean
|       | +--rw advertisement-interval? uint16
|       | +--rw virtual-link-local?  openconfig-inet-types:ip-address
|     +--ro state
|       | +--ro virtual-router-id?   uint8
|       | +--ro virtual-address*     openconfig-inet-types:ip-address
|       | +--ro priority?            uint8
|       | +--ro preempt?             boolean
|       | +--ro preempt-delay?       uint16
|       | +--ro accept-mode?         boolean
|       | +--ro advertisement-interval? uint16
|       | +--ro current-priority?    uint8
|       | +--ro virtual-link-local?  openconfig-inet-types:ip-address
|     +--rw interface-tracking
|       +--rw config
|         | +--rw track-interface* -> /openconfig-interfaces:interfaces/interface/name
|         | +--rw priority-decrement? uint8
|       +--ro state
|         +--ro track-interface* -> /openconfig-interfaces:interfaces/interface/name
|         +--ro priority-decrement? uint8

```



```

+--rw router-advertisement
| +--rw config
| | +--rw interval?    uint32
| | +--rw lifetime?    uint32
| | +--rw suppress?    boolean
| | +--rw managed?     boolean
| | +--rw other-config? boolean
| +--ro state
| | +--ro interval?    uint32
| | +--ro lifetime?    uint32
| | +--ro suppress?    boolean
| | +--ro managed?     boolean
| | +--ro other-config? boolean
| +--rw prefixes
|   +--rw prefix* [prefix]
|     +--rw prefix  -> ../config/prefix
|     +--rw config
|       | +--rw prefix?          openconfig-inet-types:ipv6-prefix
|       | +--rw valid-lifetime?  uint32
|       | +--rw preferred-lifetime?  uint32
|       | +--rw disable-advertisement?  boolean
|       | +--rw disable-autoconfiguration?  boolean
|       | +--rw enable-onlink?    boolean
|       +--ro state
|         +--ro prefix?          openconfig-inet-types:ipv6-prefix
|         +--ro valid-lifetime?  uint32
|         +--ro preferred-lifetime?  uint32
|         +--ro disable-advertisement?  boolean
|         +--ro disable-autoconfiguration?  boolean
|         +--ro enable-onlink?    boolean
+--rw neighbors
| +--rw neighbor* [ip]
|   +--rw ip      -> ../config/ip
|   +--rw config
|     | +--rw ip?          openconfig-inet-types:ipv6-address
|     | +--rw link-layer-address  openconfig-yang-types:phys-address

```

```

|   +--ro state
|   +--ro ip?          openconfig-inet-types:ipv6-address
|   +--ro link-layer-address openconfig-yang-types:phys-address
|   +--ro origin?      neighbor-origin
|   +--ro is-router?    boolean
|   +--ro neighbor-state? enumeration
+--rw unnumbered
| +--rw config
| | +--rw enabled? boolean
| +--ro state
| | +--ro enabled? boolean
| +--rw interface-ref
|   +--rw config
|   | +--rw interface? -> /openconfig-interfaces:interfaces/interface/name
|   | +--rw subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if.name=current()]/../interface]/
subinterfaces/subinterface/index
|   +--ro state
|   +--ro interface? -> /openconfig-interfaces:interfaces/interface/name
|   +--ro subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if.name=current()]/../interface]/
subinterfaces/subinterface/index
+--rw config
| +--rw enabled?          boolean
| +--rw mtu?              uint32
| +--rw dup-addr-detect-transmits? uint32
| +--rw dhcp-client?      boolean
+--ro state
+--ro enabled?          boolean
+--ro mtu?              uint32
+--ro dup-addr-detect-transmits? uint32
+--ro dhcp-client?      boolean
+--ro counters
+--ro in-pkts?          openconfig-yang-types:counter64
+--ro in-octets?        openconfig-yang-types:counter64
+--ro in-error-pkts?    openconfig-yang-types:counter64
+--ro in-forwarded-pkts? openconfig-yang-types:counter64
+--ro in-forwarded-octets? openconfig-yang-types:counter64
+--ro in-discarded-pkts? openconfig-yang-types:counter64

```

```

+--ro out-pkts?          openconfig-yang-types:counter64
+--ro out-octets?        openconfig-yang-types:counter64
+--ro out-error-pkts?    openconfig-yang-types:counter64
+--ro out-forwarded-pkts? openconfig-yang-types:counter64
+--ro out-forwarded-octets? openconfig-yang-types:counter64
+--ro out-discarded-pkts? openconfig-yang-types:counter64

```

module: openconfig-interfaces

+--rw interfaces

+--rw interface* [name]

+--rw name -> ../config/name

+--rw config

| +--rw name? string

| +--rw type identityref

| +--rw mtu? uint16

| +--rw description? string

| +--rw enabled? boolean

| +--rw openconfig-vlan:tpid? identityref

+--ro state

| +--ro name? string

| +--ro type identityref

| +--ro mtu? uint16

| +--ro description? string

| +--ro enabled? boolean

| +--ro ifindex? uint32

| +--ro admin-status enumeration

| +--ro oper-status enumeration

| +--ro last-change? openconfig-types:timeticks64

| +--ro logical? boolean

| +--ro counters

| | +--ro in-octets? openconfig-yang-types:counter64

| | +--ro in-pkts? openconfig-yang-types:counter64

| | +--ro in-unicast-pkts? openconfig-yang-types:counter64

| | +--ro in-broadcast-pkts? openconfig-yang-types:counter64

| | +--ro in-multicast-pkts? openconfig-yang-types:counter64

```

| | +--ro in-discards?      openconfig-yang-types:counter64
| | +--ro in-errors?       openconfig-yang-types:counter64
| | +--ro in-fcs-errors?   openconfig-yang-types:counter64
| | +--ro out-octets?      openconfig-yang-types:counter64
| | +--ro out-pkts?        openconfig-yang-types:counter64
| | +--ro out-unicast-pkts? openconfig-yang-types:counter64
| | +--ro out-broadcast-pkts? openconfig-yang-types:counter64
| | +--ro out-multicast-pkts? openconfig-yang-types:counter64
| | +--ro out-discards?    openconfig-yang-types:counter64
| | +--ro out-errors?      openconfig-yang-types:counter64
| | +--ro last-clear?      openconfig-types:timeticks64
| +--ro openconfig-vlan:tpid? identityref
+--rw subinterfaces
| +--rw subinterface* [index]
|   +--rw index      -> ../config/index
|   +--rw config
|     | +--rw index?      uint32
|     | +--rw description? string
|     | +--rw enabled?    boolean
|     +--ro state
|       | +--ro index?      uint32
|       | +--ro description? string
|       | +--ro enabled?    boolean
|       | +--ro name?       string
|       | +--ro ifindex?    uint32
|       | +--ro oper-status enumeration
|       | +--ro last-change? openconfig-types:timeticks64
|       | +--ro logical?    boolean
|       +--ro counters
|         | +--ro in-octets?      openconfig-yang-types:counter64
|         | +--ro in-pkts?        openconfig-yang-types:counter64
|         | +--ro in-unicast-pkts? openconfig-yang-types:counter64
|         | +--ro in-broadcast-pkts? openconfig-yang-types:counter64
|         | +--ro in-multicast-pkts? openconfig-yang-types:counter64
|         | +--ro in-discards?    openconfig-yang-types:counter64
|         | +--ro in-errors?      openconfig-yang-types:counter64

```

```

| | +--ro in-fcs-errors?      openconfig-yang-types:counter64
| | +--ro out-octets?        openconfig-yang-types:counter64
| | +--ro out-pkts?          openconfig-yang-types:counter64
| | +--ro out-unicast-pkts?   openconfig-yang-types:counter64
| | +--ro out-broadcast-pkts? openconfig-yang-types:counter64
| | +--ro out-multicast-pkts? openconfig-yang-types:counter64
| | +--ro out-discards?       openconfig-yang-types:counter64
| | +--ro out-errors?         openconfig-yang-types:counter64
| | +--ro last-clear?         openconfig-types:timeticks64
| +--rw openconfig-vlan:vlan
| | +--rw openconfig-vlan:match
| | | +--rw openconfig-vlan:single-tagged-list
| | | | +--rw openconfig-vlan:config
| | | | | +--rw openconfig-vlan:vlan-ids* openconfig-vlan-types:vlan-id
| | | | | +--ro openconfig-vlan:state
| | | | | +--ro openconfig-vlan:vlan-ids* openconfig-vlan-types:vlan-id
| | | | +--rw openconfig-vlan:single-tagged-range
| | | | | +--rw openconfig-vlan:config
| | | | | +--rw openconfig-vlan:low-vlan-id? openconfig-vlan-types:vlan-id
| | | | | +--rw openconfig-vlan:high-vlan-id? openconfig-vlan-types:vlan-id
| | | | | +--ro openconfig-vlan:state
| | | | | +--ro openconfig-vlan:low-vlan-id? openconfig-vlan-types:vlan-id
| | | | | +--ro openconfig-vlan:high-vlan-id? openconfig-vlan-types:vlan-id
| | | +--rw openconfig-vlan:double-tagged
| | | | +--rw openconfig-vlan:config
| | | | | +--rw openconfig-vlan:inner-vlan-id? openconfig-vlan-types:vlan-id
| | | | | +--rw openconfig-vlan:outer-vlan-id? openconfig-vlan-types:vlan-id
| | | | | +--ro openconfig-vlan:state
| | | | | +--ro openconfig-vlan:inner-vlan-id? openconfig-vlan-types:vlan-id
| | | | | +--ro openconfig-vlan:outer-vlan-id? openconfig-vlan-types:vlan-id
| | | +--rw openconfig-vlan:double-tagged-outer-list
| | | | +--rw openconfig-vlan:config
| | | | | +--rw openconfig-vlan:outer-vlan-ids* openconfig-vlan-types:vlan-id
| | | | | +--ro openconfig-vlan:state
| | | | | +--ro openconfig-vlan:outer-vlan-ids* openconfig-vlan-types:vlan-id
| | | +--rw openconfig-vlan:double-tagged-outer-range

```

```

|   |   | +--rw openconfig-vlan:config
|   |   | +--rw openconfig-vlan:outer-low-vlan-id?  openconfig-vlan-types:vlan-id
|   |   | +--rw openconfig-vlan:outer-high-vlan-id?  openconfig-vlan-types:vlan-id
|   |   | +--ro openconfig-vlan:state
|   |   |   +--ro openconfig-vlan:outer-low-vlan-id?  openconfig-vlan-types:vlan-id
|   |   |   +--ro openconfig-vlan:outer-high-vlan-id?  openconfig-vlan-types:vlan-id
|   | +--rw openconfig-vlan:double-tagged-inner-outer-range
|   |   +--rw openconfig-vlan:config
|   |   | +--rw openconfig-vlan:inner-low-vlan-id?  openconfig-vlan-types:vlan-id
|   |   | +--rw openconfig-vlan:inner-high-vlan-id?  openconfig-vlan-types:vlan-id
|   |   | +--rw openconfig-vlan:outer-low-vlan-id?  openconfig-vlan-types:vlan-id
|   |   | +--rw openconfig-vlan:outer-high-vlan-id?  openconfig-vlan-types:vlan-id
|   |   +--ro openconfig-vlan:state
|   |       +--ro openconfig-vlan:inner-low-vlan-id?  openconfig-vlan-types:vlan-id
|   |       +--ro openconfig-vlan:inner-high-vlan-id?  openconfig-vlan-types:vlan-id
|   |       +--ro openconfig-vlan:outer-low-vlan-id?  openconfig-vlan-types:vlan-id
|   |       +--ro openconfig-vlan:outer-high-vlan-id?  openconfig-vlan-types:vlan-id
|   +--rw openconfig-vlan:ingress-mapping
|   | +--rw openconfig-vlan:config
|   |   +--rw openconfig-vlan:vlan-stack-action?  openconfig-vlan-types:vlan-stack-action
|   |   +--rw openconfig-vlan:vlan-id?  openconfig-vlan-types:vlan-id
|   |   +--rw openconfig-vlan:tpid?  identityref
|   |   +--ro openconfig-vlan:state
|   |       +--ro openconfig-vlan:vlan-stack-action?  openconfig-vlan-types:vlan-stack-action
|   |       +--ro openconfig-vlan:vlan-id?  openconfig-vlan-types:vlan-id
|   |       +--ro openconfig-vlan:tpid?  identityref
| +--rw openconfig-if-ip:ipv4
|   | +--rw openconfig-if-ip:addresses
|   |   +--rw openconfig-if-ip:address* [ip]
|   |   | +--rw openconfig-if-ip:ip  -> ../config/ip
|   |   | +--rw openconfig-if-ip:config
|   |   |   +--rw openconfig-if-ip:ip?  openconfig-inet-types:ipv4-address
|   |   |   +--rw openconfig-if-ip:prefix-length?  uint8
|   |   |   +--rw ipi-oc-if-deviations:type?  ipv4-address-type
|   |   +--ro openconfig-if-ip:state
|   |       +--ro openconfig-if-ip:ip?  openconfig-inet-types:ipv4-address

```

```

| | |   +--ro openconfig-if-ip:prefix-length?  uint8
| | |   +--ro ipi-oc-if-deviations:type?  ipv4-address-type
| | +--rw openconfig-if-ip:config
| | | +--rw openconfig-if-ip:dhcp-client?  boolean
| | | +--ro openconfig-if-ip:state
| |   +--ro openconfig-if-ip:dhcp-client?  boolean
|   +--rw openconfig-if-ip:ipv6
|     +--rw openconfig-if-ip:addresses
|       | +--rw openconfig-if-ip:address* [ip]
|       |   +--rw openconfig-if-ip:ip  -> ../config/ip
|       |   +--rw openconfig-if-ip:config
|       | | +--rw openconfig-if-ip:ip?  openconfig-inet-types:ipv6-address
|       | | +--rw openconfig-if-ip:prefix-length  uint8
|       |   +--ro openconfig-if-ip:state
|       |   +--ro openconfig-if-ip:ip?  openconfig-inet-types:ipv6-address
|       |   +--ro openconfig-if-ip:prefix-length  uint8
|     +--rw openconfig-if-ip:config
|       | +--rw openconfig-if-ip:dhcp-client?  boolean
|     +--ro openconfig-if-ip:state
|       +--ro openconfig-if-ip:dhcp-client?  boolean
+--rw openconfig-if-ethernet:ethernet
| +--rw openconfig-if-ethernet:config
| | +--rw openconfig-if-ethernet:mac-address?  openconfig-yang-types:mac-address
| | +--rw openconfig-if-ethernet:auto-negotiate?  boolean
| | +--rw openconfig-if-ethernet:duplex-mode?  enumeration
| | +--rw openconfig-if-ethernet:port-speed?  identityref
| | +--rw openconfig-if-aggregate:aggregate-id?  -> /openconfig-interfaces:interfaces/interface/name
| | +--rw ipi-oc-if-deviations:lacp-mode?  openconfig-lacp:lacp-activity-type
| | +--rw ipi-oc-if-deviations:load-interval?  uint16
| +--ro openconfig-if-ethernet:state
| | +--ro openconfig-if-ethernet:mac-address?  openconfig-yang-types:mac-address
| | +--ro openconfig-if-ethernet:auto-negotiate?  boolean
| | +--ro openconfig-if-ethernet:duplex-mode?  enumeration
| | +--ro openconfig-if-ethernet:port-speed?  identityref
| | +--ro openconfig-if-ethernet:hw-mac-address?  string
| | +--ro openconfig-if-ethernet:negotiated-duplex-mode?  enumeration

```

```

| | +--ro openconfig-if-ethernet:negotiated-port-speed? identityref
| | +--ro openconfig-if-ethernet:counters
| | | +--ro openconfig-if-ethernet:in-oversize-frames? openconfig-yang-types:counter64
| | | +--ro openconfig-if-ethernet:in-jabber-frames? openconfig-yang-types:counter64
| | | +--ro openconfig-if-ethernet:in-fragment-frames? openconfig-yang-types:counter64
| | | +--ro openconfig-if-ethernet:in-crc-errors? openconfig-yang-types:counter64
| | +--ro openconfig-if-aggregate:aggregate-id? -> /openconfig-interfaces:interfaces/interface/name
| | +--ro ipi-oc-if-deviations:lacp-mode? openconfig-lacp:lacp-activity-type
| | +--ro ipi-oc-if-deviations:load-interval? uint16
| +--rw openconfig-vlan:switched-vlan
|   +--rw openconfig-vlan:config
|     | +--rw openconfig-vlan:interface-mode? openconfig-vlan-types:vlan-mode-type
|     | +--rw openconfig-vlan:native-vlan? openconfig-vlan-types:vlan-id
|     | +--rw openconfig-vlan:access-vlan? openconfig-vlan-types:vlan-id
|     | +--rw openconfig-vlan:trunk-vlans* union
|     +--ro openconfig-vlan:state
|       +--ro openconfig-vlan:interface-mode? openconfig-vlan-types:vlan-mode-type
|       +--ro openconfig-vlan:native-vlan? openconfig-vlan-types:vlan-id
|       +--ro openconfig-vlan:access-vlan? openconfig-vlan-types:vlan-id
|       +--ro openconfig-vlan:trunk-vlans* union
+--rw openconfig-if-aggregate:aggregation
| +--rw openconfig-if-aggregate:config
| | +--rw openconfig-if-aggregate:lag-type? aggregation-type
| | +--rw openconfig-if-aggregate:min-links? uint8
| | +--rw ipi-oc-if-deviations:mlag-id? uint16
| +--ro openconfig-if-aggregate:state
| | +--ro openconfig-if-aggregate:lag-type? aggregation-type
| | +--ro openconfig-if-aggregate:min-links? uint16
| | +--ro ipi-oc-if-deviations:mlag-id? uint16
| +--rw openconfig-vlan:switched-vlan
|   +--rw openconfig-vlan:config
|     | +--rw openconfig-vlan:interface-mode? openconfig-vlan-types:vlan-mode-type
|     | +--rw openconfig-vlan:native-vlan? openconfig-vlan-types:vlan-id
|     | +--rw openconfig-vlan:access-vlan? openconfig-vlan-types:vlan-id
|     | +--rw openconfig-vlan:trunk-vlans* union
|     +--ro openconfig-vlan:state

```

```

|   +--ro openconfig-vlan:interface-mode? openconfig-vlan-types:vlan-mode-type
|   +--ro openconfig-vlan:native-vlan? openconfig-vlan-types:vlan-id
|   +--ro openconfig-vlan:access-vlan? openconfig-vlan-types:vlan-id
|   +--ro openconfig-vlan:trunk-vlans* union
+--rw openconfig-if-tunnel:tunnel
  +--rw openconfig-if-tunnel:config
    | +--rw openconfig-if-tunnel:src? openconfig-inet-types:ip-address
    | +--rw openconfig-if-tunnel:dst? openconfig-inet-types:ip-address
    | +--rw openconfig-if-tunnel:ttl? uint8
  +--ro openconfig-if-tunnel:state
    | +--ro openconfig-if-tunnel:src? openconfig-inet-types:ip-address
    | +--ro openconfig-if-tunnel:dst? openconfig-inet-types:ip-address
    | +--ro openconfig-if-tunnel:ttl? uint8
  +--rw openconfig-if-tunnel:ipv4
    | +--rw openconfig-if-tunnel:addresses
    | | +--rw openconfig-if-tunnel:address* [ip]
    | |   +--rw openconfig-if-tunnel:ip -> ../config/ip
    | |   +--rw openconfig-if-tunnel:config
    | | | +--rw openconfig-if-tunnel:ip? openconfig-inet-types:ipv4-address
    | | | +--rw openconfig-if-tunnel:prefix-length? uint8
    | | | +--rw ipi-oc-if-deviations:type? ipv4-address-type
    | | +--ro openconfig-if-tunnel:state
    | |   +--ro openconfig-if-tunnel:ip? openconfig-inet-types:ipv4-address
    | |   +--ro openconfig-if-tunnel:prefix-length? uint8
    | |   +--ro ipi-oc-if-deviations:type? ipv4-address-type
    | +--rw openconfig-if-tunnel:unnumbered
    | +--rw openconfig-if-tunnel:config
    | | +--rw openconfig-if-tunnel:enabled? boolean
    | +--ro openconfig-if-tunnel:state
    | | +--ro openconfig-if-tunnel:enabled? boolean
    | +--rw openconfig-if-tunnel:interface-ref
    |   +--rw openconfig-if-tunnel:config
    | | +--rw openconfig-if-tunnel:interface? -> /openconfig-interfaces:interfaces/interface/name
    | | +--rw openconfig-if-tunnel:subinterface? -> /openconfig-interfaces:interfaces/interface[oc-
if:name=current()/../interface]/subinterfaces/subinterface/index
    |   +--ro openconfig-if-tunnel:state
    |   +--ro openconfig-if-tunnel:interface? -> /openconfig-interfaces:interfaces/interface/name

```

```

|      +--ro openconfig-if-tunnel:subinterface? -> /openconfig-interfaces:interfaces/interface[oc-
if:name=current()/../interface]/subinterfaces/subinterface/index
+--rw openconfig-if-tunnel:ipv6
+--rw openconfig-if-tunnel:addresses
+--rw openconfig-if-tunnel:address* [ip]
+--rw openconfig-if-tunnel:ip -> ../config/ip
+--rw openconfig-if-tunnel:config
| +--rw openconfig-if-tunnel:ip? openconfig-inet-types:ipv6-address
| +--rw openconfig-if-tunnel:prefix-length uint8
+--ro openconfig-if-tunnel:state
+--ro openconfig-if-tunnel:ip? openconfig-inet-types:ipv6-address
+--ro openconfig-if-tunnel:prefix-length uint8

```

module: openconfig-lacp

```

+--rw lacp
+--rw config
| +--rw system-priority? uint16
+--ro state
+--ro system-priority? uint16

```

module: openconfig-lldp

```

+--rw lldp
+--rw config
| +--rw enabled? boolean
| +--rw suppress-tlv-advertisement* identityref
| +--rw system-name? string
| +--rw chassis-id? string
| +--rw chassis-id-type? openconfig-llldp-types:chassis-id-type
+--ro state
| +--ro enabled? boolean
| +--ro suppress-tlv-advertisement* identityref
| +--ro system-name? string
| +--ro chassis-id? string

```

```

| +--ro chassis-id-type?      openconfig-ldp-types:chassis-id-type
+--rw interfaces
  +--rw interface* [name]
    +--rw name      -> ../config/name
    +--rw config
      | +--rw name?    openconfig-interfaces:base-interface-ref
      | +--rw enabled? boolean
      +--ro state
        | +--ro name?    openconfig-interfaces:base-interface-ref
        | +--ro enabled? boolean
        | +--ro counters
        |   +--ro frame-out? ietf-yang-types:counter64
        |   +--ro last-clear? ietf-yang-types:date-and-time
      +--ro neighbors
        +--ro neighbor* [id]
          +--ro id      -> ../state/id
          +--ro state
            | +--ro system-name?      string
            | +--ro system-description? string
            | +--ro chassis-id?       string
            | +--ro chassis-id-type?  openconfig-ldp-types:chassis-id-type
            | +--ro id?               string
            | +--ro ttl?              uint16
            | +--ro port-id?          string
            | +--ro port-id-type?     openconfig-ldp-types:port-id-type
            | +--ro port-description? string
            | +--ro management-address? string
            | +--ro management-address-type? string
          +--ro custom-tlvs
            | +--ro tlv* [type oui oui-subtype]
            |   +--ro type      -> ../state/type
            |   +--ro oui       -> ../state/oui
            |   +--ro oui-subtype -> ../state/oui-subtype
            |   +--ro config
            |   +--ro state
            |     +--ro type?      int32

```

```

|   +--ro oui?      string
|   +--ro oui-subtype? string
|   +--ro value?    binary
+--ro capabilities
  +--ro capability* [name]
    +--ro name      -> ../state/name
  +--ro config
  +--ro state
    +--ro name?     identityref
    +--ro enabled?  boolean

```

module: openconfig-network-instance

```

+--rw network-instances
  +--rw network-instance* [name]
    +--rw name              -> ../config/name
    +--rw config
      | +--rw name?          string
      | +--rw type           identityref
      | +--rw description?   string
      | +--rw router-id?     openconfig-yang-types:dotted-quad
      | +--rw route-distinguisher? openconfig-network-instance-types:route-distinguisher
      | +--rw fallback-network-instance? network-instance-ref
      | +--rw ipi-oc-ni-augments:bridge-protocol? enumeration
    +--ro state
      | +--ro name?          string
      | +--ro type           identityref
      | +--ro description?   string
      | +--ro router-id?     openconfig-yang-types:dotted-quad
      | +--ro route-distinguisher? openconfig-network-instance-types:route-distinguisher
      | +--ro ipi-oc-ni-augments:bridge-protocol? enumeration
    +--rw fdb
      | +--rw config
      | | +--rw mac-learning?  boolean
      | | +--rw maximum-entries? uint16
      | +--ro state

```

```

| | +--ro mac-learning?    boolean
| | +--ro maximum-entries? uint16
| | +--rw mac-table
| | +--rw entries
| |   +--rw entry* [mac-address vlan]
| |     +--rw mac-address  -> ../config/mac-address
| |     +--rw vlan         -> ../config/vlan
| |     +--rw config
| |       +--rw mac-address? openconfig-yang-types:mac-address
| |       +--rw vlan?       -> ../../../../vlans/vlan/config/vlan-id
| +--ro l2rib
|   +--ro mac-table
|     +--ro entries
|       +--ro entry* [mac-address]
|         +--ro mac-address  -> ../state/mac-address
|         +--ro state
|           +--ro mac-address? openconfig-yang-types:mac-address
|           +--ro producers
|             +--ro producer* [producer]
|               +--ro producer  -> ../state/producer
|               +--ro state
|                 +--ro producer? enumeration
|     +--ro next-hops
|       +--ro next-hop* [index]
|         +--ro index  -> ../state/index
|         +--ro state
|           +--ro index? uint64
|   +--ro mac-ip-table
|     +--ro entries
|       +--ro entry* [mac-address host-ip]
|         +--ro mac-address  -> ../state/mac-address
|         +--ro host-ip     -> ../state/host-ip
|         +--ro state
|           +--ro mac-address? openconfig-yang-types:mac-address
|           +--ro vlan?       -> ../../../../vlans/vlan/config/vlan-id
|           +--ro evi?        oc-evpn-types:evi-id

```

```

|   |   | +--ro l2-vni?      oc-evpn-types:evi-id
|   |   | +--ro host-ip?     openconfig-inet-types:ip-address
|   |   | +--ro l3-vni?      oc-evpn-types:evi-id
|   |   +--ro producers
|   |       +--ro producer* [producer]
|   |           +--ro producer -> ../state/producer
|   |           +--ro state
|   |               +--ro producer? enumeration
|   +--ro next-hops
|       +--ro next-hop* [index]
|           +--ro index -> ../state/index
|           +--ro state
|               +--ro index? uint64
+--rw evpn
| +--rw evpn-instances
|   +--rw evpn-instance* [evi]
|       +--rw evi -> ../config/evi
|       +--rw config
|           | +--rw evi?      string
|           | +--rw encapsulation-type? identityref
|           +--ro state
|               +--ro evi?      string
|               +--ro encapsulation-type? identityref
|               +--ro service-type? identityref
|               +--ro multicast-group? openconfig-inet-types:ip-address
|               +--ro multicast-mask? openconfig-inet-types:ip-address
|               +--ro replication-mode? enumeration
|               +--ro control-word-enabled? boolean
+--rw encapsulation
| +--rw config
|   | +--rw encapsulation-type? identityref
|   | +--rw label-allocation-mode? identityref
|   +--ro state
|       +--ro encapsulation-type? identityref
|       +--ro label-allocation-mode? identityref
+--rw inter-instance-policies

```

```

| +--rw apply-policy
| | +--rw config
| | | +--rw import-policy* -> /openconfig-routing-policy:routing-policy/policy-definitions/policy-definition/name
| | | +--rw export-policy* -> /openconfig-routing-policy:routing-policy/policy-definitions/policy-definition/name
| | +--ro state
| |   +--ro import-policy* -> /openconfig-routing-policy:routing-policy/policy-definitions/policy-definition/name
| |   +--ro export-policy* -> /openconfig-routing-policy:routing-policy/policy-definitions/policy-definition/name
| +--rw import-export-policy
|   +--rw config
|   | +--rw export-route-target* union
|   | +--rw import-route-target* union
|   +--ro state
|     +--ro export-route-target* union
|     +--ro import-route-target* union
+--rw table-connections
| +--rw table-connection* [src-protocol dst-protocol address-family]
|   +--rw src-protocol -> ../config/src-protocol
|   +--rw dst-protocol -> ../config/dst-protocol
|   +--rw address-family -> ../config/address-family
|   +--rw config
|   | +--rw src-protocol? -> ../../../../tables/table/config/protocol
|   | +--rw address-family? -> ../../../../tables/table[protocol=current()../src-protocol]/config/address-
family
|   | +--rw dst-protocol? -> ../../../../tables/table/config/protocol
|   | +--rw import-policy* -> /openconfig-routing-policy:routing-policy/policy-definitions/policy-definition/
name
|   | +--rw default-import-policy? default-policy-type
|   | +--rw ipi-oc-ni-augments:dst-instance? string
|   +--ro state
|     +--ro src-protocol? -> ../../../../tables/table/config/protocol
|     +--ro address-family? -> ../../../../tables/table[protocol=current()../src-protocol]/config/address-family
|     +--ro dst-protocol? -> ../../../../tables/table/config/protocol
|     +--ro disable-metric-propagation? boolean
|     +--ro import-policy* -> /openconfig-routing-policy:routing-policy/policy-definitions/policy-definition/
name
|     +--ro default-import-policy? default-policy-type
+--rw interfaces

```

```

| +--rw interface* [id]
|   +--rw id      -> ../config/id
|   +--rw config
|     | +--rw id?      string
|     | +--rw interface?  -> /openconfig-interfaces:interfaces/interface/name
|     | +--rw subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()/../interface]/
subinterfaces/subinterface/index
|     +--ro state
|       +--ro id?      string
|       +--ro interface?  -> /openconfig-interfaces:interfaces/interface/name
|       +--ro subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()/../interface]/
subinterfaces/subinterface/index
+--rw tables
| +--rw table* [protocol address-family]
|   +--rw protocol      -> ../config/protocol
|   +--rw address-family -> ../config/address-family
|   +--rw config
|     | +--rw protocol?      -> ../../../../protocols/protocol/config/identifier
|     | +--rw address-family? identityref
|     +--ro state
|       +--ro protocol?      -> ../../../../protocols/protocol/config/identifier
|       +--ro address-family? identityref
+--rw connection-points
| +--rw connection-point* [connection-point-id]
|   +--rw connection-point-id -> ../config/connection-point-id
|   +--rw config
|     | +--rw connection-point-id? string
|     +--ro state
|       | +--ro connection-point-id? string
|   +--rw endpoints
|     +--rw endpoint* [endpoint-id]
|       +--rw endpoint-id -> ../config/endpoint-id
|       +--rw config
|         | +--rw endpoint-id? string
|         | +--rw precedence? uint16
|         | +--rw type?      identityref
|         +--ro state

```

```

|   | +--ro endpoint-id?  string
|   | +--ro precedence?  uint16
|   +--rw local
|   | +--rw config
|   | | +--rw interface?   -> /openconfig-interfaces:interfaces/interface/name
|   | | +--rw subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()/../interface]/
subinterfaces/subinterface/index
|   | +--ro state
|   |   +--ro interface?      -> /openconfig-interfaces:interfaces/interface/name
|   |   +--ro subinterface?   -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()/../
interface]/subinterfaces/subinterface/index
|   |   +--ro site-id?        uint16
|   |   +--ro site-label-block-offset?  uint16
|   |   +--ro site-label-block-size?  uint16
|   +--rw remote
|   | +--rw config
|   | | +--rw remote-system?      openconfig-inet-types:ip-address
|   | | +--rw virtual-circuit-identifier?  uint32
|   | +--ro state
|   |   +--ro remote-system?      openconfig-inet-types:ip-address
|   |   +--ro virtual-circuit-identifier?  uint32
|   +--rw vxlan
|   | +--ro endpoint-peers
|   | | +--ro endpoint-peer* [peer-address]
|   | |   +--ro peer-address -> ../state/peer-address
|   | |   +--ro state
|   | |     +--ro peer-address?  openconfig-inet-types:ip-address
|   | |     +--ro peer-state?    enumeration
|   | |     +--ro uptime?       openconfig-types:timeticks64
|   | |     +--ro control-plane-vnis?  string
|   | |     +--ro router-mac?    openconfig-yang-types:mac-address
|   | +--ro endpoint-vnis
|   |   +--ro endpoint-vni* [vni]
|   |   +--ro vni -> ../state/vni
|   |   +--ro state
|   |     +--ro vni?            oc-evpn-types:evi-id
|   |     +--ro multideestination-traffic?  union

```

```

|          +--ro learning-mode?      oc-evpn-types:learning-mode
|          +--ro vni-type?           enumeration
|          +--ro vni-state?          enumeration
|          +--ro svi-state?          enumeration
|          +--ro bridge-domain?      uint32
|          +--ro l3-vrf-name?        string
+--rw mpls
| +--rw global
| | +--rw config
| | | +--rw pw-encapsulation? identityref
| | | +--ro state
| | | +--ro pw-encapsulation? identityref
| | | +--rw interface-attributes
| | | +--rw interface* [interface-id]
| | |   +--rw interface-id  -> ../config/interface-id
| | |   +--rw config
| | |     | +--rw interface-id? openconfig-interfaces:interface-id
| | |     | +--rw mpls-enabled? boolean
| | |     | +--rw interface-ref
| | |     | +--rw config
| | |     +--rw interface?  -> /openconfig-interfaces:interfaces/interface/name
| | |     +--rw subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()/../interface]/
subinterfaces/subinterface/index
| | +--rw reserved-label-blocks
| |   +--rw reserved-label-block* [local-id]
| |     +--rw local-id  -> ../config/local-id
| |     +--rw config
| |       +--rw local-id? string
| +--rw te-global-attributes
| | +--rw srlgs
| | | +--rw srlg* [name]
| | |   +--rw name  -> ../config/name
| | |   +--rw config
| | |     | +--rw name? string
| | |     +--ro state
| | |     +--ro name? string
| | +--rw mpls-admin-groups

```

```

| | | +--rw admin-group* [admin-group-name]
| | |   +--rw admin-group-name  -> ../config/admin-group-name
| | |   +--rw config
| | |     | +--rw admin-group-name?  string
| | |     | +--rw bit-position?      uint32
| | |     +--ro state
| | |       +--ro admin-group-name?  string
| | |       +--ro bit-position?      uint32
| | +--rw te-lsp-timers
| |   +--rw config
| |     | +--rw reoptimize-timer?  uint16
| |     +--ro state
| |       +--ro reoptimize-timer?  uint16
| +--rw te-interface-attributes
| | +--rw interface* [interface-id]
| |   +--rw interface-id  -> ../config/interface-id
| |   +--rw config
| |     | +--rw interface-id?      openconfig-interfaces:interface-id
| |     | +--rw srlg-membership*  -> ../../../../te-global-attributes/srlgs/srlg/name
| |     | +--rw admin-group*      string
| |     +--ro state
| |       | +--ro interface-id?    openconfig-interfaces:interface-id
| |       | +--ro srlg-membership* -> ../../../../te-global-attributes/srlgs/srlg/name
| |       | +--ro admin-group*     string
| |     +--rw interface-ref
| |       +--rw config
| |         | +--rw interface?     -> /openconfig-interfaces:interfaces/interface/name
| |         | +--rw subinterface?  -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()../interface]/
subinterfaces/subinterface/index
| |         +--ro state
| |           +--ro interface?     -> /openconfig-interfaces:interfaces/interface/name
| |           +--ro subinterface?  -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()../interface]/
subinterfaces/subinterface/index
| +--rw signaling-protocols
| | +--rw rsvp-te
| | | +--rw sessions
| | | | +--ro session* [local-index]

```

```

| | | | +--ro local-index -> ../state/local-index
| | | | +--ro state
| | | |   +--ro local-index?      uint64
| | | |   +--ro source-address?   inet:ip-address
| | | |   +--ro destination-address? inet:ip-address
| | | |   +--ro tunnel-id?        uint16
| | | |   +--ro lsp-id?           uint16
| | | |   +--ro session-name?     string
| | | |   +--ro type?             identityref
| | | |   +--ro label-in?         oc-mplst:mpls-label
| | | |   +--ro label-out?        oc-mplst:mpls-label
| | | +--rw neighbors
| | | | +--ro neighbor* [address]
| | | | +--ro address -> ../state/address
| | | | +--ro state
| | | |   +--ro address?          inet:ip-address
| | | |   +--ro neighbor-status?  enumeration
| | | |   +--ro refresh-reduction? boolean
| | | +--rw global
| | | | +--rw graceful-restart
| | | | | +--rw config
| | | | | | +--rw enable?        boolean
| | | | | | +--rw restart-time?  uint32
| | | | | | +--rw recovery-time? uint32
| | | | | +--ro state
| | | | | | +--ro enable?        boolean
| | | | | | +--ro restart-time?  uint32
| | | | | | +--ro recovery-time? uint32
| | | | +--rw hellos
| | | | | +--rw config
| | | | | | +--rw hello-interval? uint16
| | | | | +--ro state
| | | | | | +--ro hello-interval? uint16
| | | | +--ro state
| | | | +--ro counters
| | | |   +--ro in-path-messages? yang:counter64

```

```

| | | | +--ro in-path-error-messages?      yang:counter64
| | | | +--ro in-path-tear-messages?       yang:counter64
| | | | +--ro in-reservation-messages?     yang:counter64
| | | | +--ro in-reservation-error-messages? yang:counter64
| | | | +--ro in-reservation-tear-messages? yang:counter64
| | | | +--ro in-hello-messages?           yang:counter64
| | | | +--ro in-srefresh-messages?        yang:counter64
| | | | +--ro in-ack-messages?             yang:counter64
| | | | +--ro out-path-messages?           yang:counter64
| | | | +--ro out-path-error-messages?     yang:counter64
| | | | +--ro out-path-tear-messages?      yang:counter64
| | | | +--ro out-reservation-messages?    yang:counter64
| | | | +--ro out-reservation-error-messages? yang:counter64
| | | | +--ro out-reservation-tear-messages? yang:counter64
| | | | +--ro out-hello-messages?          yang:counter64
| | | | +--ro out-srefresh-messages?       yang:counter64
| | | | +--ro out-ack-messages?            yang:counter64
| | | +--rw interface-attributes
| | | | +--rw interface* [interface-id]
| | | | +--rw interface-id  -> ../config/interface-id
| | | | +--rw config
| | | | | +--rw interface-id?          openconfig-interfaces:interface-id
| | | | | +--rw ipi-oc-ni-augments:enabled? boolean
| | | | +--ro state
| | | | | +--ro interface-id?          openconfig-interfaces:interface-id
| | | | | +--ro ipi-oc-ni-augments:enabled? boolean
| | | | +--rw interface-ref
| | | | | +--rw config
| | | | | | +--rw interface?  -> /openconfig-interfaces:interfaces/interface/name
| | | | | | +--rw subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()]/../interface]/
subinterfaces/subinterface/index
| | | | | | +--ro state
| | | | | | +--ro interface?  -> /openconfig-interfaces:interfaces/interface/name
| | | | | | +--ro subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()]/../interface]/
subinterfaces/subinterface/index
| | | | +--rw hellos
| | | | +--rw config

```

```

| | | | | +--rw hello-interval? uint16
| | | | +--ro state
| | | | +--ro hello-interval? uint16
| | | +--rw ipi-oc-ni-augments:config
| | | | +--rw ipi-oc-ni-augments:enabled? empty
| | | +--ro ipi-oc-ni-augments:state
| | | +--ro ipi-oc-ni-augments:enabled? empty
| | +--rw ldp
| | +--rw global
| | | +--rw config
| | | | +--rw lsr-id? openconfig-inet-types:ipv4-address
| | | | +--ro state
| | | | +--ro lsr-id? openconfig-inet-types:ipv4-address
| | | | +--rw graceful-restart
| | | | +--rw config
| | | | | +--rw reconnect-time? uint16
| | | | | +--rw recovery-time? uint16
| | | | | +--rw helper-enable? boolean
| | | | | +--ro state
| | | | | +--ro reconnect-time? uint16
| | | | | +--ro recovery-time? uint16
| | | | | +--ro helper-enable? boolean
| | | | +--rw authentication
| | | | +--rw config
| | | | | +--rw authentication-key? openconfig-types:routing-password
| | | | | +--ro state
| | | | | +--ro authentication-key? openconfig-types:routing-password
| | +--rw interface-attributes
| | | +--rw config
| | | | +--rw hello-holdtime? uint16
| | | | +--rw hello-interval? uint16
| | | | +--ro state
| | | | +--ro hello-holdtime? uint16
| | | | +--ro hello-interval? uint16
| | | +--rw interfaces
| | | +--rw interface* [interface-id]

```

```

| | |   +--rw interface-id    -> ../config/interface-id
| | |   +--rw config
| | |   | +--rw interface-id?  openconfig-interfaces:interface-id
| | |   | +--rw hello-holdtime? uint16
| | |   | +--rw hello-interval? uint16
| | |   +--ro state
| | |   | +--ro interface-id?  openconfig-interfaces:interface-id
| | |   | +--ro hello-holdtime? uint16
| | |   | +--ro hello-interval? uint16
| | |   +--rw interface-ref
| | |   | +--rw config
| | |   | | +--rw interface?   -> /openconfig-interfaces:interfaces/interface/name
| | |   | | +--rw subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()/../interface]/
subinterfaces/subinterface/index
| | |   | | +--ro state
| | |   | | +--ro interface?   -> /openconfig-interfaces:interfaces/interface/name
| | |   | | +--ro subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()/../interface]/
subinterfaces/subinterface/index
| | |   +--rw address-families
| | |   +--rw address-family* [afi-name]
| | |   +--rw afi-name    -> ../config/afi-name
| | |   +--rw config
| | |   | +--rw afi-name?  oc-ldp:mpls-ldp-afi
| | |   | +--rw enabled?   boolean
| | |   +--ro state
| | |   +--ro afi-name?   oc-ldp:mpls-ldp-afi
| | |   +--ro enabled?   boolean
| | +--rw targeted
| | | +--rw config
| | | | +--rw hello-holdtime? uint16
| | | | +--rw hello-interval? uint16
| | | +--ro state
| | | | +--ro hello-holdtime? uint16
| | | | +--ro hello-interval? uint16
| | | +--rw address-families
| | | +--rw address-family* [afi-name]
| | | +--rw afi-name    -> ../config/afi-name

```

```

| | | +--rw config
| | | | +--rw afi-name? oc-ldp:mpls-ldp-afi
| | | +--ro state
| | | | +--ro afi-name? oc-ldp:mpls-ldp-afi
| | | +--rw targets
| | |   +--rw target* [remote-address]
| | |     +--rw remote-address openconfig-inet-types:ipv4-address
| | |     +--rw config
| | |       | +--rw remote-address? openconfig-inet-types:ipv4-address
| | |       | +--rw local-address? openconfig-inet-types:ipv4-address
| | |       | +--rw hello-holdtime? uint16
| | |       | +--rw hello-interval? uint16
| | |       +--ro state
| | |         +--ro remote-address? openconfig-inet-types:ipv4-address
| | |         +--ro local-address? openconfig-inet-types:ipv4-address
| | |         +--ro hello-holdtime? uint16
| | |         +--ro hello-interval? uint16
| | +--rw neighbors
| | | +--rw neighbor* [lsr-id label-space-id]
| | |   +--rw lsr-id openconfig-inet-types:ipv4-address
| | |   +--rw label-space-id -> ../config/label-space-id
| | |   +--rw config
| | |     | +--rw lsr-id? openconfig-inet-types:ipv4-address
| | |     | +--rw label-space-id? uint16
| | |     +--ro state
| | |       | +--ro lsr-id? openconfig-inet-types:ipv4-address
| | |       | +--ro label-space-id? uint16
| | |       | +--ro session-state? enumeration
| | |       | +--ro negotiated-label-advertisement-mode? label-advertisement-mode
| | |       +--ro hello-adjacencies
| | |         | +--ro hello-adjacency* [remote-address local-address]
| | |         |   +--ro remote-address openconfig-inet-types:ipv4-address
| | |         |   +--ro local-address openconfig-inet-types:ipv4-address
| | |         |   +--ro state
| | |         | | +--ro remote-address? openconfig-inet-types:ipv4-address
| | |         | | +--ro local-address? openconfig-inet-types:ipv4-address

```



```

| | | | | +--ro adjacency-type? oc-ldp:mpls-ldp-adjacency-type
| | | | +--ro interface-ref
| | | | +--ro state
| | | | +--ro interface? -> /openconfig-interfaces:interfaces/interface/name
| | | | +--ro subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()/../
interface]/subinterfaces/subinterface/index
| | | +--rw authentication
| | | +--rw config
| | | | +--rw authentication-key? openconfig-types:routing-password
| | | +--ro state
| | | +--ro authentication-key? openconfig-types:routing-password
| | +--rw ipi-oc-ni-augments:config
| | | +--rw ipi-oc-ni-augments:enabled? boolean
| | +--ro ipi-oc-ni-augments:state
| | +--ro ipi-oc-ni-augments:enabled? boolean
| +--rw lsps
| +--rw constrained-path
| +--rw named-explicit-paths
| | +--rw named-explicit-path* [name]
| | | +--rw name -> ../config/name
| | | +--rw config
| | | | +--rw name? string
| | | +--ro state
| | | | +--ro name? string
| | | +--rw explicit-route-objects
| | | +--rw explicit-route-object* [index]
| | | +--rw index -> ../config/index
| | | +--rw config
| | | | +--rw address? openconfig-inet-types:ipv4-address
| | | | +--rw hop-type? mpls-hop-type
| | | | +--rw index? uint8
| | | +--ro state
| | | +--ro address? openconfig-inet-types:ipv4-address
| | | +--ro hop-type? mpls-hop-type
| | | +--ro index? uint8
| +--rw tunnels
| +--rw tunnel* [name]

```

```

|      +--rw name          -> ../config/name
|
|      +--rw config
|      |
|      | +--rw name?          string
|      | +--rw type?          identityref
|      | +--rw signaling-protocol? identityref
|      | +--rw description?    string
|      | +--rw admin-status?   identityref
|      | +--rw metric-type?    identityref
|      | +--rw metric?         int32
|      | +--rw shortcut-eligible? boolean
|      | +--rw protection-style-requested? identityref
|      | +--rw source?         openconfig-inet-types:ipv4-address
|      | +--rw ipi-oc-ni-augments:protection-role? identityref
|
|      +--ro state
|      |
|      | +--ro name?          string
|      | +--ro type?          identityref
|      | +--ro signaling-protocol? identityref
|      | +--ro description?    string
|      | +--ro admin-status?   identityref
|      | +--ro metric-type?    identityref
|      | +--ro metric?         int32
|      | +--ro shortcut-eligible? boolean
|      | +--ro protection-style-requested? identityref
|      | +--ro source?         openconfig-inet-types:ipv4-address
|      | +--ro role?           identityref
|      | +--ro ipi-oc-ni-augments:protection-role? identityref
|
|      +--rw bandwidth
|      |
|      | +--rw config
|      | |
|      | | +--rw specification-type? te-bandwidth-type
|      | | +--rw set-bandwidth?    oc-mplst:bandwidth-kbps
|      | |
|      | | +--ro state
|      | | |
|      | | | +--ro specification-type? te-bandwidth-type
|      | | | +--ro set-bandwidth?    oc-mplst:bandwidth-kbps
|      | | | +--ro signaled-bandwidth? oc-mplst:bandwidth-kbps
|      | |
|      | | +--rw auto-bandwidth
|      | |
|      | | +--rw config

```

```

|   | | +--rw min-bw?      oc-mplst:bandwidth-kbps
|   | | +--rw max-bw?      oc-mplst:bandwidth-kbps
|   | | +--rw adjust-interval? uint32
|   | +--ro state
|   | | +--ro min-bw?      oc-mplst:bandwidth-kbps
|   | | +--ro max-bw?      oc-mplst:bandwidth-kbps
|   | | +--ro adjust-interval? uint32
|   | | +--ro interval-high-bw? oc-mplst:bandwidth-kbps
|   | +--rw overflow
|   | | +--rw config
|   | | | +--rw overflow-threshold? openconfig-types:percentage
|   | | | +--rw trigger-event-count? uint16
|   | | +--ro state
|   | | | +--ro overflow-threshold? openconfig-types:percentage
|   | | | +--ro trigger-event-count? uint16
|   | +--rw underflow
|   | | +--rw config
|   | | | +--rw underflow-threshold? openconfig-types:percentage
|   | | | +--rw trigger-event-count? uint16
|   | | +--ro state
|   | | | +--ro underflow-threshold? openconfig-types:percentage
|   | | | +--ro trigger-event-count? uint16
|   +--rw p2p-tunnel-attributes
|   | +--rw config
|   | | +--rw destination? openconfig-inet-types:ipv4-address
|   | +--ro state
|   | | +--ro destination? openconfig-inet-types:ipv4-address
|   +--rw p2p-primary-path
|   | +--rw p2p-primary-path* [name]
|   | | +--rw name          -> ../config/name
|   | | +--rw config
|   | | | +--rw name?       string
|   | | | +--rw path-computation-method? identityref
|   | | | +--rw use-cspf?    boolean
|   | | | +--rw explicit-path-name? -> ../../../../named-explicit-paths/named-explicit-path/config/
name
|   | | +--rw setup-priority? uint8

```

```

|         | | +--rw hold-priority?      uint8
|         | | +--rw retry-timer?        uint16
|         | | +--ro state
|         | | +--ro name?                string
|         | | +--ro path-computation-method? identityref
|         | | +--ro use-cspf?            boolean
|         | | +--ro explicit-path-name?  -> ../../../../named-explicit-paths/named-explicit-path/config/
name
|         | | +--ro setup-priority?      uint8
|         | | +--ro hold-priority?      uint8
|         | | +--ro retry-timer?        uint16
|         | | +--ro associated-rsvp-sessions* -> ../../../../signaling-protocols/rsvp-te/sessions/session/
local-index
|         | +--rw path-metric-bound-constraints
|         | | +--rw path-metric-bound-constraint* [type]
|         | | | +--rw type -> ../config/type
|         | | | +--rw config
|         | | | | +--rw type?          identityref
|         | | | | +--rw metric-upper-bound? uint16
|         | | | +--ro state
|         | | | +--ro type?          identityref
|         | | | +--ro metric-upper-bound? uint16
|         | | +--rw admin-groups
|         | | +--rw config
|         | | +--rw exclude-group* -> ../../../../te-global-attributes/mpls-admin-groups/admin-
group/admin-group-name
|         | | +--rw include-all-group* -> ../../../../te-global-attributes/mpls-admin-groups/admin-
group/admin-group-name
|         | | +--rw include-any-group* -> ../../../../te-global-attributes/mpls-admin-groups/admin-
group/admin-group-name
|         | | +--ro state
|         | | +--ro exclude-group* -> ../../../../te-global-attributes/mpls-admin-groups/admin-
group/admin-group-name
|         | | +--ro include-all-group* -> ../../../../te-global-attributes/mpls-admin-groups/admin-
group/admin-group-name
|         | | +--ro include-any-group* -> ../../../../te-global-attributes/mpls-admin-groups/admin-
group/admin-group-name
|         | +--rw p2p-secondary-paths
|         | +--rw p2p-secondary-path* [name]

```

```

|           +--rw name                -> ../config/name
|           +--rw config
|           | +--rw name?              string
|           | +--rw path-computation-method? identityref
|           | +--rw use-cspf?          boolean
|           | +--rw explicit-path-name? -> ../../../../named-explicit-paths/named-explicit-path/config/
name
|           | +--rw setup-priority?    uint8
|           | +--rw hold-priority?     uint8
|           | +--rw retry-timer?       uint16
|           +--ro state
|           | +--ro name?              string
|           | +--ro path-computation-method? identityref
|           | +--ro use-cspf?          boolean
|           | +--ro explicit-path-name? -> ../../../../named-explicit-paths/named-explicit-path/config/
name
|           | +--ro setup-priority?    uint8
|           | +--ro hold-priority?     uint8
|           | +--ro retry-timer?       uint16
|           | +--ro associated-rsvp-sessions* -> ../../../../signaling-protocols/rsvp-te/sessions/session/
local-index
|           +--rw path-metric-bound-constraints
|           | +--rw path-metric-bound-constraint* [type]
|           | | +--rw type -> ../config/type
|           | | +--rw config
|           | | | +--rw type?          identityref
|           | | | +--rw metric-upper-bound? uint16
|           | | +--ro state
|           | |   +--ro type?          identityref
|           | |   +--ro metric-upper-bound? uint16
|           +--rw admin-groups
|           +--rw config
|           | +--rw exclude-group* -> ../../../../te-global-attributes/mpls-admin-groups/admin-
group/admin-group-name
|           | +--rw include-all-group* -> ../../../../te-global-attributes/mpls-admin-groups/admin-
group/admin-group-name
|           | +--rw include-any-group* -> ../../../../te-global-attributes/mpls-admin-groups/admin-
group/admin-group-name

```

```

|           +--ro state
|           +--ro exclude-group*  -> ../global-attributes/mpls-admin-groups/admin-
group/admin-group-name
|           +--ro include-all-group* -> ../global-attributes/mpls-admin-groups/admin-
group/admin-group-name
|           +--ro include-any-group* -> ../global-attributes/mpls-admin-groups/admin-
group/admin-group-name
+--rw vlans
| +--rw vlan* [vlan-id]
|   +--rw vlan-id  -> ../config/vlan-id
|   +--rw config
|   | +--rw vlan-id?  oc-vlan-types:vlan-id
|   | +--rw name?    string
|   | +--rw status?  enumeration
|   +--ro state
|   | +--ro vlan-id?  oc-vlan-types:vlan-id
|   | +--ro name?    string
|   | +--ro status?  enumeration
|   +--rw members
|   | +--ro member* []
|   | +--ro state
|   | +--ro interface?  base-interface-ref
+--rw protocols
+--rw protocol* [identifier name]
+--rw identifier  -> ../config/identifier
+--rw name        -> ../config/name
+--rw config
| +--rw identifier?  identityref
| +--rw name?       string
| +--rw enabled?    boolean
| +--rw default-metric? uint32
+--ro state
| +--ro identifier?  identityref
| +--ro name?       string
| +--ro enabled?    boolean
| +--ro default-metric? uint32
+--rw static-routes

```

```

| +--rw static* [prefix]
|   +--rw prefix    -> ../config/prefix
|   +--rw config
|     | +--rw prefix?    inet:ip-prefix
|     | +--rw set-tag?   oc-pt:tag-type
|     | +--rw description? string
|     +--ro state
|       | +--ro prefix?    inet:ip-prefix
|       | +--ro set-tag?   oc-pt:tag-type
|       | +--ro description? string
|       +--rw next-hops
|         +--rw next-hop* [index]
|           +--rw index    -> ../config/index
|           +--rw config
|             | +--rw index?    string
|             | +--rw next-hop? union
|             | +--rw metric?   uint32
|             +--ro state
|               | +--ro index?    string
|               | +--ro next-hop? union
|               | +--ro recurse?  boolean
|               | +--ro metric?   uint32
|               | +--ro preference? uint32
|               +--rw enable-bfd
|                 | +--rw config
|                 | | +--rw enabled? boolean
|                 | +--ro state
|                 |   +--ro enabled? boolean
|                 +--rw interface-ref
|                   +--rw config
|                     | +--rw interface?    -> /openconfig-interfaces:interfaces/interface/name
|                     | +--rw subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()/../interface]/
subinterfaces/subinterface/index
|                       +--ro state
|                       +--ro interface?    -> /openconfig-interfaces:interfaces/interface/name
|                       +--ro subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()/../interface]/
subinterfaces/subinterface/index

```

```

+--rw bgp
| +--rw global
| | +--rw config
| | | +--rw as      openconfig-inet-types:as-number
| | | +--rw router-id? openconfig-yang-types:dotted-quad
| | +--ro state
| | | +--ro as      openconfig-inet-types:as-number
| | | +--ro router-id? openconfig-yang-types:dotted-quad
| | | +--ro total-prefixes? uint32
| | +--rw confederation
| | | +--rw config
| | | | +--rw identifier? openconfig-inet-types:as-number
| | | | +--rw member-as* openconfig-inet-types:as-number
| | | +--ro state
| | |   +--ro identifier? openconfig-inet-types:as-number
| | |   +--ro member-as* openconfig-inet-types:as-number
| | +--rw graceful-restart
| | | +--rw config
| | | | +--rw enabled?      boolean
| | | | +--rw restart-time? uint16
| | | | +--rw stale-routes-time? uint16
| | | | +--rw helper-only?  boolean
| | | +--ro state
| | |   +--ro enabled?      boolean
| | |   +--ro restart-time? uint16
| | |   +--ro stale-routes-time? uint16
| | |   +--ro helper-only?  boolean
| | +--rw route-selection-options
| | | +--rw config
| | | | +--rw always-compare-med?      boolean
| | | | +--rw ignore-as-path-length?  boolean
| | | | +--rw external-compare-router-id? boolean
| | | | +--rw enable-aigp?            boolean
| | | +--ro state
| | |   +--ro always-compare-med?      boolean
| | |   +--ro ignore-as-path-length?  boolean

```



```

| | | +--ro external-compare-router-id? boolean
| | | +--ro enable-aigp?          boolean
| | +--rw afi-safis
| |   +--rw afi-safi* [afi-safi-name]
| |     +--rw afi-safi-name      -> ../config/afi-safi-name
| |     +--rw config
| |       | +--rw afi-safi-name? identityref
| |       +--ro state
| |         | +--ro afi-safi-name? identityref
| |         | +--ro total-prefixes? uint32
| |         +--rw use-multiple-paths
| |           | +--rw config
| |           | +--rw ebgp
| |           | | +--rw config
| |           | | | +--rw maximum-paths? uint32
| |           | | | +--ro state
| |           | | |   +--ro maximum-paths? uint32
| |           | | |   +--rw ibgp
| |           | | |     +--rw config
| |           | | |       | +--rw maximum-paths? uint32
| |           | | |       +--ro state
| |           | | |         +--ro maximum-paths? uint32
| |           +--rw add-paths
| |             +--rw config
| |               | +--rw receive? boolean
| |               | +--rw send?    boolean
| |               | +--rw send-max? uint8
| |               +--ro state
| |                 +--ro receive? boolean
| |                 +--ro send?    boolean
| |                 +--ro send-max? uint8
| +--rw neighbors
| | +--rw neighbor* [neighbor-address]
| |   +--rw neighbor-address -> ../config/neighbor-address
| |   +--rw config
| |     | +--rw peer-group?      -> ../../../../peer-groups/peer-group/peer-group-name

```

```

| | | +--rw neighbor-address?  openconfig-inet-types:ip-address
| | | +--rw enabled?           boolean
| | | +--rw peer-as?           openconfig-inet-types:as-number
| | | +--rw local-as?          openconfig-inet-types:as-number
| | | +--rw auth-password?     openconfig-types:routing-password
| | | +--rw remove-private-as? oc-bgp-types:remove-private-as-option
| | | +--rw description?       string
| | +--ro state
| | | +--ro peer-group?        -> ../../../../peer-groups/peer-group/peer-group-name
| | | +--ro neighbor-address?  openconfig-inet-types:ip-address
| | | +--ro enabled?           boolean
| | | +--ro peer-as?           openconfig-inet-types:as-number
| | | +--ro local-as?          openconfig-inet-types:as-number
| | | +--ro auth-password?     openconfig-types:routing-password
| | | +--ro remove-private-as? oc-bgp-types:remove-private-as-option
| | | +--ro description?       string
| | +--rw timers
| | | +--rw config
| | | | +--rw connect-retry?    uint16
| | | | +--rw hold-time?        uint16
| | | | +--rw keepalive-interval? uint16
| | | | +--rw minimum-advertisement-interval? uint16
| | | | +--ro state
| | | | +--ro connect-retry?    uint16
| | | | +--ro hold-time?        uint16
| | | | +--ro keepalive-interval? uint16
| | | | +--ro minimum-advertisement-interval? uint16
| | +--rw transport
| | | +--rw config
| | | | +--rw passive-mode?    boolean
| | | | +--rw local-address?   union
| | | | +--ro state
| | | | +--ro passive-mode?    boolean
| | | | +--ro local-address?   union
| | | | +--ro local-port?      openconfig-inet-types:port-number
| | | | +--ro remote-address?  openconfig-inet-types:ip-address

```

```

| | | +--ro remote-port?   openconfig-inet-types:port-number
| | +--rw ebgp-multihop
| | | +--rw config
| | | | +--rw enabled?     boolean
| | | | +--rw multihop-ttl? uint8
| | | +--ro state
| | | | +--ro enabled?     boolean
| | | | +--ro multihop-ttl? uint8
| | +--rw route-reflector
| | | +--rw config
| | | | +--rw route-reflector-client? boolean
| | | | +--ro state
| | | | +--ro route-reflector-client? boolean
| | +--rw afi-safis
| | | +--rw afi-safi* [afi-safi-name]
| | | | +--rw afi-safi-name      -> ../config/afi-safi-name
| | | | +--rw config
| | | | | +--rw afi-safi-name?  identityref
| | | | | +--rw enabled?       boolean
| | | | | +--ro state
| | | | | +--ro afi-safi-name?  identityref
| | | | | +--ro enabled?       boolean
| | | | | +--ro prefixes
| | | | | | +--ro sent?        uint32
| | | | | | +--ro installed?   uint32
| | | | +--rw graceful-restart
| | | | | +--rw config
| | | | | | +--rw enabled?     boolean
| | | | | | +--ro state
| | | | | | | +--ro enabled?   boolean
| | | | | | | +--ro received?  boolean
| | | | | | | +--ro advertised? boolean
| | | | +--rw add-paths
| | | | | +--rw config
| | | | | | +--rw receive?     boolean
| | | | | | +--rw send?       boolean

```

```

    | | | | +--rw send-max?  uint8
    | | | | +--ro state
    | | | |   +--ro receive?  boolean
    | | | |   +--ro send?     boolean
    | | | |   +--ro send-max? uint8
    | | | +--rw apply-policy
    | | | | +--rw config
name | | | | +--rw import-policy* -> /openconfig-routing-policy:routing-policy/policy-definitions/policy-definition/
name | | | | +--rw export-policy* -> /openconfig-routing-policy:routing-policy/policy-definitions/policy-definition/
    | | | | +--ro state
name | | | | +--ro import-policy* -> /openconfig-routing-policy:routing-policy/policy-definitions/policy-definition/
name | | | | +--ro export-policy* -> /openconfig-routing-policy:routing-policy/policy-definitions/policy-definition/
    | | | +--rw ipv4-unicast
    | | | | +--rw prefix-limit
    | | | | +--rw config
    | | | | | +--rw max-prefixes?      uint32
    | | | | | +--rw prevent-teardown?  boolean
    | | | | | +--rw warning-threshold-pct? openconfig-types:percentage
    | | | | | +--ro state
    | | | | | +--ro max-prefixes?      uint32
    | | | | | +--ro prevent-teardown?  boolean
    | | | | | +--ro warning-threshold-pct? openconfig-types:percentage
    | | | | +--rw config
    | | | | | +--rw send-default-route? boolean
    | | | | | +--ro state
    | | | | | +--ro send-default-route? boolean
    | | | +--rw ipv6-unicast
    | | | | +--rw prefix-limit
    | | | | +--rw config
    | | | | | +--rw max-prefixes?      uint32
    | | | | | +--rw prevent-teardown?  boolean
    | | | | | +--rw warning-threshold-pct? openconfig-types:percentage
    | | | | | +--ro state
    | | | | | +--ro max-prefixes?      uint32

```

```

| | | | | +--ro prevent-teardown?    boolean
| | | | | +--ro warning-threshold-pct? openconfig-types:percentage
| | | | | +--rw config
| | | | | +--rw send-default-route?  boolean
| | | | | +--ro state
| | | | | +--ro send-default-route?  boolean
| | | | | +--rw ipv4-labeled-unicast
| | | | | +--rw prefix-limit
| | | | | +--rw config
| | | | | | +--rw max-prefixes?      uint32
| | | | | | +--rw prevent-teardown?  boolean
| | | | | | +--rw warning-threshold-pct? openconfig-types:percentage
| | | | | +--ro state
| | | | |   +--ro max-prefixes?      uint32
| | | | |   +--ro prevent-teardown?  boolean
| | | | |   +--ro warning-threshold-pct? openconfig-types:percentage
| | | | | +--rw ipv6-labeled-unicast
| | | | | +--rw prefix-limit
| | | | | +--rw config
| | | | | | +--rw max-prefixes?      uint32
| | | | | | +--rw prevent-teardown?  boolean
| | | | | | +--rw warning-threshold-pct? openconfig-types:percentage
| | | | | +--ro state
| | | | |   +--ro max-prefixes?      uint32
| | | | |   +--ro prevent-teardown?  boolean
| | | | |   +--ro warning-threshold-pct? openconfig-types:percentage
| | | | | +--rw l3vpn-ipv4-unicast
| | | | | +--rw prefix-limit
| | | | | +--rw config
| | | | | | +--rw max-prefixes?      uint32
| | | | | | +--rw prevent-teardown?  boolean
| | | | | | +--rw warning-threshold-pct? openconfig-types:percentage
| | | | | +--ro state
| | | | |   +--ro max-prefixes?      uint32
| | | | |   +--ro prevent-teardown?  boolean
| | | | |   +--ro warning-threshold-pct? openconfig-types:percentage

```

```

| | | +--rw l3vpn-ipv6-unicast
| | | | +--rw prefix-limit
| | | | +--rw config
| | | | | +--rw max-prefixes?      uint32
| | | | | +--rw prevent-teardown?  boolean
| | | | | +--rw warning-threshold-pct? openconfig-types:percentage
| | | | +--ro state
| | | |   +--ro max-prefixes?      uint32
| | | |   +--ro prevent-teardown?  boolean
| | | |   +--ro warning-threshold-pct? openconfig-types:percentage
| | | +--rw l2vpn-vpls
| | | | +--rw prefix-limit
| | | | +--rw config
| | | | | +--rw max-prefixes?      uint32
| | | | | +--rw prevent-teardown?  boolean
| | | | | +--rw warning-threshold-pct? openconfig-types:percentage
| | | | +--ro state
| | | |   +--ro max-prefixes?      uint32
| | | |   +--ro prevent-teardown?  boolean
| | | |   +--ro warning-threshold-pct? openconfig-types:percentage
| | | +--rw l2vpn-evpn
| | | | +--rw prefix-limit
| | | | +--rw config
| | | | | +--rw max-prefixes?      uint32
| | | | | +--rw prevent-teardown?  boolean
| | | | | +--rw warning-threshold-pct? openconfig-types:percentage
| | | | +--ro state
| | | |   +--ro max-prefixes?      uint32
| | | |   +--ro prevent-teardown?  boolean
| | | |   +--ro warning-threshold-pct? openconfig-types:percentage
| | +--rw enable-bfd
| | | +--rw config
| | | | +--rw enabled?  boolean
| | | +--ro state
| | | | +--ro enabled?  boolean
| +--rw peer-groups

```

```

| | +--rw peer-group* [peer-group-name]
| |   +--rw peer-group-name  -> ../config/peer-group-name
| |   +--rw config
| |     +--rw peer-group-name?  string
| |     +--rw peer-as?          openconfig-inet-types:as-number
| |     +--rw local-as?         openconfig-inet-types:as-number
| |     +--rw auth-password?    openconfig-types:routing-password
| |     +--rw description?      string
| |   +--ro state
| |     +--ro peer-group-name?  string
| |     +--ro peer-as?          openconfig-inet-types:as-number
| |     +--ro local-as?         openconfig-inet-types:as-number
| |     +--ro auth-password?    openconfig-types:routing-password
| |     +--ro description?      string
| |   +--rw timers
| |     +--rw config
| |       +--rw connect-retry?      uint16
| |       +--rw hold-time?          uint16
| |       +--rw keepalive-interval? uint16
| |       +--rw minimum-advertisement-interval? uint16
| |     +--ro state
| |       +--ro connect-retry?      uint16
| |       +--ro hold-time?          uint16
| |       +--ro keepalive-interval? uint16
| |       +--ro minimum-advertisement-interval? uint16
| |   +--rw transport
| |     +--rw config
| |       +--rw passive-mode?  boolean
| |       +--rw local-address? union
| |     +--ro state
| |       +--ro passive-mode?  boolean
| |       +--ro local-address? union
| |   +--rw ebgp-multihop
| |     +--rw config
| |       +--rw enabled?        boolean
| |       +--rw multihop-ttl?   uint8

```

```

| | | +--ro state
| | |   +--ro enabled?    boolean
| | |   +--ro multihop-ttl? uint8
| | +--rw route-reflector
| | | +--rw config
| | | | +--rw route-reflector-client? boolean
| | | | +--ro state
| | | |   +--ro route-reflector-client? boolean
| | +--rw afi-safis
| | | +--rw afi-safi* [afi-safi-name]
| | | | +--rw afi-safi-name      -> ../config/afi-safi-name
| | | | +--rw config
| | | | | +--rw afi-safi-name? identityref
| | | | | +--rw enabled?    boolean
| | | | | +--ro state
| | | | |   +--ro afi-safi-name? identityref
| | | | |   +--ro enabled?    boolean
| | | | +--rw apply-policy
| | | | | +--rw config
| | | | | +--rw import-policy* -> /openconfig-routing-policy:routing-policy/policy-definitions/policy-definition/
name
| | | | | +--rw export-policy* -> /openconfig-routing-policy:routing-policy/policy-definitions/policy-definition/
name
| | | | | +--ro state
| | | | | +--ro import-policy* -> /openconfig-routing-policy:routing-policy/policy-definitions/policy-definition/
name
| | | | | +--ro export-policy* -> /openconfig-routing-policy:routing-policy/policy-definitions/policy-definition/
name
| | | | +--rw ipv4-unicast
| | | | | +--rw prefix-limit
| | | | | +--rw config
| | | | | | +--rw max-prefixes?    uint32
| | | | | | +--rw prevent-teardown? boolean
| | | | | | +--rw warning-threshold-pct? openconfig-types:percentage
| | | | | +--ro state
| | | | | | +--ro max-prefixes?    uint32
| | | | | | +--ro prevent-teardown? boolean
| | | | | | +--ro warning-threshold-pct? openconfig-types:percentage

```



```

| | | | +--rw config
| | | | | +--rw send-default-route? boolean
| | | | | +--ro state
| | | | |   +--ro send-default-route? boolean
| | | | +--rw ipv6-unicast
| | | | | +--rw prefix-limit
| | | | | +--rw config
| | | | | | +--rw max-prefixes? uint32
| | | | | | +--rw prevent-teardown? boolean
| | | | | | +--rw warning-threshold-pct? openconfig-types:percentage
| | | | | | +--ro state
| | | | | |   +--ro max-prefixes? uint32
| | | | | |   +--ro prevent-teardown? boolean
| | | | | |   +--ro warning-threshold-pct? openconfig-types:percentage
| | | | | +--rw config
| | | | | | +--rw send-default-route? boolean
| | | | | | +--ro state
| | | | | |   +--ro send-default-route? boolean
| | | | +--rw ipv4-labeled-unicast
| | | | | +--rw prefix-limit
| | | | | +--rw config
| | | | | | +--rw max-prefixes? uint32
| | | | | | +--rw prevent-teardown? boolean
| | | | | | +--rw warning-threshold-pct? openconfig-types:percentage
| | | | | | +--ro state
| | | | | |   +--ro max-prefixes? uint32
| | | | | |   +--ro prevent-teardown? boolean
| | | | | |   +--ro warning-threshold-pct? openconfig-types:percentage
| | | | +--rw ipv6-labeled-unicast
| | | | | +--rw prefix-limit
| | | | | +--rw config
| | | | | | +--rw max-prefixes? uint32
| | | | | | +--rw prevent-teardown? boolean
| | | | | | +--rw warning-threshold-pct? openconfig-types:percentage
| | | | | | +--ro state
| | | | | |   +--ro max-prefixes? uint32

```

```

| | | |   +--ro prevent-teardown?    boolean
| | | |   +--ro warning-threshold-pct? openconfig-types:percentage
| | | | +--rw l3vpn-ipv4-unicast
| | | | +--rw prefix-limit
| | | | +--rw config
| | | | | +--rw max-prefixes?        uint32
| | | | | +--rw prevent-teardown?    boolean
| | | | | +--rw warning-threshold-pct? openconfig-types:percentage
| | | | +--ro state
| | | |   +--ro max-prefixes?        uint32
| | | |   +--ro prevent-teardown?    boolean
| | | |   +--ro warning-threshold-pct? openconfig-types:percentage
| | | | +--rw l3vpn-ipv6-unicast
| | | | +--rw prefix-limit
| | | | +--rw config
| | | | | +--rw max-prefixes?        uint32
| | | | | +--rw prevent-teardown?    boolean
| | | | | +--rw warning-threshold-pct? openconfig-types:percentage
| | | | +--ro state
| | | |   +--ro max-prefixes?        uint32
| | | |   +--ro prevent-teardown?    boolean
| | | |   +--ro warning-threshold-pct? openconfig-types:percentage
| | | | +--rw l2vpn-vpls
| | | | +--rw prefix-limit
| | | | +--rw config
| | | | | +--rw max-prefixes?        uint32
| | | | | +--rw prevent-teardown?    boolean
| | | | | +--rw warning-threshold-pct? openconfig-types:percentage
| | | | +--ro state
| | | |   +--ro max-prefixes?        uint32
| | | |   +--ro prevent-teardown?    boolean
| | | |   +--ro warning-threshold-pct? openconfig-types:percentage
| | | | +--rw l2vpn-evpn
| | | |   +--rw prefix-limit
| | | |   +--rw config
| | | | | +--rw max-prefixes?        uint32

```

```

| | | | +--rw prevent-teardown?    boolean
| | | | +--rw warning-threshold-pct? openconfig-types:percentage
| | | | +--ro state
| | | | +--ro max-prefixes?        uint32
| | | | +--ro prevent-teardown?    boolean
| | | | +--ro warning-threshold-pct? openconfig-types:percentage
| | +--rw enable-bfd
| | +--rw config
| | | +--rw enabled?  boolean
| | | +--ro state
| | | +--ro enabled?  boolean
| +--ro rib
| +--ro afi-safis
| +--ro afi-safi* [afi-safi-name]
| +--ro afi-safi-name -> ../state/afi-safi-name
| +--ro state
| | +--ro afi-safi-name? identityref
| +--ro ipv4-unicast
| | +--ro loc-rib
| | | +--ro routes
| | | +--ro route* [prefix origin path-id]
| | | +--ro prefix -> ../state/prefix
| | | +--ro origin -> ../state/origin
| | | +--ro path-id -> ../state/path-id
| | | +--ro state
| | | +--ro prefix?    openconfig-inet-types:ipv4-prefix
| | | +--ro origin?    union
| | | +--ro path-id?    uint32
| | | +--ro last-modified? openconfig-types:timeticks64
| | | +--ro valid-route? boolean
| | +--ro neighbors
| | +--ro neighbor* [neighbor-address]
| | +--ro neighbor-address -> ../state/neighbor-address
| | +--ro state
| | | +--ro neighbor-address? openconfig-inet-types:ip-address
| | +--ro adj-rib-in-post

```

```

|      |      | +--ro routes
|      |      |   +--ro route* [prefix path-id]
|      |      |     +--ro prefix   -> ../state/prefix
|      |      |     +--ro path-id  -> ../state/path-id
|      |      |     +--ro state
|      |      |       +--ro prefix?    openconfig-inet-types:ipv4-prefix
|      |      |       +--ro path-id?   uint32
|      |      |       +--ro last-modified? openconfig-types:timeticks64
|      |      |       +--ro valid-route? boolean
|      |      +--ro adj-rib-out-post
|      |      +--ro routes
|      |      +--ro route* [prefix path-id]
|      |      +--ro prefix   -> ../state/prefix
|      |      +--ro path-id  -> ../state/path-id
|      |      +--ro state
|      |      +--ro prefix?    openconfig-inet-types:ipv4-prefix
|      |      +--ro path-id?   uint32
|      |      +--ro last-modified? openconfig-types:timeticks64
|      |      +--ro valid-route? boolean
|      +--ro ipv6-unicast
|      +--ro loc-rib
|      | +--ro routes
|      |   +--ro route* [prefix origin path-id]
|      |   +--ro prefix   -> ../state/prefix
|      |   +--ro origin   -> ../state/origin
|      |   +--ro path-id  -> ../state/path-id
|      |   +--ro state
|      |     +--ro prefix?    openconfig-inet-types:ipv6-prefix
|      |     +--ro origin?    union
|      |     +--ro path-id?   uint32
|      |     +--ro last-modified? openconfig-types:timeticks64
|      |     +--ro valid-route? boolean
|      +--ro neighbors
|      +--ro neighbor* [neighbor-address]
|      +--ro neighbor-address -> ../state/neighbor-address
|      +--ro state

```

```

|           | +--ro neighbor-address?  openconfig-inet-types:ip-address
|           +--ro adj-rib-in-post
|           | +--ro routes
|           |   +--ro route* [prefix path-id]
|           |     +--ro prefix  -> ../state/prefix
|           |     +--ro path-id  -> ../state/path-id
|           |     +--ro state
|           |       +--ro prefix?      openconfig-inet-types:ipv6-prefix
|           |       +--ro path-id?      uint32
|           |       +--ro last-modified? openconfig-types:timeticks64
|           |       +--ro valid-route?  boolean
|           +--ro adj-rib-out-post
|           +--ro routes
|           | +--ro route* [prefix path-id]
|           |   +--ro prefix  -> ../state/prefix
|           |   +--ro path-id  -> ../state/path-id
|           |   +--ro state
|           |     +--ro prefix?      openconfig-inet-types:ipv6-prefix
|           |     +--ro path-id?      uint32
|           |     +--ro last-modified? openconfig-types:timeticks64
|           |     +--ro valid-route?  boolean
+--rw ospfv2
| +--rw global
| | +--rw config
| | | +--rw router-id?          yang:dotted-quad
| | | +--rw summary-route-cost-mode? enumeration
| | | +--rw log-adjacency-changes? boolean
| | +--ro state
| | | +--ro router-id?          yang:dotted-quad
| | | +--ro summary-route-cost-mode? enumeration
| | | +--ro log-adjacency-changes? boolean
| | +--rw timers
| | | +--rw spf
| | | | +--rw config
| | | | | +--rw initial-delay?  uint32
| | | | | +--rw maximum-delay?  uint32

```

```

| | | +--ro state
| | | +--ro initial-delay? uint32
| | | +--ro maximum-delay? uint32
| | | +--ro timer-type? enumeration
| | +--rw max-metric
| | +--rw config
| | | +--rw set? boolean
| | | +--rw include* identityref
| | | +--ro state
| | | +--ro set? boolean
| | | +--ro include* identityref
| | +--rw lsa-generation
| | +--rw config
| | | +--rw initial-delay? uint32
| | | +--rw maximum-delay? uint32
| | +--ro state
| | +--ro initial-delay? uint32
| | +--ro maximum-delay? uint32
| | +--ro timer-type? enumeration
| +--rw graceful-restart
| | +--rw config
| | | +--rw enabled? boolean
| | +--ro state
| | +--ro enabled? boolean
| +--rw mpls
| | +--rw config
| | | +--rw traffic-engineering-extensions? boolean
| | +--ro state
| | +--ro traffic-engineering-extensions? boolean
| +--rw areas
| | +--rw area* [identifier]
| | +--rw identifier -> ../config/identifier
| | +--rw config
| | | +--rw identifier? oc-ospf-types:ospf-area-identifier
| | +--ro state
| | +--ro identifier? oc-ospf-types:ospf-area-identifier

```

```

|   +--rw interfaces
|   |   +--rw interface* [id]
|   |   |   +--rw id          -> ../config/id
|   |   |   +--rw config
|   |   |   |   +--rw id?          string
|   |   |   |   +--rw network-type? identityref
|   |   |   |   +--rw priority?    uint8
|   |   |   |   +--rw authentication-type? string
|   |   |   |   +--rw metric?      oc-ospf-types:ospf-metric
|   |   |   |   +--rw passive?     boolean
|   |   |   +--ro state
|   |   |   |   +--ro id?          string
|   |   |   |   +--ro network-type? identityref
|   |   |   |   +--ro priority?    uint8
|   |   |   |   +--ro authentication-type? string
|   |   |   |   +--ro metric?      oc-ospf-types:ospf-metric
|   |   |   |   +--ro passive?     boolean
|   |   |   +--rw interface-ref
|   |   |   |   +--rw config
|   |   |   |   |   +--rw interface? -> /openconfig-interfaces:interfaces/interface/name
|   |   |   |   |   +--rw subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()]/../
interface]/subinterfaces/subinterface/index
|   |   |   |   |   +--ro state
|   |   |   |   |   +--ro interface? -> /openconfig-interfaces:interfaces/interface/name
|   |   |   |   |   +--ro subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()]/../
interface]/subinterfaces/subinterface/index
|   |   +--rw timers
|   |   |   +--rw config
|   |   |   |   +--rw dead-interval?    uint32
|   |   |   |   +--rw hello-interval?   uint32
|   |   |   |   +--rw retransmission-interval? uint32
|   |   |   +--ro state
|   |   |   |   +--ro dead-interval?    uint32
|   |   |   |   +--ro hello-interval?   uint32
|   |   |   |   +--ro retransmission-interval? uint32
|   |   +--rw mpls
|   |   |   +--rw config

```

```

|   |   | +-rw traffic-engineering-metric? uint32
|   |   +-ro state
|   |   | +-ro traffic-engineering-metric? uint32
|   |   +-rw igp-ldp-sync
|   |   +-rw config
|   |   | +-rw enabled? boolean
|   |   | +-rw post-session-up-delay? uint32
|   |   +-ro state
|   |   +-ro enabled? boolean
|   |   +-ro post-session-up-delay? uint32
|   +-rw lsa-filter
|   | +-rw config
|   | | +-rw all? boolean
|   | | +-ro state
|   | | +-ro all? boolean
|   +-rw enable-bfd
|   +-rw config
|   | +-rw enabled? boolean
|   +-ro state
|   +-ro enabled? boolean
| +-rw virtual-links
|   +-rw virtual-link* [remote-router-id]
|   +-rw remote-router-id -> ../config/remote-router-id
|   +-rw config
|   | +-rw remote-router-id? inet:ipv4-address-no-zone
|   +-ro state
|   +-ro remote-router-id? inet:ipv4-address-no-zone
|   +-ro adjacency-state? identityref
+--rw isis
  +-rw global
    +-rw config
    | +-rw net* oc-isis-types:net
    | +-rw maximum-area-addresses? uint8
    | +-rw level-capability? oc-isis-types:level-type
    +-ro state
    | +-ro net* oc-isis-types:net

```

```

| | +--ro maximum-area-addresses? uint8
| | +--ro level-capability?      oc-isis-types:level-type
| +--rw lsp-bit
| | +--rw overload-bit
| |   +--rw config
| |     | +--rw set-bit?        boolean
| |     | +--rw set-bit-on-boot? boolean
| |     +--ro state
| |       | +--ro set-bit?        boolean
| |       | +--ro set-bit-on-boot? boolean
| |       +--rw reset-triggers
| |         +--rw reset-trigger* [reset-trigger]
| |           +--rw reset-trigger -> ../config/reset-trigger
| |           +--rw config
| |             | +--rw reset-trigger? identityref
| |             | +--rw delay?      uint32
| |             +--ro state
| |               +--ro reset-trigger? identityref
| |               +--ro delay?      uint32
| +--rw graceful-restart
| | +--rw config
| | | +--rw enabled? boolean
| | +--ro state
| |   +--ro enabled? boolean
| +--rw timers
| | +--rw config
| | | +--rw lsp-lifetime-interval? uint16
| | | +--rw lsp-refresh-interval?  uint16
| | +--ro state
| | | +--ro lsp-lifetime-interval? uint16
| | | +--ro lsp-refresh-interval?  uint16
| | +--rw spf
| | | +--rw config
| | | | +--rw spf-first-interval?  uint64
| | | | +--rw spf-second-interval? uint64
| | | +--ro state

```

```

| | | +--ro spf-first-interval? uint64
| | | +--ro spf-second-interval? uint64
| | +--rw lsp-generation
| |   +--rw config
| |     | +--rw lsp-max-wait-interval? uint64
| |     +--ro state
| |       +--ro lsp-max-wait-interval? uint64
| +--rw transport
| | +--rw config
| | | +--rw lsp-mtu-size? uint16
| | | +--ro state
| | |   +--ro lsp-mtu-size? uint16
| +--rw afi-safi
| | +--rw af* [afi-name safi-name]
| |   +--rw afi-name -> ../config/afi-name
| |   +--rw safi-name -> ../config/safi-name
| |   +--rw config
| |     | +--rw afi-name? identityref
| |     | +--rw safi-name? identityref
| |     | +--rw metric? uint32
| |     +--ro state
| |       +--ro afi-name? identityref
| |       +--ro safi-name? identityref
| |       +--ro metric? uint32
| +--rw inter-level-propagation-policies
|   +--rw level1-to-level2
|     | +--rw config
|     | | +--rw default-import-policy? default-policy-type
|     | | +--ro state
|     | |   +--ro default-import-policy? default-policy-type
|     +--rw level2-to-level1
|       +--rw config
|         | +--rw default-import-policy? default-policy-type
|         +--ro state
|           +--ro default-import-policy? default-policy-type
+--rw levels

```

```

| +--rw level* [level-number]
|   +--rw level-number      -> ../config/level-number
|   +--rw config
|     | +--rw level-number?  oc-isis-types:level-number
|     | +--rw metric-style?  oc-isis-types:metric-style
|     +--ro state
|       | +--ro level-number?  oc-isis-types:level-number
|       | +--ro metric-style?  oc-isis-types:metric-style
|       +--rw system-level-counters
|         | +--ro state
|         |   +--ro corrupted-lsps?          openconfig-yang-types:counter32
|         |   +--ro database-overloads?      openconfig-yang-types:counter32
|         |   +--ro manual-address-drop-from-areas? openconfig-yang-types:counter32
|         |   +--ro exceed-max-seq-nums?      openconfig-yang-types:counter32
|         |   +--ro seq-num-skips?            openconfig-yang-types:counter32
|         |   +--ro own-lsp-purges?           openconfig-yang-types:counter32
|         |   +--ro id-len-mismatch?          openconfig-yang-types:counter32
|         |   +--ro part-changes?             openconfig-yang-types:counter32
|         |   +--ro max-area-address-mismatches? openconfig-yang-types:counter32
|         |   +--ro auth-fails?               openconfig-yang-types:counter32
|         |   +--ro spf-runs?                 openconfig-yang-types:counter32
|         |   +--ro auth-type-fails?          openconfig-yang-types:counter32
|         +--ro link-state-database
|           | +--ro lsp* [lsp-id]
|           |   +--ro lsp-id  -> ../state/lsp-id
|           |   +--ro state
|           |     | +--ro lsp-id?          oc-isis-types:lsp-id
|           |     | +--ro remaining-lifetime? uint16
|           |     | +--ro sequence-number?  string
|           |     | +--ro checksum?         string
|           |     | +--ro pdu-length?       uint16
|           |     | +--ro flags*            enumeration
|           |     +--ro tlvs
|           |       +--ro tlv* [type]
|           |         +--ro type           -> ../state/type
|           |         +--ro state

```

```

| | | +--ro type? identityref
| | +--ro area-address
| | | +--ro state
| | | +--ro address* oc-isis-types:area-address
| | +--ro nlpid
| | | +--ro state
| | | +--ro nlpid* enumeration
| | +--ro hostname
| | | +--ro state
| | | +--ro hostname* string
| | +--ro ipv4-interface-addresses
| | | +--ro state
| | | +--ro address* inet:ipv4-address
| | +--ro ipv6-interface-addresses
| | | +--ro state
| | | +--ro address* inet:ipv6-address
| | +--ro ipv4-te-router-id
| | | +--ro state
| | | +--ro router-id* inet:ipv4-address
| | +--ro ipv6-te-router-id
| | | +--ro state
| | | +--ro router-id* inet:ipv6-address
| | +--ro is-reachability
| | | +--ro neighbors
| | | | +--ro neighbor* [system-id]
| | | | +--ro system-id -> ../state/system-id
| | | | +--ro state
| | | | | +--ro system-id? oc-isis-types:system-id
| | | | +--ro default-metric
| | | | +--ro state
| | | | +--ro metric? uint8
| | +--ro ipv4-internal-reachability
| | | +--ro prefixes
| | | | +--ro prefix* [prefix]
| | | | +--ro prefix -> ../state/prefix
| | | | +--ro state

```

```

| | | | +--ro prefix? inet:ipv4-prefix
| | | | +--ro default-metric
| | | | +--ro state
| | | | +--ro metric? uint8
| | | +--ro ipv4-external-reachability
| | | | +--ro prefixes
| | | | +--ro prefix* [prefix]
| | | | +--ro prefix -> ../state/prefix
| | | | +--ro state
| | | | | +--ro prefix? inet:ipv4-prefix
| | | | | +--ro default-metric
| | | | | +--ro state
| | | | | +--ro metric? uint8
| | | +--ro extended-ipv4-reachability
| | | | +--ro prefixes
| | | | +--ro prefix* [prefix]
| | | | +--ro prefix -> ../state/prefix
| | | | +--ro state
| | | | | +--ro prefix? inet:ipv4-prefix
| | | | | +--ro metric? oc-isis-types:wide-metric
| | | | +--ro subtlvs
| | | | +--ro subtlv* [type]
| | | | +--ro type -> ../state/type
| | | | +--ro state
| | | | | +--ro type? identityref
| | | | +--ro tag
| | | | | +--ro state
| | | | | +--ro tag32* uint32
| | | | +--ro prefix-sids
| | | | +--ro prefix-sid* [value]
| | | | +--ro value -> ../state/value
| | | | +--ro state
| | | | +--ro value? uint32
| | | | +--ro flags* enumeration
| | +--ro ipv6-reachability
| | +--ro prefixes

```

```

| |      +--ro prefix* [prefix]
| |      +--ro prefix  -> ../state/prefix
| |      +--ro state
| |      | +--ro up-down?  boolean
| |      | +--ro prefix?  inet:ipv6-prefix
| |      | +--ro metric?  oc-isis-types:wide-metric
| |      +--ro subtlvs
| |      +--ro subtlv* [type]
| |      +--ro type  -> ../state/type
| |      +--ro state
| |      | +--ro type?  identityref
| |      +--ro tag
| |      +--ro state
| |      +--ro tag32*  uint32
| +--rw traffic-engineering
| | +--rw config
| | | +--rw enabled?      boolean
| | | +--rw ipv4-router-id?  openconfig-inet-types:ipv4-address
| | | +--rw ipv6-router-id?  openconfig-inet-types:ipv6-address
| | | +--ro state
| | | +--ro enabled?      boolean
| | | +--ro ipv4-router-id?  openconfig-inet-types:ipv4-address
| | | +--ro ipv6-router-id?  openconfig-inet-types:ipv6-address
| +--rw authentication
| | +--rw config
| | | +--rw auth-password?  openconfig-types:routing-password
| | | +--ro state
| | | +--ro auth-password?  openconfig-types:routing-password
+--rw interfaces
+--rw interface* [interface-id]
+--rw interface-id  -> ../config/interface-id
+--rw config
| +--rw interface-id?  openconfig-interfaces:interface-id
| +--rw passive?      boolean
| +--rw hello-padding?  oc-isis-types:hello-padding-type
| +--rw circuit-type?  oc-isis-types:circuit-type

```

```
+--ro state
| +--ro interface-id?  openconfig-interfaces:interface-id
| +--ro passive?      boolean
| +--ro hello-padding? oc-isis-types:hello-padding-type
| +--ro circuit-type?  oc-isis-types:circuit-type
+--rw circuit-counters
| +--ro state
| | +--ro adj-changes?          openconfig-yang-types:counter32
| | +--ro init-fails?          openconfig-yang-types:counter32
| | +--ro rejected-adj?        openconfig-yang-types:counter32
| | +--ro id-field-len-mismatches? openconfig-yang-types:counter32
| | +--ro max-area-address-mismatches? openconfig-yang-types:counter32
| | +--ro auth-type-fails?     openconfig-yang-types:counter32
| | +--ro auth-fails?         openconfig-yang-types:counter32
| | +--ro lan-dis-changes?     openconfig-yang-types:counter32
| | +--ro adj-number?         uint32
+--rw afi-safi
| +--rw af* [afi-name safi-name]
| | +--rw afi-name  -> ../config/afi-name
| | +--rw safi-name -> ../config/safi-name
| | +--rw config
| | | +--rw afi-name?  identityref
| | | +--rw safi-name? identityref
| | +--ro state
| | | +--ro afi-name?  identityref
| | | +--ro safi-name? identityref
+--rw levels
| +--rw level* [level-number]
| | +--rw level-number  -> ../config/level-number
| | +--rw config
| | | +--rw level-number? oc-isis-types:level-number
| | | +--rw priority?    uint8
| | +--ro state
| | | +--ro level-number? oc-isis-types:level-number
| | | +--ro priority?    uint8
| +--rw packet-counters
```

```

| | +--rw lsp
| | | +--ro state
| | |   +--ro received? openconfig-yang-types:counter32
| | |   +--ro sent?    openconfig-yang-types:counter32
| | +--rw ish
| | | +--ro state
| | |   +--ro received? openconfig-yang-types:counter32
| | |   +--ro sent?    openconfig-yang-types:counter32
| | +--rw psnp
| | | +--ro state
| | |   +--ro received? openconfig-yang-types:counter32
| | |   +--ro sent?    openconfig-yang-types:counter32
| | +--rw csnp
| | | +--ro state
| | |   +--ro received? openconfig-yang-types:counter32
| | |   +--ro sent?    openconfig-yang-types:counter32
| | +--rw unknown
| |   +--ro state
| |     +--ro received? openconfig-yang-types:counter32
| |     +--ro sent?    openconfig-yang-types:counter32
| +--rw timers
| | +--rw config
| | | +--rw hello-interval? uint32
| | | +--rw hello-multiplier? uint8
| | +--ro state
| |   +--ro hello-interval? uint32
| |   +--ro hello-multiplier? uint8
| +--rw hello-authentication
|   +--rw config
|   | +--rw auth-password? openconfig-types:routing-password
|   +--ro state
|     +--ro auth-password? openconfig-types:routing-password
+--rw enable-bfd
| +--rw config
| | +--rw enabled? boolean
| +--ro state

```



```

    |   +--ro enabled?  boolean
+--rw mpls
    |   +--rw igp-ldp-sync
    |   +--rw config
    |   |   +--rw enabled?  boolean
    |   +--ro state
    |       +--ro enabled?  boolean
+--rw interface-ref
    +--rw config
    |   +--rw interface?   -> /openconfig-interfaces:interfaces/interface/name
    |   +--rw subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()../interface]/
subinterfaces/subinterface/index
    +--ro state
    +--ro interface?   -> /openconfig-interfaces:interfaces/interface/name
    +--ro subinterface? -> /openconfig-interfaces:interfaces/interface[oc-if:name=current()../interface]/
subinterfaces/subinterface/index

```

module: openconfig-platform

```

+--rw components
+--rw component* [name]
    +--rw name          -> ../config/name
    +--rw config
    |   +--rw name?  string
    +--ro state
    |   +--ro name?          string
    |   +--ro type?         union
    |   +--ro id?           string
    |   +--ro location?     string
    |   +--ro description?  string
    |   +--ro mfg-name?     string
    |   +--ro mfg-date?     openconfig-yang-types:date
    |   +--ro hardware-version?  string
    |   +--ro firmware-version?  string
    |   +--ro software-version?  string
    |   +--ro serial-no?        string

```

```

| +--ro part-no?          string
| +--ro clei-code?        string
| +--ro removable?        boolean
| +--ro oper-status?      identityref
| +--ro empty?            boolean
| +--ro parent?           -> ../../component/config/name
| +--ro temperature
| | +--ro instant?        decimal64
| | +--ro avg?            decimal64
| | +--ro min?            decimal64
| | +--ro max?            decimal64
| | +--ro interval?       openconfig-types:stat-interval
| | +--ro alarm-status?   boolean
| | +--ro alarm-threshold? decimal64
| | +--ro alarm-severity? identityref
| +--ro memory
| | +--ro available?      uint64
| | +--ro utilized?       uint64
| +--ro allocated-power?   decimal64
| +--ro openconfig-alarms:equipment-failure? boolean
+--rw subcomponents
| +--ro subcomponent* [name]
|   +--ro name    -> ../state/name
|   +--ro state
|     +--ro name? -> ../../../../component/config/name
+--rw port
| +--rw openconfig-platform-port:breakout-mode
| | +--rw openconfig-platform-port:groups
| |   +--rw openconfig-platform-port:group* [index]
| |     +--rw openconfig-platform-port:index -> ../config/index
| |     +--rw openconfig-platform-port:config
| |       | +--rw openconfig-platform-port:index? uint8
| |       | +--rw openconfig-platform-port:num-breakouts? uint8
| |       | +--rw openconfig-platform-port:breakout-speed? identityref
| |       | +--rw openconfig-platform-port:num-physical-channels? uint8
| |       +--ro openconfig-platform-port:state

```

```

| |      +--ro openconfig-platform-port:index?  uint8
| |      +--ro openconfig-platform-port:num-breakouts?  uint8
| |      +--ro openconfig-platform-port:breakout-speed?  identityref
| |      +--ro openconfig-platform-port:num-physical-channels?  uint8
| +--rw openconfig-transport-line-common:optical-port
|   +--rw openconfig-transport-line-common:config
|     | +--rw openconfig-transport-line-common:admin-state?  openconfig-transport-types:admin-state-type
|     +--ro openconfig-transport-line-common:state
|       +--ro openconfig-transport-line-common:admin-state?  openconfig-transport-types:admin-state-type
|       +--ro openconfig-transport-line-common:optical-port-type?  identityref
+--rw power-supply
| +--rw config
| +--ro state
|   +--ro openconfig-platform-psu:enabled?  boolean
|   +--ro openconfig-platform-psu:capacity?  decimal64
|   +--ro openconfig-platform-psu:input-current?  decimal64
|   +--ro openconfig-platform-psu:input-voltage?  decimal64
|   +--ro openconfig-platform-psu:output-current?  decimal64
|   +--ro openconfig-platform-psu:output-voltage?  decimal64
|   +--ro openconfig-platform-psu:output-power?  decimal64
+--rw fan
| +--ro state
|   +--ro openconfig-platform-fan:speed?  uint32
+--rw cpu
| +--rw openconfig-platform-cpu:utilization
|   +--ro openconfig-platform-cpu:state
|     +--ro openconfig-platform-cpu:instant?  decimal64
|     +--ro openconfig-platform-cpu:avg?  decimal64
|     +--ro openconfig-platform-cpu:interval?  openconfig-types:stat-interval
+--rw openconfig-platform-linecard:linecard
| +--rw openconfig-platform-linecard:config
|   | +--rw openconfig-platform-linecard:power-admin-state?  oc-platform-types:component-power-type
|   +--ro openconfig-platform-linecard:state
|     +--ro openconfig-platform-linecard:power-admin-state?  oc-platform-types:component-power-type
|     +--ro openconfig-platform-linecard:slot-id?  string
+--rw openconfig-platform-transceiver:transceiver

```

```

| +--rw openconfig-platform-transceiver:config
| | +--rw openconfig-platform-transceiver:enabled?  boolean
| | +--rw openconfig-platform-transceiver:module-functional-type?  identityref
| +--ro openconfig-platform-transceiver:state
| | +--ro openconfig-platform-transceiver:enabled?  boolean
| | +--ro openconfig-platform-transceiver:module-functional-type?  identityref
| | +--ro openconfig-platform-transceiver:present?  enumeration
| | +--ro openconfig-platform-transceiver:form-factor?  identityref
| | +--ro openconfig-platform-transceiver:connector-type?  identityref
| | +--ro openconfig-platform-transceiver:vendor?  string
| | +--ro openconfig-platform-transceiver:vendor-part?  string
| | +--ro openconfig-platform-transceiver:vendor-rev?  string
| | +--ro openconfig-platform-transceiver:ethernet-pmd?  identityref
| | +--ro openconfig-platform-transceiver:sonet-sdh-compliance-code?  identityref
| | +--ro openconfig-platform-transceiver:serial-no?  string
| | +--ro openconfig-platform-transceiver:date-code?  string
| | +--ro openconfig-platform-transceiver:supply-voltage
| | | +--ro openconfig-platform-transceiver:instant?  decimal64
| | +--ro openconfig-platform-transceiver:output-power
| | | +--ro openconfig-platform-transceiver:instant?  decimal64
| | +--ro openconfig-platform-transceiver:input-power
| | | +--ro openconfig-platform-transceiver:instant?  decimal64
| | +--ro openconfig-platform-transceiver:laser-bias-current
| |   +--ro openconfig-platform-transceiver:instant?  decimal64
| +--rw openconfig-platform-transceiver:physical-channels
| | +--rw openconfig-platform-transceiver:channel* [index]
| |   +--rw openconfig-platform-transceiver:index -> ../config/index
| |   +--rw openconfig-platform-transceiver:config
| |     | +--rw openconfig-platform-transceiver:index?  uint16
| |     | +--rw openconfig-platform-transceiver:target-output-power?  decimal64
| |     +--ro openconfig-platform-transceiver:state
| |       +--ro openconfig-platform-transceiver:index?  uint16
| |       +--ro openconfig-platform-transceiver:target-output-power?  decimal64
| |       +--ro openconfig-platform-transceiver:laser-age?  decimal64
| |       +--ro openconfig-platform-transceiver:laser-temperature
| |         | +--ro openconfig-platform-transceiver:instant?  decimal64

```

```

| |   +--ro openconfig-platform-transceiver:target-frequency-deviation
| |   | +--ro openconfig-platform-transceiver:instant?  decimal64
| |   +--ro openconfig-platform-transceiver:output-frequency?  decimal64
| |   +--ro openconfig-platform-transceiver:output-power
| |   | +--ro openconfig-platform-transceiver:instant?  decimal64
| |   +--ro openconfig-platform-transceiver:input-power
| |   | +--ro openconfig-platform-transceiver:instant?  decimal64
| |   +--ro openconfig-platform-transceiver:laser-bias-current
| |   +--ro openconfig-platform-transceiver:instant?  decimal64
| +--rw openconfig-platform-transceiver:thresholds
|   +--ro openconfig-platform-transceiver:threshold* [severity]
|     +--ro openconfig-platform-transceiver:severity -> ../state/severity
|     +--ro openconfig-platform-transceiver:state
|       +--ro openconfig-platform-transceiver:severity?  identityref
|       +--ro openconfig-platform-transceiver:input-power-upper?  decimal64
|       +--ro openconfig-platform-transceiver:input-power-lower?  decimal64
+--rw openconfig-terminal-device:optical-channel
  +--rw openconfig-terminal-device:config
  | +--rw openconfig-terminal-device:frequency?  uint64
  | +--rw openconfig-terminal-device:target-output-power?  decimal64
  | +--rw openconfig-terminal-device:operational-mode?  uint16
  +--ro openconfig-terminal-device:state
    +--ro openconfig-terminal-device:frequency?          openconfig-transport-types:frequency-type
    +--ro openconfig-terminal-device:target-output-power?  decimal64
    +--ro openconfig-terminal-device:operational-mode?    uint16
    +--ro openconfig-terminal-device:line-port?          -> /openconfig-platform:components/component/name
    +--ro openconfig-terminal-device:output-power
    | +--ro openconfig-terminal-device:instant?  decimal64
    +--ro openconfig-terminal-device:input-power
    | +--ro openconfig-terminal-device:instant?  decimal64
    +--ro openconfig-terminal-device:laser-bias-current
    | +--ro openconfig-terminal-device:instant?  decimal64
    +--ro openconfig-terminal-device:chromatic-dispersion
    | +--ro openconfig-terminal-device:instant?  decimal64
    | +--ro openconfig-terminal-device:min?  decimal64
    | +--ro openconfig-terminal-device:max?  decimal64

```

```
+--ro openconfig-terminal-device:polarization-mode-dispersion
| +--ro openconfig-terminal-device:instant? decimal64
| +--ro openconfig-terminal-device:avg? decimal64
| +--ro openconfig-terminal-device:min? decimal64
| +--ro openconfig-terminal-device:max? decimal64
+--ro openconfig-terminal-device:second-order-polarization-mode-dispersion
| +--ro openconfig-terminal-device:instant? decimal64
| +--ro openconfig-terminal-device:avg? decimal64
| +--ro openconfig-terminal-device:min? decimal64
| +--ro openconfig-terminal-device:max? decimal64
+--ro openconfig-terminal-device:polarization-dependent-loss
| +--ro openconfig-terminal-device:instant? decimal64
| +--ro openconfig-terminal-device:avg? decimal64
| +--ro openconfig-terminal-device:min? decimal64
| +--ro openconfig-terminal-device:max? decimal64
+--ro openconfig-terminal-device:modulator-bias-xi
| +--ro openconfig-terminal-device:instant? decimal64
+--ro openconfig-terminal-device:modulator-bias-xq
| +--ro openconfig-terminal-device:instant? decimal64
+--ro openconfig-terminal-device:modulator-bias-yi
| +--ro openconfig-terminal-device:instant? decimal64
+--ro openconfig-terminal-device:modulator-bias-yq
| +--ro openconfig-terminal-device:instant? decimal64
+--ro openconfig-terminal-device:modulator-bias-x-phase
| +--ro openconfig-terminal-device:instant? decimal64
+--ro openconfig-terminal-device:modulator-bias-y-phase
| +--ro openconfig-terminal-device:instant? decimal64
+--ro openconfig-terminal-device:osnr
| +--ro openconfig-terminal-device:instant? decimal64
| +--ro openconfig-terminal-device:avg? decimal64
| +--ro openconfig-terminal-device:min? decimal64
| +--ro openconfig-terminal-device:max? decimal64
+--ro openconfig-terminal-device:carrier-frequency-offset
| +--ro openconfig-terminal-device:instant? decimal64
| +--ro openconfig-terminal-device:avg? decimal64
| +--ro openconfig-terminal-device:min? decimal64
```

```

| +--ro openconfig-terminal-device:max? decimal64
+--ro openconfig-terminal-device:sop-roc
| +--ro openconfig-terminal-device:instant? decimal64
| +--ro openconfig-terminal-device:avg? decimal64
| +--ro openconfig-terminal-device:min? decimal64
| +--ro openconfig-terminal-device:max? decimal64
+--ro openconfig-terminal-device:modulation-error-ratio
| +--ro openconfig-terminal-device:instant? decimal64
| +--ro openconfig-terminal-device:avg? decimal64
| +--ro openconfig-terminal-device:min? decimal64
| +--ro openconfig-terminal-device:max? decimal64
+--ro openconfig-terminal-device:fec-uncorrectable-blocks? ietf-yang-types:counter64
+--ro openconfig-terminal-device:pre-fec-ber
| +--ro openconfig-terminal-device:instant? decimal64
| +--ro openconfig-terminal-device:avg? decimal64
| +--ro openconfig-terminal-device:min? decimal64
| +--ro openconfig-terminal-device:max? decimal64
+--ro openconfig-terminal-device:post-fec-ber
| +--ro openconfig-terminal-device:instant? decimal64
| +--ro openconfig-terminal-device:avg? decimal64
| +--ro openconfig-terminal-device:min? decimal64
| +--ro openconfig-terminal-device:max? decimal64
+--ro openconfig-terminal-device:esnr
  +--ro openconfig-terminal-device:instant? decimal64
  +--ro openconfig-terminal-device:avg? decimal64
  +--ro openconfig-terminal-device:min? decimal64
  +--ro openconfig-terminal-device:max? decimal64

```

module: openconfig-qos

```

+--rw qos
  +--rw config
    | +--rw ipi-oc-qos-deviations:ipi-qos-enabled? boolean
  +--ro state
    | +--ro ipi-oc-qos-deviations:ipi-qos-enabled? boolean
  +--rw interfaces

```

```

| +--rw interface* [interface-id]
|   +--rw interface-id   -> ../config/interface-id
|   +--rw config
|   | +--rw interface-id? string
|   | +--ro state
|   | | +--ro interface-id? string
|   | +--rw interface-ref
|   | | +--rw config
|   | | | +--rw interface?   -> /oc-if:interfaces/interface/name
|   | | | +--rw subinterface? -> /oc-if:interfaces/interface[oc-if:name=current()../interface]/subinterfaces/
subinterface/index
|   | | +--ro state
|   | |   +--ro interface?   -> /oc-if:interfaces/interface/name
|   | |   +--ro subinterface? -> /oc-if:interfaces/interface[oc-if:name=current()../interface]/subinterfaces/
subinterface/index
|   +--rw input
|   | +--rw classifiers
|   |   +--rw classifier* [type]
|   |     +--rw type   -> ../config/type
|   |     +--rw config
|   |       | +--rw name? -> ../../../../../../../classifiers/classifier/config/name
|   |       | +--rw type? enumeration
|   |       +--ro state
|   |       | +--ro name? -> ../../../../../../../classifiers/classifier/config/name
|   |       | +--ro type? enumeration
|   |       +--rw terms
|   |         +--ro term* [id]
|   |           +--ro id   -> ../state/id
|   |           +--ro state
|   |           +--ro id?   -> ../../../../../../../classifiers/classifier[name=current()../../../../../../config/name]/terms/
term/config/id
|   |           +--ro matched-packets? oc-yang:counter64
|   |           +--ro matched-octets?  oc-yang:counter64
|   +--rw output
|   +--rw scheduler-policy
|   +--rw config
|   | +--rw name? -> ../../../../../../../scheduler-policies/scheduler-policy/config/name

```



```

|   +--ro state
|   | +--ro name?  -> ../../../../scheduler-policies/scheduler-policy/config/name
|   +--ro schedulers
|       +--ro scheduler* [sequence]
|           +--ro sequence  -> ../state/sequence
|           +--ro state
|               +--ro sequence?      -> ../../../../scheduler-policies/scheduler-policy[name=current()]/../../config/name]/schedulers/scheduler/config/sequence
|               +--ro conforming-pkts?  oc-yang:counter64
|               +--ro conforming-octets? oc-yang:counter64
|               +--ro exceeding-pkts?   oc-yang:counter64
|               +--ro exceeding-octets?  oc-yang:counter64
+--rw classifiers
| +--rw classifier* [name]
|   +--rw name  -> ../config/name
|   +--rw config
|       | +--rw name?  string
|       | +--rw type?  enumeration
|       +--ro state
|           | +--ro name?  string
|           | +--ro type?  enumeration
|       +--rw terms
|           +--rw term* [id]
|               +--rw id      -> ../config/id
|               +--rw config
|                   | +--rw id?  string
|               +--ro state
|                   | +--ro id?  string
|               +--rw conditions
|                   | +--rw ipv4
|                       +--rw config
|                           | +--rw source-address?  oc-inet:ipv4-prefix
|                           | +--rw destination-address? oc-inet:ipv4-prefix
|                           | +--rw dscp?            oc-inet:dscp
|                           +--ro state
|                           | +--ro source-address?  oc-inet:ipv4-prefix
|                           | +--ro destination-address? oc-inet:ipv4-prefix

```

```

|      |      +--ro dscp?          oc-inet:dscp
|      +--rw actions
|      +--rw config
|      |      +--rw target-group?  -> ../../../../../forwarding-groups/forwarding-group/config/name
|      +--ro state
|      +--ro target-group?  -> ../../../../../forwarding-groups/forwarding-group/config/name
+--rw forwarding-groups
| +--rw forwarding-group* [name]
|   +--rw name      -> ../config/name
|   +--rw config
|   |   +--rw name?      string
|   |   +--rw fabric-priority?  uint8
|   |   +--rw output-queue?    -> ../../../../../../queues/queue/config/name
|   +--ro state
|   +--ro name?      string
|   +--ro fabric-priority?  uint8
|   +--ro output-queue?    -> ../../../../../../queues/queue/config/name
+--rw queues
| +--rw queue* [name]
|   +--rw name      -> ../config/name
|   +--rw config
|   |   +--rw name?      string
|   |   +--rw queue-id?  uint8
|   +--ro state
|   +--ro name?      string
|   +--ro queue-id?  uint8
+--rw scheduler-policies
| +--rw scheduler-policy* [name]
|   +--rw name      -> ../config/name
|   +--rw config
|   |   +--rw name?      string
|   +--ro state
|   |   +--ro name?      string
|   +--rw schedulers
|   +--rw scheduler* [sequence]
|   +--rw sequence      -> ../config/sequence

```

```

|   +--rw config
|   |   +--rw sequence?  uint32
|   |   +--rw type?      identityref
|   |   +--rw priority?  enumeration
|   +--ro state
|   |   +--ro sequence?  uint32
|   |   +--ro type?      identityref
|   |   +--ro priority?  enumeration
|   +--rw inputs
|   |   +--rw input* [id]
|   |   |   +--rw id      -> ../config/id
|   |   |   +--rw config
|   |   |   |   +--rw id?      string
|   |   |   |   +--rw input-type?  enumeration
|   |   |   |   +--rw queue      -> ../../../../../../queues/queue/name
|   |   |   |   +--rw weight?   uint64
|   |   |   +--ro state
|   |   |   |   +--ro id?      string
|   |   |   |   +--ro input-type?  enumeration
|   |   |   |   +--ro queue?    -> ../../../../../../queues/queue/name
|   |   |   |   +--ro weight?   uint64
|   +--rw one-rate-two-color
|   |   +--rw config
|   |   |   +--rw cir?          uint64
|   |   |   +--rw queuing-behavior?  oc-qos-types:queue-behavior
|   |   |   +--rw max-queue-depth-bytes?  uint32
|   |   +--ro state
|   |   |   +--ro cir?          uint64
|   |   |   +--ro queuing-behavior?  oc-qos-types:queue-behavior
|   |   +--ro max-queue-depth-bytes?  uint32
+--rw queue-management-profiles
+--rw queue-management-profile* [name]
+--rw name      -> ../config/name
+--rw config
| +--rw name?  string
+--ro state

```

```

| +--ro name?  string
+--rw wred
  +--rw uniform
    +--rw config
      | +--rw min-threshold?  uint64
      | +--rw max-threshold?  uint64
    +--ro state
      +--ro min-threshold?  uint64
      +--ro max-threshold?  uint64

```

module: openconfig-routing-policy

```

+--rw routing-policy
  +--rw defined-sets
    | +--rw tag-sets
    | | +--rw tag-set* [name]
    | |   +--rw name      -> ../config/name
    | |   +--rw config
    | | | +--rw name?      string
    | | | +--rw tag-value* openconfig-policy-types:tag-type
    | |   +--ro state
    | | | +--ro name?      string
    | | | +--ro tag-value* openconfig-policy-types:tag-type
    | +--rw openconfig-bgp-policy:bgp-defined-sets
    | +--rw openconfig-bgp-policy:ext-community-sets
    |   +--rw openconfig-bgp-policy:ext-community-set* [ext-community-set-name]
    |     +--rw openconfig-bgp-policy:ext-community-set-name -> ../config/ext-community-set-name
    |     +--rw openconfig-bgp-policy:config
    |       +--rw openconfig-bgp-policy:ext-community-set-name? string
    |       +--rw openconfig-bgp-policy:ext-community-member* union
    |       +--rw openconfig-bgp-policy:match-set-options? openconfig-policy-types:match-set-options-type
  +--rw policy-definitions
    +--rw policy-definition* [name]
      +--rw name      -> ../config/name
      +--rw config
        | +--rw name?  string

```

```

+--ro state
| +--ro name?  string
+--rw statements
  +--rw statement* [name]
    +--rw name      -> ../config/name
    +--rw config
    | +--rw name?  uint32
    +--ro state
    | +--ro name?  string
    +--rw conditions
    | +--rw config
    | +--rw match-tag-set
    | | +--rw config
    | | | +--rw tag-set?  -> ../../../../defined-sets/tag-sets/tag-set/name
    | | +--ro state
    | |   +--ro tag-set?  -> ../../../../defined-sets/tag-sets/tag-set/name
    | +--rw openconfig-bgp-policy:bgp-conditions
    |   +--rw openconfig-bgp-policy:config
    | | +--rw openconfig-bgp-policy:ext-community-set?  -> /openconfig-routing-policy:routing-policy/defined-sets/openconfig-bgp-policy:bgp-defined-sets/ext-community-sets/ext-community-set/ext-community-set-name
    | |   +--ro openconfig-bgp-policy:state
    | |   +--ro openconfig-bgp-policy:ext-community-set?  -> /openconfig-routing-policy:routing-policy/defined-sets/openconfig-bgp-policy:bgp-defined-sets/ext-community-sets/ext-community-set/ext-community-set-name
    +--rw actions
    +--rw config
    | +--rw policy-result?  policy-result-type
    +--ro state
    | +--ro policy-result?  policy-result-type
    +--rw openconfig-bgp-policy:bgp-actions
    +--rw openconfig-bgp-policy:config
    | +--rw openconfig-bgp-policy:set-route-origin?  openconfig-bgp-types:bgp-origin-attr-type
    | +--rw openconfig-bgp-policy:set-local-pref?  uint32
    +--ro openconfig-bgp-policy:state
    +--ro openconfig-bgp-policy:set-route-origin?  openconfig-bgp-types:bgp-origin-attr-type
    +--ro openconfig-bgp-policy:set-local-pref?  uint32

```

module: openconfig-system

```

+--rw system
  +--rw config
    | +--rw hostname? openconfig-inet-types:domain-name
  +--ro state
    | +--ro hostname? openconfig-inet-types:domain-name
    | +--ro current-datetime? string
    | +--ro boot-time? openconfig-types:timeticks64
  +--rw clock
    | +--rw config
    | | +--rw timezone-name? timezone-name-type
    | +--ro state
    | | +--ro timezone-name? timezone-name-type
  +--rw logging
    | +--rw remote-servers
    | | +--rw remote-server* [host]
    | | | +--rw host -> ../config/host
    | | | +--rw config
    | | | | +--rw host? openconfig-inet-types:host
    | | | | +--rw network-instance? oc-ni:network-instance-ref
    | | | | +--rw remote-port? openconfig-inet-types:port-number
    | | | +--ro state
    | | | | +--ro host? openconfig-inet-types:host
    | | | | +--ro network-instance? oc-ni:network-instance-ref
    | | | | +--ro remote-port? openconfig-inet-types:port-number
    | | +--rw selectors
    | | | +--rw selector* [facility severity]
    | | | | +--rw facility -> ../config/facility
    | | | | +--rw severity -> ../config/severity
    | | | | +--rw config
    | | | | | +--rw facility? identityref
    | | | | | +--rw severity? syslog-severity
    | | | +--ro state
    | | | | +--ro facility? identityref
    | | | | +--ro severity? syslog-severity

```

```

+--ro alarms
  +--ro alarm* [id]
    +--ro id      -> ../state/id
    +--ro config
    +--ro state
      +--ro id?                string
      +--ro resource?          string
      +--ro text?              string
      +--ro time-created?      openconfig-types:timeticks64
      +--ro severity?          identityref
      +--ro type-id?           union
      +--ro ipi-oc-sys-deviations:alarm-reported-timestamp? string

```

module: openconfig-terminal-device

```

+--rw terminal-device
  +--rw config
  +--rw logical-channels
  | +--rw channel* [index]
  |   +--rw index          -> ../config/index
  |   +--rw config
  |     | +--rw index?      uint32
  |     | +--rw admin-state? openconfig-transport-types:admin-state-type
  |     | +--rw logical-channel-type? identityref
  |     | +--rw loopback-mode? openconfig-transport-types:loopback-mode-type
  |     +--ro state
  |       | +--ro index?    uint32
  |       | +--ro description? string
  |       | +--ro admin-state? openconfig-transport-types:admin-state-type
  |       | +--ro rate-class? identityref
  |       | +--ro trib-protocol? identityref
  |       | +--ro logical-channel-type? identityref
  |       | +--ro loopback-mode? openconfig-transport-types:loopback-mode-type
  |       | +--ro test-signal? boolean
  |     +--rw otn
  |     | +--ro state

```

```

| | +--ro errored-blocks?      ietf-yang-types:counter64
| | +--ro fec-uncorrectable-blocks? ietf-yang-types:counter64
| | +--ro pre-fec-ber
| | | +--ro instant? uint64
| | +--ro post-fec-ber
| | | +--ro instant? uint64
| | +--ro q-value
| |   +--ro instant? decimal64
| +--rw ethernet
| | +--ro state
| | +--ro in-block-errors?      openconfig-yang-types:counter64
| | +--ro out-8021q-frames?     openconfig-yang-types:counter64
| | +--ro in-pcs-bip-errors?     openconfig-yang-types:counter64
| | +--ro out-pcs-bip-errors?    openconfig-yang-types:counter64
| | +--ro out-block-errors?     openconfig-yang-types:counter64
| | +--ro fec-uncorrectable-blocks? ietf-yang-types:counter64
| | +--ro pre-fec-ber
| | | +--ro instant? decimal64
| | | +--ro avg? decimal64
| | | +--ro min? decimal64
| | | +--ro max? decimal64
| | +--ro post-fec-ber
| | | +--ro instant? decimal64
| | | +--ro avg? decimal64
| | | +--ro min? decimal64
| | | +--ro max? decimal64
| | +--ro q-value
| | | +--ro instant? decimal64
| | +--ro esnr
| |   +--ro instant? decimal64
| +--rw ingress
| | +--ro state
| | +--ro transceiver? -> /openconfig-platform:components/component/name
| | +--ro interface? openconfig-interfaces:base-interface-ref
| +--rw logical-channel-assignments
|   +--rw assignment* [index]

```

```

|   +--rw index    -> ../config/index
|   +--rw config
|   |   +--rw index?  uint32
|   +--ro state
|       +--ro index?      uint32
|       +--ro assignment-type?  enumeration
|       +--ro logical-channel? -> /terminal-device/logical-channels/channel/index
|       +--ro optical-channel? -> /openconfig-platform:components/component/name
|       +--ro allocation?   decimal64
+--rw operational-modes
    +--ro mode* [mode-id]
        +--ro mode-id    -> ../state/mode-id
        +--ro state
            +--ro mode-id?   uint16
            +--ro description? string
            +--ro vendor-id?  string

```

module: openconfig-terminal-device-properties

```

+--ro operational-modes
    +--ro mode-descriptor* [mode-id]
        +--ro mode-id      -> ../state/mode-id
        +--ro state
            |   +--ro mode-id?   uint16
            |   +--ro mode-type? identityref
        +--ro explicit-mode
            +--ro operational-mode-capabilities
                |   +--ro state
                |   |   +--ro modulation-format?  union
                |   |   +--ro bit-rate?           openconfig-terminal-device-property-types:bit-rate
                |   |   +--ro baud-rate?          decimal64
            +--ro optical-channel-config-value-constraints
                +--ro state
                    +--ro min-central-frequency?  openconfig-transport-types:frequency-type
                    +--ro max-central-frequency?  openconfig-transport-types:frequency-type
                    +--ro adjustment-granularity? openconfig-terminal-device-property-types:adjustment-granularity

```

+--ro min-output-power?	decimal64
+--ro max-output-power?	decimal64

module: ipi-oc-if-deviations

augment /oc-if:interfaces/oc-if:interface/oc-eth:ethernet/oc-eth:config:

+--rw lacp-mode? openconfig-lacp:lacp-activity-type

augment /oc-if:interfaces/oc-if:interface/oc-eth:ethernet/oc-eth:state:

+--ro lacp-mode? openconfig-lacp:lacp-activity-type

augment /oc-if:interfaces/oc-if:interface/oc-eth:ethernet/oc-eth:config:

+--rw load-interval? uint16

augment /oc-if:interfaces/oc-if:interface/oc-eth:ethernet/oc-eth:state:

+--ro load-interval? uint16