



OcNOS®
**Open Compute
Network Operating System
for Data Centers
Version 6.3.5**

Layer 1 Guide
June 2024

© 2024 IP Infusion Inc. All Rights Reserved.

This documentation is subject to change without notice. The software described in this document and this documentation are furnished under a license agreement or nondisclosure agreement. The software and documentation may be used or copied only in accordance with the terms of the applicable agreement. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or any means electronic or mechanical, including photocopying and recording for any purpose other than the purchaser's internal use without the written permission of IP Infusion Inc.

IP Infusion Inc.

3965 Freedom Circle, Suite 200

Santa Clara, CA 95054

+1 408-400-1900

<http://www.ipinfusion.com/>

For support, questions, or comments via E-mail, contact:

support@ipinfusion.com

Trademarks:

IP Infusion and OcNOS are trademarks or registered trademarks of IP Infusion. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Use of certain software included in this equipment is subject to the IP Infusion, Inc. End User License Agreement at <http://www.ipinfusion.com/license>. By using the equipment, you accept the terms of the End User License Agreement.

Contents

Preface	v
Audience	v
Conventions	v
Chapter Organization	v
Related Documentation	v
Migration Guide	v
Feature Availability	vi
Support	vi
Comments	vi
Command Line Interface	7
Overview	7
Command Line Interface Help	7
Command Completion	8
Command Abbreviations	8
Command Line Errors	8
Command Negation	9
Syntax Conventions	9
Variable Placeholders	10
Command Description Format	11
Keyboard Operations	11
Show Command Modifiers	12
String Parameters	15
Command Modes	15
Transaction-based Command-line Interface	17
Layer 1 Configuration Guide	19
CHAPTER 1 Cross-Connect (XC)	21
Topology	21
Configuration using Topology-1	22
Validation	24
Configuration using Topology-2	30
Validation	32
Configuring Cross connect using Static lag interfaces:	34
Validation	36
CHAPTER 2 Cross-Connect (XC) Resiliency	39
CHAPTER 3 CFM over xConnect Configuration	49
Topology	49
Configuration	49
Validation	54
Layer 1 Command Reference	57

CHAPTER 1	Port Based xConnect Commands	59
	backup	60
	cross-connect	61
	cross-connect switchover type revertive	62
	disable	63
	ep1 <interface_name> ep2 <interface_name>	64
	link-fault-pass-through enable	65
	show cross-connect	66
Index		69

Preface

This guide describes how to configure OcNOS.

IP Maestro Support

Monitor devices running OcNOS Release 6.3.4-70 and above using IP Maestro software.

Audience

This guide is intended for network administrators and other engineering professionals who configure OcNOS.

Conventions

[Table P-1](#) shows the conventions used in this guide.

Table P-1: Conventions

Convention	Description
<i>Italics</i>	Emphasized terms; titles of books
Note:	Special instructions, suggestions, or warnings
<code>monospaced type</code>	Code elements such as commands, parameters, files, and directories

Chapter Organization

The chapters in command references are organized as described in [Command Description Format](#).

The chapters in configuration guides are organized into these major sections:

- An overview that explains a configuration in words
 - Topology with a diagram that shows the devices and connections used in the configuration
 - Configuration steps in a table for each device where the left-hand side shows the commands you enter and the right-hand side explains the actions that the commands perform
 - Validation which shows commands and their output that verify the configuration
-

Related Documentation

For information about installing of OcNOS, see the *Installation Guide* for your platform.

Migration Guide

Check the *Migration Guide* for configuration changes to make when migrating from one version of OcNOS to another.

Feature Availability

The features described in this document that are available depend upon the OcNOS SKU that you purchased. See the *Feature Matrix* for a description of the OcNOS SKUs.

Support

For support-related questions, contact support@ipinfusion.com.

Comments

If you have comments, or need to report a problem with the content, contact techpubs@ipinfusion.com.

Command Line Interface

This chapter introduces the OcNOS Command Line Interface (CLI) and how to use its features.

Overview

You use the CLI to configure, monitor, and maintain OcNOS devices. The CLI is text-based and each command is usually associated with a specific task.

You can give the commands described in this manual locally from the console of a device running OcNOS or remotely from a terminal emulator such as `putty` or `xterm`. You can also use the commands in scripts to automate configuration tasks.

Command Line Interface Help

You access the CLI help by entering a full or partial command string and a question mark “?”. The CLI displays the command keywords or parameters along with a short description. For example, at the CLI command prompt, type:

```
> show ?
```

The CLI displays this keyword list with short descriptions for each keyword:

```
show ?
  application-priority      Application Priority
  arp                      Internet Protocol (IP)
  bfd                      Bidirectional Forwarding Detection (BFD)
  bgp                      Border Gateway Protocol (BGP)
  bi-lsp                   Bi-directional lsp status and configuration
  bridge                   Bridge group commands
  ce-vlan                  COS Preservation for Customer Edge VLAN
  class-map                Class map entry
  cli                      Show CLI tree of current mode
  clns                    Connectionless-Mode Network Service (CLNS)
  control-adjacency       Control Adjacency status and configuration
  control-channel         Control Channel status and configuration
  cspf                    CSPF Information
  customer                 Display Customer spanning-tree
  cvlan                   Display CVLAN information
  debugging               Debugging functions (see also 'undebug')
  etherchannel            LACP etherchannel
  ethernet                Layer-2
  ...
```

If you type the ? in the middle of a keyword, the CLI displays help for that keyword only.

```
> show de?
debugging Debugging functions (see also 'undebug')
```

If you type the ? in the middle of a keyword, but the incomplete keyword matches several other keywords, OcNOS displays help for all matching keywords.

```
> show i? (CLI does not display the question mark).
interface Interface status and configuration
ip IP information
isis ISIS information
```

Command Completion

The CLI can complete the spelling of a command or a parameter. Begin typing the command or parameter and then press the tab key. For example, at the CLI command prompt type `sh`:

```
> sh
```

Press the tab key. The CLI displays:

```
> show
```

If the spelling of a command or parameter is ambiguous, the CLI displays the choices that match the abbreviation. Type `show i` and press the tab key. The CLI displays:

```
> show i
  interface ip          ipv6          isis
> show i
```

The CLI displays the `interface` and `ip` keywords. Type `n` to select `interface` and press the tab key. The CLI displays:

```
> show in
> show interface
```

Type `?` and the CLI displays the list of parameters for the `show interface` command.

```
> show interface
  IFNAME  Interface name
  |       Output modifiers
  >      Output redirection
  <cr>
```

The CLI displays the only parameter associated with this command, the `IFNAME` parameter.

Command Abbreviations

The CLI accepts abbreviations that uniquely identify a keyword in commands. For example:

```
> sh int xe0
```

is an abbreviation for:

```
> show interface xe0
```

Command Line Errors

Any unknown spelling causes the CLI to display the error `Unrecognized command` in response to the `?`. The CLI displays the command again as last entered.

```
> show dd?
% Unrecognized command
> show dd
```

When you press the Enter key after typing an invalid command, the CLI displays:

```
(config)#router ospf here
                        ^
% Invalid input detected at '^' marker.
```

where the `^` points to the first character in error in the command.

If a command is incomplete, the CLI displays the following message:

```
> show
% Incomplete command.
```

Some commands are too long for the display line and can wrap mid-parameter or mid-keyword, as shown below. This does *not* cause an error and the command performs as expected:

```
area 10.10.0.18 virtual-link 10.10.0.19 authent
ication-key 57393
```

Command Negation

Many commands have a `no` form that resets a feature to its default value or disables the feature. For example:

- The `ip address` command assigns an IPv4 address to an interface
- The `no ip address` command removes an IPv4 address from an interface

Syntax Conventions

[Table P-2](#) describes the conventions used to represent command syntax in this reference.

Table P-2: Syntax conventions

Convention	Description	Example
monospaced font	Command strings entered on a command line	<code>show ip ospf</code>
lowercase	Keywords that you enter exactly as shown in the command syntax.	<code>show ip ospf</code>
UPPERCASE	See Variable Placeholders	IFNAME
()	Optional parameters, from which you must select one. Vertical bars delimit the selections. Do not enter the parentheses or vertical bars as part of the command.	<code>(A.B.C.D <0-4294967295>)</code>
()	Optional parameters, from which you select one or none. Vertical bars delimit the selections. Do not enter the parentheses or vertical bars as part of the command.	<code>(A.B.C.D <0-4294967295>)</code>
()	Optional parameter which you can specify or omit. Do not enter the parentheses or vertical bar as part of the command.	<code>(IFNAME)</code>
{ }	Optional parameters, from which you must select one or more. Vertical bars delimit the selections. Do not enter the braces or vertical bars as part of the command.	<code>{intra-area <1-255> inter-area <1-255> external <1-255>}</code>

Table P-2: Syntax conventions (Continued)

Convention	Description	Example
[]	Optional parameters, from which you select zero or more. Vertical bars delimit the selections. Do not enter the brackets or vertical bars as part of the command.	[<1-65535> AA:NN internet local-AS no-advertise no-export]
?	Nonrepeatable parameter. The parameter that follows a question mark can only appear once in a command string. Do not enter the question mark as part of the command.	?route-map WORD
.	Repeatable parameter. The parameter that follows a period can be repeated more than once. Do not enter the period as part of the command.	set as-path prepend .<1-65535>

Variable Placeholders

Table P-3 shows the tokens used in command syntax use to represent variables for which you supply a value.

Table P-3: Variable placeholders

Token	Description
WORD	A contiguous text string (excluding spaces)
LINE	A text string, including spaces; no other parameters can follow this parameter
IFNAME	Interface name whose format varies depending on the platform; examples are: eth0, Ethernet0, ethernet0, xe0
A.B.C.D	IPv4 address
A.B.C.D/M	IPv4 address and mask/prefix
X:X::X:X	IPv6 address
X:X::X:X/M	IPv6 address and mask/prefix
HH:MM:SS	Time format
AA:NN	BGP community value
XX:XX:XX:XX:XX:XX	MAC address
<1-5> <1-65535> <0-2147483647> <0-4294967295>	Numeric range

Command Description Format

Table P-4 explains the sections used to describe each command in this reference.

Table P-4: Command descriptions

Section	Description
Command Name	The name of the command, followed by what the command does and when should it be used
Command Syntax	The syntax of the command
Parameters	Parameters and options for the command
Default	The state before the command is executed
Command Mode	The mode in which the command runs; see Command Modes
Example	An example of the command being executed

Keyboard Operations

Table P-5 lists the operations you can perform from the keyboard.

Table P-5: Keyboard operations

Key combination	Operation
Left arrow or Ctrl+b	Moves one character to the left. When a command extends beyond a single line, you can press left arrow or Ctrl+b repeatedly to scroll toward the beginning of the line, or you can press Ctrl+a to go directly to the beginning of the line.
Right arrow or Ctrl-f	Moves one character to the right. When a command extends beyond a single line, you can press right arrow or Ctrl+f repeatedly to scroll toward the end of the line, or you can press Ctrl+e to go directly to the end of the line.
Esc, b	Moves back one word
Esc, f	Moves forward one word
Ctrl+e	Moves to end of the line
Ctrl+a	Moves to the beginning of the line
Ctrl+u	Deletes the line
Ctrl+w	Deletes from the cursor to the previous whitespace
Alt+d	Deletes the current word
Ctrl+k	Deletes from the cursor to the end of line
Ctrl+y	Pastes text previously deleted with Ctrl+k, Alt+d, Ctrl+w, or Ctrl+u at the cursor

Table P-5: Keyboard operations (Continued)

Key combination	Operation
Ctrl+t	Transposes the current character with the previous character
Ctrl+c	Ignores the current line and redisplay the command prompt
Ctrl+z	Ends configuration mode and returns to exec mode
Ctrl+l	Clears the screen
Up Arrow or Ctrl+p	Scroll backward through command history
Down Arrow or Ctrl+n	Scroll forward through command history

Show Command Modifiers

You can use two tokens to modify the output of a `show` command. Enter a question mark to display these tokens:

```
# show users ?
  | Output modifiers
  > Output redirection
```

You can type the | (vertical bar character) to use output modifiers. For example:

```
> show rsvp | ?
begin      Begin with the line that matches
exclude    Exclude lines that match
include    Include lines that match
last       Last few lines
redirect   Redirect output
```

Begin Modifier

The `begin` modifier displays the output beginning with the first line that contains the input string (everything typed after the `begin` keyword). For example:

```
# show running-config | begin xe1
...skipping
interface xe1
  ipv6 address fe80::204:75ff:fee6:5393/64
!
interface xe2
  ipv6 address fe80::20d:56ff:fe96:725a/64
!
line con 0
  login
!
end
```

You can specify a regular expression after the `begin` keyword. This example begins the output at a line with either “xe2” or “xe4”:

```
# show running-config | begin xe[3-4]
...skipping
```

```

interface xe3
 shutdown
 !
interface xe4
 shutdown
 !
interface svlan0.1
 no shutdown
 !
route-map myroute permit 3
 !
route-map mymap1 permit 10
 !
route-map rmap1 permit 3
 !
line con 0
 login
line vty 0 4
 login
 !
end

```

Include Modifier

The `include` modifier includes only those lines of output that contain the input string. In the output below, all lines containing the word “input” are included:

```

# show interface xe1 | include input
input packets 80434552, bytes 2147483647, dropped 0, multicast packets 0
input errors 0, length 0, overrun 0, CRC 0, frame 0, fifo 1, missed 0

```

You can specify a regular expression after the `include` keyword. This examples includes all lines with “input” or “output”:

```

#show interface xe0 | include (in|out)put
input packets 597058, bytes 338081476, dropped 0, multicast packets 0
input errors 0, length 0, overrun 0, CRC 0, frame 0, fifo 0, missed 0
output packets 613147, bytes 126055987, dropped 0
output errors 0, aborted 0, carrier 0, fifo 0, heartbeat 0, window 0

```

Exclude Modifier

The `exclude` modifier excludes all lines of output that contain the input string. In the following output example, all lines containing the word “input” are excluded:

```

# show interface xe1 | exclude input
Interface xe1
Scope: both
Hardware is Ethernet, address is 0004.75e6.5393
index 3 metric 1 mtu 1500 <UP,BROADCAST,RUNNING,MULTICAST>
VRF Binding: Not bound
Administrative Group(s): None
DSTE Bandwidth Constraint Mode is MAM
inet6 fe80::204:75ff:fee6:5393/64
output packets 4438, bytes 394940, dropped 0
output errors 0, aborted 0, carrier 0, fifo 0, heartbeat 0, window 0
collisions 0

```

You can specify a regular expression after the `exclude` keyword. This example excludes lines with “output” or “input”:

```
# show interface xe0 | exclude (in|out)put
Interface xe0
  Scope: both
  Hardware is Ethernet Current HW addr: 001b.2139.6c4a
  Physical:001b.2139.6c4a Logical:(not set)
  index 2 metric 1 mtu 1500 duplex-full arp ageing timeout 3000
  <UP,BROADCAST,RUNNING,MULTICAST>
  VRF Binding: Not bound
  Bandwidth 100m
  DHCP client is disabled.
  inet 10.1.2.173/24 broadcast 10.1.2.255
  VRRP Master of : VRRP is not configured on this interface.
  inet6 fe80::21b:21ff:fe39:6c4a/64
  collisions 0
```

Redirect Modifier

The `redirect` modifier writes the output into a file. The output is not displayed.

```
# show cli history | redirect /var/frame.txt
```

The output redirection token (`>`) does the same thing:

```
# show cli history >/var/frame.txt
```

Last Modifier

The `last` modifier displays the output of last few number of lines (As per the user input). The last number ranges from 1 to 9999.

For example:

```
#show running-config | last 10
```

String Parameters

The restrictions in [Table P-6](#) apply for all string parameters used in OcNOS commands, unless some other restrictions are noted for a particular command.

Table P-6: String parameter restrictions

Restriction	Description
Input length	1965 characters or less
Restricted special characters	“?”, “,”, “>”, “ ”, and “=” The “ ” is allowed only for <code>description</code> CLI in interface mode.

Command Modes

Commands are grouped into modes arranged in a hierarchy. Each mode has its own set of commands. [Table P-7](#) lists the command modes common to all protocols.

Table P-7: Common command modes

Name	Description
Executive mode	Also called <i>view</i> mode, this is the first mode to appear after you start the CLI. It is a base mode from where you can perform basic commands such as <code>show</code> , <code>exit</code> , <code>quit</code> , <code>help</code> , and <code>enable</code> .
Privileged executive mode	Also called <i>enable</i> mode, in this mode you can run additional basic commands such as <code>debug</code> , <code>write</code> , and <code>show</code> .
Configure mode	Also called <i>configure terminal</i> mode, in this mode you can run configuration commands and go into other modes such as interface, router, route map, key chain, and address family. Configure mode is single user. Only one user at a time can be in configure mode.
Interface mode	In this mode you can configure protocol-specific settings for a particular interface. Any setting you configure in this mode overrides a setting configured in router mode.
Router mode	This mode is used to configure router-specific settings for a protocol such as BGP or OSPF.

Command Mode Tree

The diagram below shows the common command mode hierarchy.

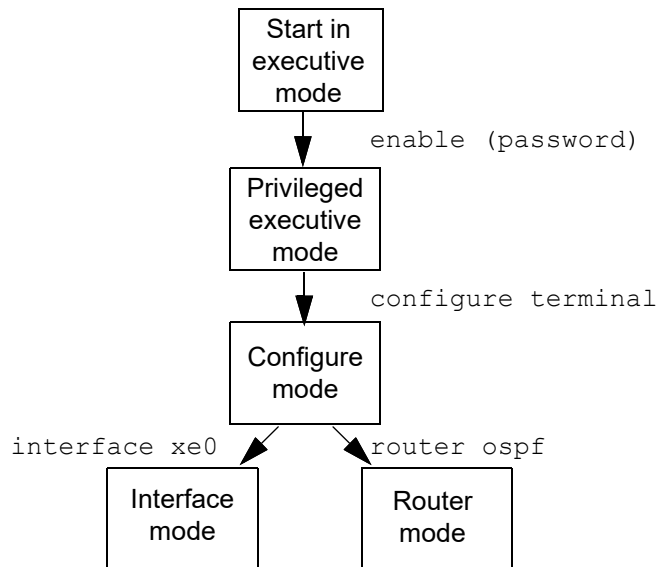


Figure P-1: Common command modes

To change modes:

1. Enter privileged executive mode by entering `enable` in Executive mode.
2. Enter configure mode by entering `configure terminal` in Privileged Executive mode.

The example below shows moving from executive mode to privileged executive mode to configure mode and finally to router mode:

```

> enable mypassword
# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
(config)# router ospf
(config-router)#
  
```

Note: Each protocol can have modes in addition to the common command modes. See the command reference for the respective protocol for details.

Transaction-based Command-line Interface

The OcNOS command line interface is transaction based:

- Any changes done in configure mode are stored in a separate *candidate* configuration that you can view with the `show transaction current` command.
- When a configuration is complete, apply the candidate configuration to the running configuration with the `commit` command.
- If a `commit` fails, no configuration is applied as the entire transaction is considered failed. You can continue to change the candidate configuration and then retry the `commit`.
- Discard the candidate configuration with the `abort transaction` command.
- Check the last aborted transaction with the `show transaction last-aborted` command.
- Multiple configurations cannot be removed with a single commit. You must remove each configuration followed by a commit.

Note: All commands MUST be executed only in the default CML shell (`cmlsh`). If you log in as `root` and start `imish` then the system configurations will go out of sync. The `imish` shell is not supported and should not be started manually.

Layer 1 Configuration Guide

CHAPTER 1 Cross-Connect (XC)

This chapter contains the cross-connect configuration examples to connect the two cross connection ports.

The cross connect is bi-directional. The traffic which is received on the first interface is transmitted out to the second interface and the traffic which is received on the second interface is transmitted out to the first interface.

It is point-to-point and same end points (EP) cannot be used for another cross connect.

The following are the types of end points supported by this port based on cross connect.

1. Native Ethernet interface
2. LAG interface

Topology

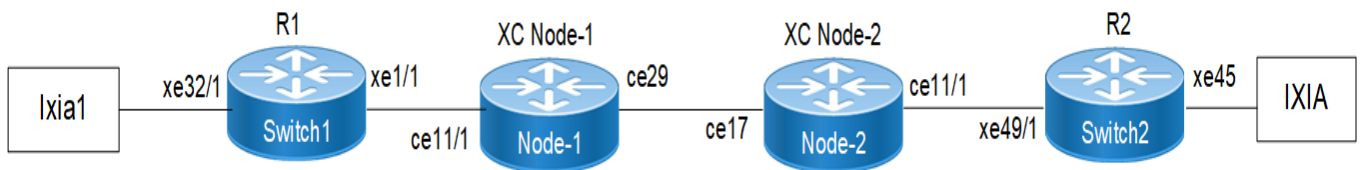


Figure 1-1: Cross-connect Topology-1

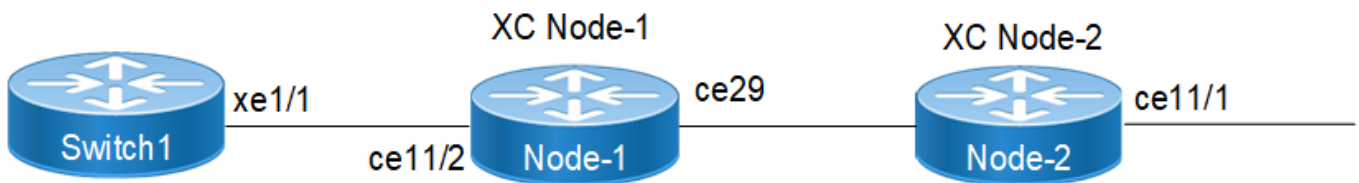


Figure 1-2: Cross-connect Topology-2

Configuration using Topology-1

The following configuration example will illustrate OSPF, BFD and BGP session establishments via Cross-connect:

R1

OcNOS#configure terminal	Enter into configure terminal
OcNOS(config)#hostname R1	Configure the host name
R1(config)#in xe1/1	Enter into interface level
R1(config-if)#ip address 10.10.10.1/24	Configure ip address to the interface
R1(config-if)#exit	Exiting from interface level
R1(config)#in xe32/1	Enter into interface mode
R1(config-if)#ip address 20.20.20.1/24	Configure ip address to the interface
R1(config-if)#exit	Exiting from interface level
R1(config)#interface lo	Enter into loop-back interface
R1(config-if)#ip address 1.1.1.1/24 secondary	Configuring secondary ip address
R1(config-if)#	Exiting the loop-back interface level
R1(config)#bfd interval 3 minrx 3 multiplier 3	Configuring bfd options
R1(config)#router ospf 10	Configuring OSPF process
R1(config-router)#router-id 1.1.1.1	Configuring router-id
R1(config-router)#network 10.10.10.0 0.0.0.255 area 0	Configuring Network id and Area id
R1(config-router)#redistribute connected	Configuring redistribute connected
R1(config-router)#bfd all-interfaces	Configuring bfd on all-interfaces
R1(config-router)#exit	Exiting the OSPF process
R1(config)#router bgp 100	Configuring bgp process
R1(config-router)#neighbor 10.10.10.2 remote-as 200	Configuring neighbor details
R1(config-router)#end	Exiting from the bgp process

XC Node-1

OcNOS#configure terminal	Entering into the configure terminal mode
OcNOS (config)#hostname Xc Node-1	Configuring the hostname
Xc Node-1(config)#interface ce29	Entering into interface level
Xc Node-1(config-if)#switchport	Configuring switchport
Xc Node-1(config-if)#exit	Exiting the interface level
Xc Node-1(config)#in ce11/1	Entering the interface level
Xc Node-1(config-if)#switchport	Configuring the switchport
Xc Node-1(config-if)#exit	Exiting the interface level
Xc Node-1(config)#cross-connect OSPF_BFD_BGP	Configuring the Cross-connect
Xc Node-1(config-XC)#ep1 ce11/1 ep2 ce29	Creating endpoints
Xc Node-1(config-XC)#end	Exiting cross-connect mode

Xc Node-2

OcNOS#configure terminal	Entering into the configure terminal mode
OcNOS (config)#hostname Xc Node-2	Configuring the hostname
Xc Node-2(config)#interface ce17	Entering into interface level
Xc Node-2(config-if)#switchport	Configuring switchport
Xc Node-2(config-if)#exit	Exiting the interface level
Xc Node-2(config)#interface ce11/1	Entering the interface level
Xc Node-2(config-if)#switchport	Configuring the switchport
Xc Node-2(config-if)#exit	Exiting the interface level
Xc Node-2(config)#cross-connect OSPF_BFD_BGP-1	Configuring the Cross-connect
Xc Node-2(config-XC)#ep1 ce17 ep2 ce11/1	Creating endpoints
Xc Node-2(config-XC)#end	Exiting cross-connect mode

R2

OcNOS#conf terminal	Enter into configure terminal
OcNOS (config)#hostname R2	Configure the host name
R2 (config)#in xe49/1	Enter into interface level
R2 (config-if)#ip address 10.10.10.2/24	Configure ip address to the interface
R2 (config-if)#exit	Exiting from interface level
R2 (config)#int xe45	Enter into interface mode
R2 (config-if)#ip address 30.30.30.1/24	Configure ip address to the interface
R2 (config-if)#exit	Exiting from interface level
R2 (config)#interface lo	Enter into loop-back interface
R2 (config-if)#ip address 2.2.2.2/24 secondary	Configuring secondary ip address
R2 (config-if)#exit	Exiting the loop-back interface level
R2 (config)#bfd interval 3 minrx 3 multiplier 3	Configuring bfd options
R2 (config)#router ospf 10	Configuring OSPF process
R2 (config-router)#router-id 2.2.2.2	Configuring router-id
R2 (config-router)#network 10.10.10.0 0.0.0.255 area 0	Configuring Network id and Area id
R2 (config-router)#redistribute connected	Configuring redistribute connected
R2 (config-router)#bfd all-interfaces	Configuring bfd on all-interfaces
R2 (config-router)#exit	Exiting the OSPF process
R2 (config)#router bgp 200	Configuring bgp process
R2 (config-router)#neighbor 10.10.10.1 remote-as 100	Configuring neighbor details
R2 (config-router)#end	Exiting from the bgp process

Validation

Cross-connect Validation:

```
Xc Node-1#sh cross-connect
cross-connect status
XC name          o-vlan i-vlan Ep1          Ep2          Admin-Status
-----+-----+-----+-----+-----+-----
OSPF_BFD_BGP    -      -      ce11/1      ce29         UP
-----+-----+-----+-----+-----+-----
cross-connect summary
Total : 1
Up    : 1
Down  : 0
Xc Node-1#
```

```
Xc Node-1#show running-config cross-connect
cross-connect OSPF_BFD_BGP
```



```
ep1 ce11/1 ep2 ce29
```

```
Xc Node-2#sh cross-connect
```

```
cross-connect status
```

XC name	o-vlan	i-vlan	Ep1	Ep2	Admin-Status
OSPF_BFD_BGP-1	-	-	ce17	ce11/1	UP

```
cross-connect summary
```

```
Total : 1
```

```
Up : 1
```

```
Down : 0
```

```
Xc Node-2#
```

```
Xc Node-2#show running-config cross-connect
```

```
cross-connect OSPF_BFD_BGP-1
```

```
ep1 ce17 ep2 ce11/1
```

OSPF Validation:

```
R1#show ip ospf neighbor
```

```
Total number of full neighbors: 1
```

```
OSPF process 10 VRF(default):
```

Neighbor ID	Pri	State	Dead Time	Address	Interface
2.2.2.2	1	Full/Backup	00:00:37	10.10.10.2	xe1/1

```
R1#
```

```
R2#show ip ospf neighbor
```

```
Total number of full neighbors: 1
```

```
OSPF process 10 VRF(default):
```

Neighbor ID	Pri	State	Dead Time	Address	Interface
1.1.1.1	1	Full/Backup	00:00:38	10.10.10.1	xe49/1

```
R2#
```

BFD Validation:

```
R1#show bfd interface xe1/1
```

```
Interface: xe1/1 ifindex: 10001 state: UP
```

```
Interface level configuration: NO ECHO, NO SLOW TMR
```

```
Min Tx: 3 Min Rx: 3 Multiplier: 3
```

```
R1#
```

```
R1#show bfd session
```

Cross-Connect (XC)

BFD process for VRF: (DEFAULT VRF)

```
=====
=====
Sess-Idx  Remote-Disc  Lower-Layer  Sess-Type  Sess-State  UP-Time  Interface
      Down-Reason  Remote-Addr
1          1          IPv4         Single-Hop  Up          00:02:54  xe1/1
      NA          10.10.10.2/32
Number of Sessions: 1
```

R1#show bfd session

BFD process for VRF: (DEFAULT VRF)

```
=====
=====
Sess-Idx  Remote-Disc  Lower-Layer  Sess-Type  Sess-State  UP-Time  Interface
      Down-Reason  Remote-Addr
1          1          IPv4         Single-Hop  Up          00:02:54  xe1/1
      NA          10.10.10.2/32
Number of Sessions: 1
```

R1#show bfd session detail

BFD process for VRF: (DEFAULT VRF)

```
=====
=====
Session Interface Index : 10001          Interface name :xe1/1
Session Index : 1
Lower Layer : IPv4                      Version : 1
Session Type : Single Hop                Session State : Up
Local Discriminator : 1                  Local Address : 10.10.10.1/32
Remote Discriminator : 1                 Remote Address : 10.10.10.2/32
Local Port : 49152                       Remote Port : 3784
Options :
```

Diagnostics : None

Timers in Milliseconds :

```
Min Tx: 3          Min Rx: 3          Multiplier: 3
Neg Tx: 3          Neg Rx: 3          Neg detect mult: 3
Min echo Tx: 1000  Min echo Rx: 1000  Neg echo intrvl: 0
```

Storage type : 2

Sess down time : 00:00:00

Sess Down Reason : NA

Bfd GTSM Disabled

Bfd Authentication Disabled

Counters values:

```
Pkt In : 000000000000000117138          Pkt Out : 000000000000000117172
Pkts Drop : 00000000000000000000          Auth Pkts Drop : 00000000000000000000
```

```

Echo Out : 00000000000000000000000000000000    IPv6 Echo Out : 00000000000000000000000000000000
IPv6 Pkt In : 00000000000000000000000000000000    IPv6 Pkt Out : 00000000000000000000000000000000
UP Count : 1                                         UPTIME : 00:05:42

```

Protocol Client Info:

```
OSPF-> Client ID: 4      Flags: 4
```

```
-----
Number of Sessions:    1
```

```
R1#
```

```
R2#show bfd interface xe49/1
```

```
Interface:      xe49/1  ifindex: 10049 state:   UP
Interface level configuration: NO ECHO, NO SLOW TMR
Min Tx: 3  Min Rx: 3  Multiplier: 3
```

```
R2#show bfd session
```

```
BFD process for VRF: (DEFAULT VRF)
```

```
=====
=====
```

Sess-Idx	Remote-Disc	Lower-Layer	Sess-Type	Sess-State	UP-Time	Interface
1	1	IPv4	Single-Hop	Up	00:04:12	xe49/1
	NA	10.10.10.1/32				

```
Number of Sessions:    1
```

```
R2#sh bfd session detail
```

```
BFD process for VRF: (DEFAULT VRF)
```

```
=====
=====
```

Session Interface Index : 10049	Interface name :xe49/1
Session Index : 1	
Lower Layer : IPv4	Version : 1
Session Type : Single Hop	Session State : Up
Local Discriminator : 1	Local Address : 10.10.10.2/32
Remote Discriminator : 1	Remote Address : 10.10.10.1/32
Local Port : 49152	Remote Port : 3784
Options :	

```
Diagnostics : None
```

```
Timers in Milliseconds :
```

```
Min Tx: 3           Min Rx: 3           Multiplier: 3
Neg Tx: 3           Neg Rx: 3           Neg detect mult: 3
```

Cross-Connect (XC)

Min echo Tx: 1000 Min echo Rx: 1000 Neg echo intrvl: 0
Storage type : 2
Sess down time : 00:00:00
Sess Down Reason : NA
Bfd GTSM Disabled
Bfd Authentication Disabled

Counters values:

Pkt In : 00000000000000044905	Pkt Out : 00000000000000044905
Pkts Drop : 00000000000000000000	Auth Pkts Drop : 00000000000000000000
Echo Out : 00000000000000000000	IPv6 Echo Out : 00000000000000000000
IPv6 Pkt In : 00000000000000000000	IPv6 Pkt Out : 00000000000000000000
UP Count : 1	UPTIME : 00:02:11

Protocol Client Info:

OSPF-> Client ID: 4 Flags: 4

Number of Sessions: 1

BGP Validation:

R1#sh bgp neighbors

BGP neighbor is 10.10.10.2, remote AS 200, local AS 100, external link
 BGP version 4, local router ID 10.10.10.1, remote router ID 2.2.2.2
 BGP state = Established, up for 00:04:00
 Last read 00:00:08, hold time is 90, keepalive interval is 30 seconds
 Neighbor capabilities:
 Route refresh: advertised and received (old and new)
 Address family IPv4 Unicast: advertised and received
 Received 11 messages, 0 notifications, 0 in queue
 Sent 12 messages, 0 notifications, 0 in queue
 Route refresh request: received 0, sent 0
 Minimum time between advertisement runs is 30 seconds
For address family: IPv4 Unicast
 BGP table version 1, neighbor version 1
 Index 1, Offset 0, Mask 0x2
 Community attribute sent to this neighbor (both)
 0 accepted prefixes
 0 announced prefixes

 Connections established 1; dropped 0
 Local host: 10.10.10.1, Local port: 179
 Foreign host: 10.10.10.2, Foreign port: 58033
 Next hop: 10.10.10.1
 Next hop global: ::
 Next hop local: ::
 BGP connection: non shared network

R2#sh ip bgp neighbors

BGP neighbor is 10.10.10.1, remote AS 100, local AS 200, external link

```

BGP version 4, local router ID 2.2.2.2, remote router ID 10.10.10.1
BGP state = Established, up for 00:00:03
Last read 00:00:03, hold time is 90, keepalive interval is 30 seconds
Neighbor capabilities:
  Route refresh: advertised and received (old and new)
  Address family IPv4 Unicast: advertised and received
Received 2 messages, 0 notifications, 0 in queue
Sent 2 messages, 0 notifications, 0 in queue
Route refresh request: received 0, sent 0
Minimum time between advertisement runs is 30 seconds
For address family: IPv4 Unicast
  BGP table version 1, neighbor version 1
  Index 1, Offset 0, Mask 0x2
  Community attribute sent to this neighbor (both)
  0 accepted prefixes
  0 announced prefixes

Connections established 1; dropped 0
Local host: 10.10.10.2, Local port: 58033
Foreign host: 10.10.10.1, Foreign port: 179
Nexthop: 10.10.10.2
Nexthop global: ::
Nexthop local: ::
BGP connection: non shared network
R2#

```

Show interface counters:

```
R1#sh interface counters rate gbps
```

Interface	Rx gbps	Rx pps	Tx gbps	Tx pps
xe1/1	6.91	13082945	6.91	13082949
xe32/1	6.91	13082325	6.91	13082325

```
R1#
```

```
Xc Node-1#sh interface counters rate gbps
```

Interface	Rx gbps	Rx pps	Tx gbps	Tx pps
ce11/1	6.91	13082437	6.91	13082437
ce29	6.91	13082457	6.91	13082458

```
Xc Node-1#
```

```
Xc Node-1# sh cross-connect
```

```
cross-connect status
```

XC name	o-vlan	i-vlan	Ep1	Ep2	Admin-Status
OSPF_BFD_BGP	-	-	ce11/1	ce29	UP

Cross-Connect (XC)

cross-connect summary

Total : 1

Up : 1

Down : 0

Xc Node-1#

Xc Node-2#sh interface counters rate gbps

Interface	Rx gbps	Rx pps	Tx gbps	Tx pps
cel1/1	6.91	13082428	6.91	13082429
cel17	6.91	13082381	6.91	13082378

Xc Node-2#sh cross-connect

cross-connect status

XC name	o-vlan	i-vlan	Ep1	Ep2	Admin-Status
OSPF_BFD_BGP-1	-	-	cel17	cel1/1	UP

cross-connect summary

Total : 1

Up : 1

Down : 0

Xc Node-2#

R2#sh interface counters rate gbps

Interface	Rx gbps	Rx pps	Tx gbps	Tx pps
xe45	6.91	13081988	6.91	13081988
xe49/1	6.91	13082339	6.91	13082339

R2#

Configuration using Topology-2

The following configuration example illustrates configuration of cross-connect using LAG interfaces on Xc Node:

Configuration on R1 Node:

R1# configure terminal	Enter configure mode
R1(config)#interface po100	Creating port channel interface
R1(config-if)#exit	Exit the interface level
R1(config)#interface xe1/1	Enter interface level
R1(config-if)# channel-group 100 mode active	Adding member port to the port channel interface
R1(config-if)#exit	Exit the interface level
R1(config)#interface xe1/2	Enter interface level
R1(config-if)# channel-group 100 mode active	Adding member port to the port channel interface
R1(config-if)#exit	Exit the interface level

Configuring Cross connect using dynamic lag interfaces on XC_node1:

XC_node1# configure terminal	Enter configure mode
XC_node1(config)#interface po100	Creating port channel interface
XC_node1(config-if)#switchport	Configuring Switchport to the interface
XC_node1(config-if)#exit	Exit the interface level
XC_node1(config)#interface po200	Creating port channel interface
XC_node1(config-if)#switchport	Configuring Switchport to the interface
XC_node1(config-if)#exit	Exit the interface level
XC_node1(config)#interface ce11/1	Enter interface level
XC_node1(config-if)# channel-group 100 mode active	Adding member port to the port channel interface
XC_node1(config-if)#exit	Exit the interface level
XC_node1(config)#interface ce11/2	Enter interface level
XC_node1(config-if)# channel-group 100 mode active	Adding member port to the port channel interface
XC_node1(config-if)#exit	Exit the interface level
XC_node1(config)#interface ce29	Enter interface level
XC_node1(config-if)# channel-group 200 mode active	Adding member port to the port channel interface
XC_node1(config-if)#exit	Exit the interface level
XC_node1(config)#interface ce30	Enter interface level
XC_node1(config-if)# channel-group 200 mode active	Adding member port to the port channel interface
XC_node1(config-if)#exit	Exit the interface level
XC_node1(config)#cross-connect lag	Create cross-connect by providing the name
XC_node1(config-XC)#ep1 po100 ep2 po200	Adding end-points ep1 and ep2 as lag interfaces
XC_node1(config-XC)#exit	Exit Cross-connect mode
XC_node1(config)#exit	Exit Configure terminal mode

Configuring Cross connect using dynamic lag interfaces on XC_node2:

XC_node2# configure terminal	Enter configure mode
XC_node2(config)#interface po200	Creating port channel interface
XC_node2(config-if)#switchport	Configuring Switchport to the interface
XC_node2(config-if)#exit	Exit the interface level
XC_node2(config)#interface ce29	Enter interface level
XC_node2(config-if)# channel-group 200 mode active	Adding member port to the port channel interface
XC_node2(config-if)#exit	Exit the interface level
XC_node2(config)#interface ce30	Enter interface level
XC_node2(config-if)# channel-group 200 mode active	Adding member port to the port channel interface
XC_node2(config-if)#exit	Exit the interface level
XC_node2(config)#interface ce11/1	Enter interface level
XC_node2(config-if)#Switchport	Configure switchport to the interface
XC_node2(config-if)#exit	Exit the interface level
XC_node2(config)#cross-connect lag	Create cross-connect by providing the name
XC_node2(config-XC)#ep1 po100 ep2 ce11/1	Adding end-points ep1 and ep2 as lag interfaces
XC_node2(config-XC)#exit	Exit Cross-connect mode
XC_node2(config)#exit	Exit Configure terminal mode

Validation

Cross-connect using Dynamic lag on XC_node1:

```
XC_node1#sh cross-connect
cross-connect status
XC name          o-vlan i-vlan Ep1          Ep2          Admin-Status
-----+-----+-----+-----+-----+-----
lag              -      -      po100       po200       UP
-----+-----+-----+-----+-----+-----
cross-connect summary
Total : 1
Up    : 1
Down  : 0

XC_node1#sh running-config cross-connect
!
cross-connect lag
 ep1 po100 ep2 po200
!
XC_node1#sh etherchannel summary
 Aggregator po100 100100
 Aggregator Type: Layer2
 Admin Key: 0100 - Oper Key 0100
```



```

Link: ce11/1 (5073) sync: 1
Link: ce11/2 (5074) sync: 1

```

```

-----
Aggregator po200 100200
Aggregator Type: Layer2
Admin Key: 0200 - Oper Key 0200
  Link: ce30 (5005) sync: 1
  Link: ce29 (5006) sync: 1

```

Cross-connect using Dynamic lag on XC_node2:

```
XC_node2#sh cross-connect
```

```
cross-connect status
```

XC name	o-vlan	i-vlan	Ep1	Ep2	Admin-Status
lag	-	-	po200	ce11/1	UP

```
cross-connect summary
```

```

Total : 1
Up    : 1
Down  : 0

```

```
XC Node-2#show running-config cross-connect
```

```
!
```

```
cross-connect lag
```

```
  ep1 po200 ep2 ce11/1
```

```
XC Node-2#sh etherchannel summary
```

```

Aggregator po200 100200
Aggregator Type: Layer2
Admin Key: 0200 - Oper Key 0200
  Link: ce18 (5009) sync: 1
  Link: ce17 (5010) sync: 1

```

Configuring Cross connect using Static lag interfaces:

Configuration on R1 Node:

R1# configure terminal	Enter configure mode
R1(config)#interface sa100	Creating Static lag interface
R1(config-if)#exit	Exit the interface level
R1(config)#interface xe1/1	Enter interface level
R1(config-if)# static-channel-group 100	Adding member port to the static lag interface
R1(config-if)#exit	Exit the interface level
R1(config)#interface xe1/2	Enter interface level
R1(config-if)# static-channel-group 100	Adding member port to the static lag interface
R1(config-if)#exit	Exit the interface level

Configuring Cross connect using static lag interfaces on XC_node1:

XC_node1# configure terminal	Enter configure mode
XC_node1(config)#interface sa100	Creating static lag interface
XC_node1(config-if)#switchport	Configuring Switchport to the interface
XC_node1(config-if)#exit	Exit the interface level
XC_node1(config)#interface sa200	Creating static lag interface
XC_node1(config-if)#switchport	Configuring Switchport to the interface
XC_node1(config-if)#exit	Exit the interface level
XC_node1(config)#interface ce11/1	Enter interface level
XC_node1(config-if)# static-channel-group 100	Adding member port to the static lag interface
XC_node1(config-if)#exit	Exit the interface level
XC_node1(config)#interface ce11/2	Enter interface level
XC_node1(config-if)# static-channel-group 100	Adding member port to the static interface
XC_node1(config-if)#exit	Exit the interface level
XC_node1(config)#interface ce29	Enter interface level
XC_node1(config-if)# static-channel-group 200	Adding member port to the static lag interface
XC_node1(config-if)#exit	Exit the interface level
XC_node1(config)#interface ce30	Enter interface level
XC_node1(config-if)# static-channel-group 200	Adding member port to the static lag interface
XC_node1(config-if)#exit	Exit the interface level
XC_node1(config)#cross-connect static-lag	Create cross-connect by providing the name
XC_node1(config-XC)#ep1 sa100 ep2 sa200	Adding end-points ep1 and ep2 as lag interfaces
XC_node1(config-XC)#exit	Exit Cross-connect mode
XC_node1(config)#exit	Exit Configure terminal mode

Configuring Cross connect using static lag interfaces on XC_node2:

XC_node2# configure terminal	Enter configure mode
XC_node2(config)#interface sa200	Creating static lag interface
XC_node2(config-if)#switchport	Configuring Switchport to the interface
XC_node2(config-if)#exit	Exit the interface level
XC_node2(config)#interface ce29	Enter interface level
XC_node2(config-if)# static-channel-group 200	Adding member port to the static lag interface
XC_node2(config-if)#exit	Exit the interface level
XC_node2(config)#interface ce30	Enter interface level
XC_node2(config-if)# static-channel-group 200	Adding member port to the static lag interface
XC_node2(config-if)#exit	Exit the interface level
XC_node2(config)#interface ce11/1	Enter interface level
XC_node2(config-if)#Switchport	Configure switchport to the interface
XC_node2(config-if)#exit	Exit the interface level
XC_node2(config)#cross-connect static-lag	Create cross-connect by providing the name
XC_node2(config-XC)#ep1 po200 ep2 ce11/1	Adding end-points ep1 and ep2 interfaces
XC_node2(config-XC)#exit	Exit Cross-connect mode
XC_node2(config)#exit	Exit Configure terminal mode

Validation

Cross-connect using Static Lag on XC_node1:

```
XC_node1#sh cross-connect
cross-connect status
XC name          o-vlan i-vlan Ep1          Ep2          Admin-Status
-----+-----+-----+-----+-----+-----
static-lag      -      -      sa100        sa200        UP
-----+-----+-----+-----+-----+-----
cross-connect summary
Total : 1
Up    : 1
Down  : 0
```

Cross-connect using Static Lag on XC_node2:

```
XC_node2#sh cross-connect
cross-connect status
XC name          o-vlan i-vlan Ep1          Ep2          Admin-Status
-----+-----+-----+-----+-----+-----
static-lag      -      -      sa200        ce11/1       UP
-----+-----+-----+-----+-----+-----
```

```
cross-connect summary
```

```
Total : 1
```

```
Up      : 1
```

```
Down   : 0
```

Disable the Cross-connect on XC node1:

Xc Node-1# configure terminal	Enter configure mode
Xc Node-1(config)#cross-connect lag	Enter into cross-connect mode
Xc Node-1(config-XC)#disable	Disabling the cross-connect
Xc Node-1(config-XC)# exit	Exit the cross-connect

Validation:

Disable the cross-connect on XC node1:

```
Xc Node-1#sh cross-connect
```

```
cross-connect status
```

XC name	o-vlan	i-vlan	Ep1	Ep2	Admin-Status
lag	-	-	po100	po200	DOWN

```
cross-connect summary
```

```
Total : 1
```

```
Up      : 0
```

```
Down   : 1
```

Enable the Cross-connect XC_node1:

Xc Node-1# configure terminal	Enter configure mode
Xc Node-1(config)#cross-connect lag	Enter into cross-connect mode
Xc Node-1(config-XC)#no disable	Enable the cross-connect
Xc Node-1(config-XC)#exit	Exit the cross-connect

Validation:

Cross-connect after enable on XC_node1:

```
Xc Node-1#sh cross-connect
```

```
cross-connect status
```

XC name	o-vlan	i-vlan	Ep1	Ep2	Admin-Status
lag	-	-	po100	po200	UP

```
cross-connect summary
```

```
Total : 1
```

```
Up      : 1
```

```
Down   : 0
```


CHAPTER 2 Cross-Connect (XC) Resiliency

This Chapter contains the cross-connect resiliency configuration example.

This feature provides resiliency support for port level cross connect when primary link goes down. Whenever, any of the endpoint (EP) of cross-connect goes down, pre-configured backup EP will be chosen and cross-connect will be up with backup EP. Same backup EP cannot be used in another cross-connect link.

The following are the types of EPs supported as backup EPs.

1. Native Ethernet interface
2. LAG interface

Topology

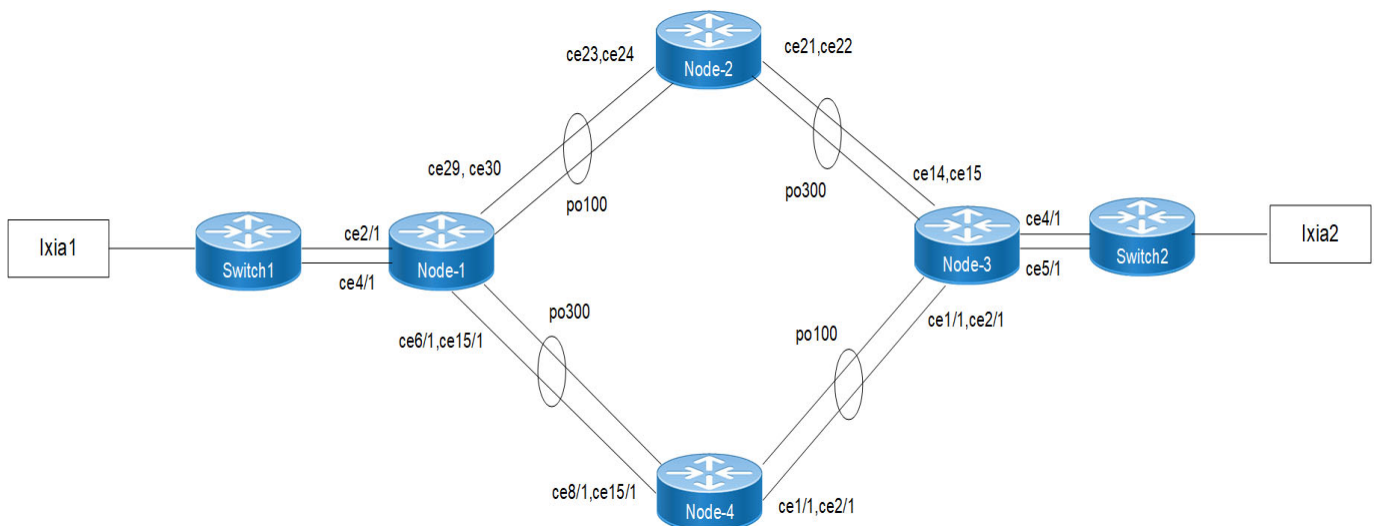


Figure 2-3: Cross-connect Resiliency Topology

LFPT (Link-Fault-Pass-Through)

If one endpoint goes down, other endpoint of the link is notified and port status is shown as DOWN.

Example: If po100 interface of Node-1 goes down, then Node-2 will inform to Node-3 via LFPT to down the po300 interface.

Revertive

When primary EP comes up, then traffic need to switch from backup EP to Primary EP.

Example: Suppose po100 is down on Node-1, the traffic flow is send to backup EP po300. Whenever the po100 comes up on Node-1 then the traffic flow is switched from backup EP po300 to primary EP po100.

Node-1

#configure terminal	Enter configure mode
(config)#hostname Node-1	Configure the hostname
(config)#interface po100	Create port channel interface
(config-if)#switchport	Configure switchport on LAG port
(config-if)#exit	Exit the interface level
(config)#interface ce29	Enter interface level
(config-if)#channel-group 100 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface ce30	Enter interface level
(config-if)#channel-group 100 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface po300	Create port channel interface
(config-if)#switchport	Configure switchport on LAG interface
(config-if)#exit	Exit the interface level
(config)#interface ce6/1	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface ce15/1	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface ce2/1	Enter interface level
(config-if)#switchport	Configure switchport
(config)#interface ce4/1	Enter interface level
(config-if)#switchport	Configure switchport
(config-if)#exit	Exit the interface level
(config)#cross-connect sample	Create cross-connect by providing the name
(config-XC)#ep1 po100 ep2 ce2/1	Add end-points end-point1 and end-point2
(config-XC)#backup ep1 po300	Add backup end-point1
(config-XC)#backup ep2 ce4/1	Add backup end-point2
(config-XC)#cross-connect switchover type revertive	Configure revertive mode
(config-XC)#link-fault-pass-through enable	Configure LFPT

Node-2

#configure terminal	Enter configure mode
(config)#hostname Node-2	Configure the hostname
(config)#interface po100	Create port channel interface
(config-if)#switchport	Configure switchport on LAG port
(config-if)#exit	Exit the interface level
(config)#interface ce23	Enter interface level
(config-if)#channel-group 100 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface ce24	Enter interface level
(config-if)#channel-group 100 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface po300	Create port channel interface
(config-if)#switchport	Configure switchport on LAG interface
(config-if)#exit	Exit the interface level
(config)#interface ce21	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface ce22	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#cross-connect sample2	Create cross-connect by providing the name
(config-XC)#ep1 po100 ep2 po300	Add end-points end-point1 and end-point2
(config-XC)#link-fault-pass-through enable	Configure LFPT

Node-3

#configure terminal	Enter configure mode
(config)#hostname Node-3	Configure the hostname
(config)#interface po300	Create port channel interface
(config-if)#switchport	Configure switchport on LAG port
(config-if)#exit	Exit the interface level
(config)#interface ce13	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level

Cross-Connect (XC) Resiliency

(config)#interface ce14	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface po100	Create port channel interface
(config-if)#switchport	Configure switchport on LAG interface
(config-if)#exit	Exit the interface level
(config)#interface ce1/1	Enter interface level
(config-if)#channel-group 100 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface ce2/1	Enter interface level
(config-if)#channel-group 100 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface ce4/1	Enter interface level
(config-if)#switchport	Configure switchport
(config)#interface ce5/1	Enter interface level
(config-if)#switchport	Configure switchport
(config-if)#exit	Exit the interface level
(config)#cross-connect sample3	Create cross-connect by providing the name
(config-XC)#ep1 po300 ep2 ce4/1	Add end-points end-point1 and end-point2
(config-XC)#backup ep1 po100	Add backup end-point1
(config-XC)#backup ep2 ce5/1	Add backup end-point2
(config-XC)#cross-connect switchover type revertive	Configure revertive mode
(config-XC)#link-fault-pass-through enable	Configure LFPT

Node-4

#configure terminal	Enter configure mode
(config)#hostname Node-4	Configure the hostname
(config)#interface po100	Create port channel interface
(config-if)#switchport	Configure switchport on LAG port
(config-if)#exit	Exit the interface level
(config)#interface ce1/1	Enter interface level
(config-if)#channel-group 100 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface ce2/1	Enter interface level
(config-if)#channel-group 100 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short

(config-if)#exit	Exit the interface level
(config)#interface po300	Create port channel interface
(config-if)#switchport	Configure switchport on LAG interface
(config-if)#exit	Exit the interface level
(config)#interface ce8/1	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface ce15/1	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#cross-connect sample4	Create cross-connect by providing the name
(config-XC)#ep1 po300 ep2 po100	Add end-points end-point1 and end-point2
(config-XC)#link-fault-pass-through enable	Configure LFPT

Validation

Cross-connect using Dynamic LAG on Node-1

```

Node-1#sh etherchannel summary
  Aggregator po100 100100
  Aggregator Type: LayeNode-2
  Admin Key: 0100 - Oper Key 0100
    Link: ce29 (5073) sync: 1
    Link: ce30 (5074) sync: 1
-----
  Aggregator po300 100300
  Aggregator Type: LayeNode-2
  Admin Key: 0300 - Oper Key 0300
    Link: ce6/1 (5005) sync: 1
    Link: ce15/1 (5006) sync: 1

Node-1#sh running-config cross-connect
!
cross-connect sample
ep1 po100 ep2 ce2/1
cross-connect switchover type revertive
link-fault-pass-through enable
backup ep1 po300
backup ep2 ce4/1
!

Node-1#sh cross-connect
Codes: EP - Endpoint, Bkp_EP - Backup endpoint
      * - Active Endpoint, none - not configured
Cross-connect name : sample

```

Cross-Connect (XC) Resiliency

```
EP1:po100      EP2:ce2/1      Revertive:Yes      Bkp_EP1:po300      Bkp_EP2:ce4/1
Admin Status:UP      Oper Status:UP
```

```
=====
=====+
| EP      | OVID    | IVID    | Rx packets  | Rx bytes    | Tx packets  | Tx bytes
|Interface Status|
=====+
| EP1*   | -      | -      | 0           | 0           | 5974137342
|764688374912 |UP      |
| EP2*   | -      | -      | 5973605019 | 764619747456 | 0           | 0
|UP      |
| bkp_EP1 | -      | -      | 5973879754 | 764654827904 | 0           | 0
|UP      |
| bkp_EP2 | -      | -      | 0          | 0           | 0           | 0
|UP      |
=====+
=====
```

cross-connect summary

```
Total XC      : 1
Admin Up       : 1
Admin Down     : 0
Total Rules    : 1
```

Cross-connect using Dynamic LAG on Node-2

```
Node-2#sh etherchannel summary
```

```
Aggregator po100 100100
Aggregator Type: LayeNode-2
Admin Key: 0100 - Oper Key 0100
  Link: ce23 (5067) sync: 1
  Link: ce24 (5068) sync: 1
```

```
-----
Aggregator po300 100300
Aggregator Type: LayeNode-2
Admin Key: 0300 - Oper Key 0300
  Link: ce21 (5063) sync: 1
  Link: ce22 (5064) sync: 1
```

```
Node-2#show running-config cross-connect
```

```
!
cross-connect sample2
!
cross-connect sample2
  ep1 po100 ep2 po300
  link-fault-pass-through enable
!
```

```
Node-2#sh cross-connect
```

```
Codes: EP - Endpoint, Bkp_EP - Backup endpoint
      * - Active Endpoint, none - not configured
Cross-connect name : sample2
```

```

EP1:po100      EP2:po300      Revertive:No      Bkp_EP1:None      Bkp_EP2:None
Admin Status:UP      Oper Status:UP
=====+
| EP      | OVID    | IVID    | Rx packets  | Rx bytes   | Tx packets  | Tx bytes
|Interface Status|
=====+
| EP1*   | -      | -      | 3710       | 470780    | 723         | 90626
|UP      |        |        |            |           |            |
| EP2*   | -      | -      | 72         | 6468      | 14          | 1548
|UP      |        |        |            |           |            |
=====+
=====+

```

cross-connect summary

```

Total XC      : 1
Admin Up      : 1
Admin Down    : 0
Total Rules   : 1

```

Cross-connect using Dynamic LAG on Node-3

```

Node-3#sh etherchannel summary
  Aggregator po100 100100
  Aggregator Type: LayeNode-2
  Admin Key: 0100 - Oper Key 0100
    Link: ce1/1 (5005) sync: 1
    Link: ce2/1 (5006) sync: 1
-----

```

```

  Aggregator po300 100300
  Aggregator Type: LayeNode-2
  Admin Key: 0300 - Oper Key 0300
    Link: ce13 (5011) sync: 1
    Link: ce14 (5012) sync: 1

```

Node-3#sh running-config cross-connect

```

!
cross-connect sample3
  ep1 po300 ep2 ce4/1
  cross-connect switchover type revertive
  link-fault-pass-through enable
  backup ep1 po100
  backup ep2 ce5/1
!

```

Node-3#sh cross-connect

```

Codes: EP - Endpoint, Bkp_EP - Backup endpoint
      * - Active Endpoint, none - not configured
Cross-connect name : sample3
EP1:po300      EP2:ce4/1      Revertive:Yes      Bkp_EP1:po100      Bkp_EP2:ce5/1
Admin Status:UP      Oper Status:UP

```

Cross-Connect (XC) Resiliency

```
=====+
=====+
| EP      | OVID   | IVID   | Rx packets | Rx bytes  | Tx packets | Tx bytes
|Interface Status|
=====+
=====+
| EP1*    | -      | -      | 201        | 13536     | 83318167485
|10664725404928 |UP      |
| EP2*    | -      | -      | 93501105144 | 11968141426060 | 2          | 128
|UP       |
| bkp_EP1 | -      | -      | 0          | 0         | 10171776397
|1301987373312 |UP      |
| bkp_EP2 | -      | -      | 93501187674 | 11968152089344 | 0          | 0
|UP       |
=====+
=====+
```

cross-connect summary

```
Total XC      : 1
Admin Up       : 1
Admin Down     : 0
Total Rules    : 1
```

Cross-connect using Dynamic LAG on Node-4

Node-4#sh etherchannel summary

```
Aggregator po100 100100
Aggregator Type: LayeNode-2
Admin Key: 0100 - Oper Key 0100
  Link: ce1/1 (5005) sync: 1
  Link: ce2/1 (5006) sync: 1
```

```
-----
Aggregator po300 100300
Aggregator Type: LayeNode-2
Admin Key: 0300 - Oper Key 0300
  Link: ce8/1 (5009) sync: 1
  Link: ce15/1 (5012) sync: 1
```

Node-4#sh running-config cross-connect

```
!
cross-connect sample4
ep1 po300 ep2 po100
link-fault-pass-through enable
!
```

Disable the Cross-connect on Node-1

```
=====+
#configure terminal                               Enter configure mode
(config)#cross-connect sample                     Enter into cross-connect mode
(config-XC)#disable                               Disabling the cross-connect
(config-XC)#exit                                 Exit the cross-connect
=====+
```

Validation

Disable the cross-connect on Node-1

```
Node-1#sh cross-connect
Codes: EP - Endpoint, Bkp_EP - Backup endpoint
      * - Active Endpoint, none - not configured
Cross-connect name : sample
EP1:po100      EP2:ce2/1      Revertive:Yes      Bkp_EP1:po300      Bkp_EP2:ce4/1
Admin Status:DOWN      Oper Status:DOWN
+=====+
| EP      | OVID    | IVID    | Rx packets  | Rx bytes    | Tx packets  | Tx bytes
|Interface Status|
+=====+
| EP1*   | -      | -      | 0           | 0           | 5974137342
|764688374912 |UP
| EP2*   | -      | -      | 5973605019  | 764619747456 | 0           | 0
|UP
| bkp_EP1 | -      | -      | 5973879754  | 764654827904 | 0           | 0
|UP
| bkp_EP2 | -      | -      | 0           | 0           | 0           | 0
|UP
+=====+
=====+
```

```
cross-connect summary
Total XC      : 1
Admin Up     : 0
Admin Down   : 1
Total Rules  : 0
```

Enable the Cross-connect Node-1

#configure terminal	Enter configure mode
(config)#cross-connect sample	Enter into cross-connect mode
(config-XC)#no disable	Enable the cross-connect
(config-XC)#exit	Exit the cross-connect

Validation

Cross-connect after enable on Node-1

```
Node-1#sh cross-connect
Codes: EP - Endpoint, Bkp_EP - Backup endpoint
      * - Active Endpoint, none - not configured
Cross-connect name : sample
EP1:po100      EP2:ce2/1      Revertive:Yes      Bkp_EP1:po300      Bkp_EP2:ce4/1
Admin Status:UP      Oper Status:UP
+=====+
=====+
| EP      | OVID    | IVID    | Rx packets  | Rx bytes    | Tx packets  | Tx bytes
|Interface Status|
+=====+
| EP1*   | -      | -      | 0           | 0           | 5974137342
|764688374912 |UP
| EP2*   | -      | -      | 5973605019  | 764619747456 | 0           | 0
|UP
| bkp_EP1 | -      | -      | 5973879754  | 764654827904 | 0           | 0
|UP
| bkp_EP2 | -      | -      | 0           | 0           | 0           | 0
|UP
+=====+
=====+
```

Cross-Connect (XC) Resiliency

```
+=====+
=====+
| EP1*      |      -      |      -      | 0          | 0          | 5974137342
|764688374912 |UP          |              |              |              |
| EP2*      |      -      |      -      | 5973605019 | 764619747456 | 0          | 0
|UP          |              |              |              |              |
| bkp_EP1   |      -      |      -      | 5973879754 | 764654827904 | 0          | 0
|UP          |              |              |              |              |
| bkp_EP2   |      -      |      -      | 0          | 0          | 0          | 0
|UP          |              |              |              |              |
+=====+
=====+
```

cross-connect summary

```
Total XC      : 1
Admin Up       : 1
Admin Down     : 0
Total Rules    : 1
```


CHAPTER 3 CFM over xConnect Configuration

This chapter contains a complete example of CFM over xConnect configuration.

The main objective of this feature is to achieve L2 resiliency using CFM over xConnect where the traffic is switched to the next available link within xConnect when CFM detects errors or link failure on the monitored link in DC platforms.

Topology

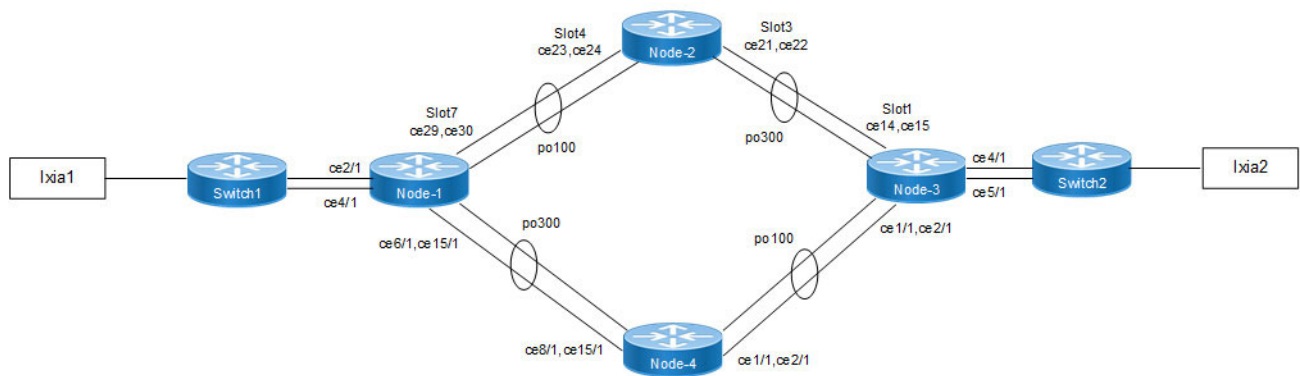


Figure 3-4: CFM over xConnect Topology

Configuration

Node-1

#configure terminal	Enter configure mode
(config)# hostname Node-1	Configure the hostname.
(config)#interface po100	Create port channel interface.
(config-if)#switchport	Configure switchport on LAG port
(config-if)#exit	Exit the interface level
(config)#interface ce29	Enter interface level
(config-if)#channel-group 100 mode active	Add member port to the port channel interface.
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface ce30	Enter interface level

CFM over xConnect Configuration

(config-if)#channel-group 100 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface po300	Create port channel interface
(config-if)#switchport	Configure switchport on LAG interface
(config-if)#exit	Exit the interface level
(config)#interface ce6/1	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface ce15/1	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface ce2/1	Enter interface level
(config-if)#switchport	Configure switchport
(config)#interface ce4/1	Enter interface level
(config-if)#switchport	Configure switchport
(config-if)#exit	Exit the interface level
(config)#cross-connect xc1	Create cross-connect by providing the name
(config-XC)#ep1 po100 ep2 ce2/1	Add end-points end-point1 and end-point2
(config-XC)#backup ep1 po300	Add backup end-point1
(config-XC)#backup ep2 ce4/1	Add backup end-point2
(config-XC)#exit	Exit XC mode
(config)#ethernet cfm domain-type character-string domain-name mdnam1 level 0 mip-creation none	Create CFM domain with type as character string with level 0 and set MIP creation criteria to none.
(config-ether-cfm)#service ma-type string ma-name test1	Create ma type as string
(config-ether-cfm-ma)#link-level-ma	Configure link-level-ma
(config-ether-cfm-ma)#ethernet cfm mep down mpid 1 active true po100	Create down MEP for local-VID on po100
(config-ether-cfm-ma-mep)#cc multicast state enable	Enable cc multicast
(config-ether-cfm-ma-mep)#exit-ether-ma-mep-mode	Exit ethernet cfm ma-mep mode
(config-ether-cfm-ma)#mep crosscheck mpid 2	Configure crosscheck to remote MEP
(config-ether-cfm-ma)#cc interval 10ms	Enable cc interval for 10 millisecond
(config-ether-cfm-ma)#exit-ether-ma-mode	Exit ethernet ma mode
(config-ether-cfm)#exit	Exit ethernet CFM mode
(config)#ethernet cfm domain-type character-string domain-name mdnam2 level 0 mip-creation none	Create CFM domain with type as character string with level 0 and set MIP creation criteria to none.

(config-ether-cfm)#service ma-type string ma-name test2	Create MA type as string
(config-ether-cfm-ma)#link-level-ma	Configure link-level-ma
(config-ether-cfm-ma)#ethernet cfm mep down mpid 3 active true po300	Create down MEP for local-VID on po300
(config-ether-cfm-ma-mep)#cc multicast state enable	Enable CC multicast
(config-ether-cfm-ma-mep)#exit-ether-ma- mep-mode	Exit ethernet CFM MA-MEP mode
(config-ether-cfm-ma)#mep crosscheck mpid 4	Configure crosscheck to remote MEP
(config-ether-cfm-ma)#cc interval 10ms	Enable CC interval for 10 millisecond
(config-ether-cfm-ma)#exit-ether-ma-mode	Exit ethernet MA mode
(config-ether-cfm)#exit	Exit ethernet CFM mode

Node-2

#configure terminal	Enter configure mode
(config)#hostname Node-2	Configure the hostname
(config)#interface po100	Create port channel interface
(config-if)#switchport	Configure switchport on LAG port
(config-if)#exit	Exit the interface level
(config)#interface ce23	Enter interface level
(config-if)#channel-group 100 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level.
(config)#interface ce24	Enter interface level
(config-if)#channel-group 100 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface po300	Create port channel interface
(config-if)#switchport	Configure switchport on LAG interface
(config-if)#exit	Exit the interface level
(config)#interface ce21	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface ce22	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#cross-connect xc1	Create cross-connect by providing the name
(config-XC)#ep1 po100 ep2 po300	Add end-points end-point1 and end-point2

Node-3

#configure terminal	Enter configure mode
(config)#hostname Node-3	Configure the hostname
(config)#interface po300	Create port channel interface
(config-if)#switchport	Configure switchport on LAG port
(config-if)#exit	Exit the interface level
(config)#interface ce13	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level.
(config)#interface ce14	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface po100	Create port channel interface
(config-if)#switchport	Configure switchport on LAG interface
(config-if)#exit	Exit the interface level
(config)#interface ce1/1	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface ce2/1	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface ce4/1	Enter interface level
(config-if)#switchport	Configure switchport
(config)#interface ce5/1	Enter interface level
(config-if)#switchport	Configure switchport
(config-if)#exit	Exit the interface level
(config)#cross-connect xc1	Create cross-connect by providing the name
(config-XC)#ep1 po300 ep2 ce4/1	Add end-points end-point1 and end-point2
(config-XC)#backup ep1 po100	Add backup end-point1
(config-XC)#backup ep2 ce5/1	Add backup end-point2
(config-XC)#exit	Exit XC mode
(config)#ethernet cfm domain-type character-string domain-name mdnam1 level 0 mip-creation none	Create cfm domain with type as character string with level 0 and set mip creation criteria to none.
(config-ether-cfm)#service ma-type string ma-name test1	Create ma type as string
(config-ether-cfm-ma)#link-level-ma	Configure link-level-ma

(config-ether-cfm-ma)#ethernet cfm mep down mpid 2 active true po300	Create down mep for local-vid on po100
(config-ether-cfm-ma-mep)#cc multicast state enable	Enable cc multicast
(config-ether-cfm-ma-mep)#exit-ether-ma-mep-mode	Exit ethernet cfm ma-mep mode
(config-ether-cfm-ma)#mep crosscheck mpid 1	Configure crosscheck to remote MEP
(config-ether-cfm-ma)#cc interval 10ms	Enable cc interval for 10 millisecond
(config-ether-cfm-ma)#exit-ether-ma-mode	Exit ethernet ma mode
(config-ether-cfm)#exit	Exit ethernet CFM mode
(config)#ethernet cfm domain-type character-string domain-name mdnam2 level 0 mip-creation none	Create cfm domain with type as character string with level 0 and set mip creation criteria to none.
(config-ether-cfm)#service ma-type string ma-name test2	Create ma type as string
(config-ether-cfm-ma)#link-level-ma	Configure link-level-ma
(config-ether-cfm-ma)#ethernet cfm mep down mpid 4 active true po100	Create down mep for local-vid on po300
(config-ether-cfm-ma-mep)#cc multicast state enable	Enable cc multicast
(config-ether-cfm-ma-mep)#exit-ether-ma-mep-mode	Exit ethernet cfm ma-mep mode
(config-ether-cfm-ma)#mep crosscheck mpid 3	Configure crosscheck to remote MEP
(config-ether-cfm-ma)#cc interval 10ms	Enable cc interval for 10 millisecond
(config-ether-cfm-ma)#exit-ether-ma-mode	Exit ethernet ma mode
(config-ether-cfm)#exit	Exit ethernet CFM mode

Node-4

#configure terminal	Enter configure mode
(config)#hostname Node-4	Configure the hostname
(config)#interface po100	Create port channel interface
(config-if)#switchport	Configure switchport on LAG port
(config-if)#exit	Exit the interface level
(config)#interface ce1/1	Enter interface level
(config-if)#channel-group 100 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level.
(config)#interface ce2/1	Enter interface level
(config-if)#channel-group 100 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface po300	Create port channel interface
(config-if)#switchport	Configure switchport on LAG interface
(config-if)#exit	Exit the interface level

(config)#interface ce8/1	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#interface ce15/1	Enter interface level
(config-if)#channel-group 300 mode active	Add member port to the port channel interface
(config-if)#lacp timeout short	Configure LACP timeout as short
(config-if)#exit	Exit the interface level
(config)#cross-connect xc1	Create cross-connect by providing the name
(config-XC)#ep1 po300 ep2 po100	Add end-points end-point1 and end-point2

Validation

Node-1

```
#sh ethernet cfm maintenance-points local mep domain mdnam2 ma-name test2
```

```
MPID Dir Lvl VLAN CC-Stat CC-Intvl MAC-Address Def Port MD Name
```

```
-----
3 Dn 0 0 Enable 10 ms 34ef.b689.e05a T po300 mdnam2
```

```
#sh ethernet cfm maintenance-points local mep domain mdnam1 ma-name test1
```

```
MPID Dir Lvl VLAN CC-Stat CC-Intvl MAC-Address Def Port MD Name
```

```
-----
1 Dn 0 0 Enable 10 ms 34ef.b689.e020 F po100 mdnam1
```

```
#sh ethernet cfm maintenance-points remote mpid 3 domain mdnam2
```

```
MEPID RMEPID LEVEL VLAN Rx CCM RDI PEER-MAC TYPE
```

```
-----
3 4 0 0 Yes False 5cff.35b7.54b3 Configured
```

```
#sh ethernet cfm maintenance-points remote mpid 1 domain mdnam1
```

```
MEPID RMEPID LEVEL VLAN Rx CCM RDI PEER-MAC TYPE
```

```
-----
1 2 0 0 Yes False 5cff.35b7.54bb Configured
```

```
#sh ethernet cfm errors domain mdnam1
```

```
Domain Name Level Vlan MEPID Defects
```

```
-----
mdnam1 0 0 1 .....
```

```
1. defRDICCM 2. defMACstatus 3. defRemoteCCM
```

```
4. defErrorCCM 5. defXconCCM
```

```
#sh ethernet cfm errors domain mdnam2
```

```
Domain Name Level Vlan MEPID Defects
```

```
-----
mdnam2 0 0 3 .....
```

```
1. defRDICCM      2. defMACstatus  3. defRemoteCCM
4. defErrorCCM   5. defXconCCM
```

Node-3

```
#sh ethernet cfm maintenance-points local mep domain mdnam1 ma-name test1
```

```
MPID Dir Lvl VLAN CC-Stat  CC-Intvl MAC-Address  Def Port  MD Name
```

```
-----
2     Dn  0   0   Enable  10 ms   5cff.35b7.54bb F   po300 mdnam1
```

```
#sh ethernet cfm maintenance-points local mep domain mdnam2 ma-name test2
```

```
MPID Dir Lvl VLAN CC-Stat  CC-Intvl MAC-Address  Def Port  MD Name
```

```
-----
4     Dn  0   0   Enable  10 ms   5cff.35b7.54b3 F   po100 mdnam2
```

```
#sh ethernet cfm maintenance-points remote mpid 4 domain mdnam2
```

```
MEPID      RMEPID      LEVEL      VLAN      Rx CCM      RDI      PEER-MAC      TYPE
```

```
-----
4           3           0           0           Yes         False    34ef.b689.e05a Configured
```

```
#sh ethernet cfm maintenance-points remote mpid 2 domain mdnam1
```

```
MEPID      RMEPID      LEVEL      VLAN      Rx CCM      RDI      PEER-MAC      TYPE
```

```
-----
2           1           0           0           Yes         False    34ef.b689.e020 Configured
```

```
#sh ethernet cfm errors domain mdnam1
```

```
Domain Name      Level      Vlan      MEPID      Defects
```

```
-----
mdnam1           0           0           2           .....
```

```
1. defRDICCM      2. defMACstatus  3. defRemoteCCM
4. defErrorCCM   5. defXconCCM
```

```
#sh ethernet cfm errors domain mdnam2
```

```
Domain Name      Level      Vlan      MEPID      Defects
```

```
-----
mdnam2           0           0           4           .....
```

```
1. defRDICCM      2. defMACstatus  3. defRemoteCCM
4. defErrorCCM   5. defXconCCM
```


Layer 1 Command Reference

CHAPTER 1 Port Based xConnect Commands

This chapter contains the port based xConnect commands.

- `backup`
- `cross-connect`
- `cross-connect switchover type revertive`
- `disable`
- `ep1 <interface_name> ep2 <interface_name>`
- `link-fault-pass-through enable`
- `show cross-connect`

backup

Use this command to configure backup for primary endpoints.

Use `no` form of this command to unconfigure backup for primary endpoint.

Command Syntax

```
backup (ep1|ep2) IFNAME
no backup (ep1|ep2)
```

Parameters

IFNAME	Interface name for backup endpoint
--------	------------------------------------

Default

None

Command Mode

Configure-XC mode

Applicability

This command was introduced in OcNOS-DC version 2.0.

Example

```
#configure terminal
(config)#cross-connect temp
(config-XC)#backup ep1 xe35

(config-XC)#no backup ep1
```

cross-connect

Use this command to provide name for a xConnect. This command will change mode from config to cross-connect mode.

Command Syntax

```
cross-connect <xc-name>
```

Parameters

<code>xc-name</code>	Cross-connect name
----------------------	--------------------

Default

None

Command Mode

Configure mode

Applicability

This command was introduced in OcNOS-DC version 2.0

Example

```
#configure terminal
(config)#cross-connect temp
(config-XC)#
```

cross-connect switchover type revertive

Use this command to configure revertive mode for cross-connect.

Use the no form of this command to make it non-revertive mode for cross-connect.

Command Syntax

```
cross-connect switchover type revertive
no cross-connect switchover type revertive
```

Parameters

None

Default

Non-revertive by default.

Command Mode

Configure-XC mode

Applicability

This command was introduced in OcNOS-DC version 2.0.

Example

```
#configure terminal
(config)#cross-connect temp
(config-XC)#cross-connect switchover type revertive
(config-XC)#no cross-connect switchover type revertive
```

disable

Use this command to do admin shutdown on a cross-connect.

Use the `no` form of this command to enable cross-connect.

Command Syntax

```
disable
no disable
```

Parameters

None

Default

By default, the cross-connect will be enabled.

Command Mode

Configure-XC mode

Applicability

This command was introduced in OcNOS-DC version 2.0

Example

```
#configure terminal
(config)#cross-connect temp
(config-XC)#disable
(config-XC)#no disable
```

ep1 <interface_name> ep2 <interface_name>

Use this command to configure xConnect between two endpoints.

Command Syntax

```
ep1 IFNAME1 ep2 IFNAME2
```

Parameters

IFNAME1	Interface name for ep1
IFNAME2	Interface name for ep2

Default

None

Command Mode

Configure-XC mode

Applicability

This command was introduced in OcNOS-DC version 2.0.

Example

```
#configure terminal
(config)#cross-connect temp
(config-XC)#ep1 xe33 ep2 xe34
```

link-fault-pass-through enable

Use this command to enable LFPT in the cross-connect.

Use the `no` form of this command to disable LFPT.

Command Syntax

```
link-fault-pass-through enable
no link-fault-pass-through enable
```

Parameters

None

Default

LFPT is disabled by default.

Command Mode

Configure-XC mode

Applicability

This command was introduced in OcNOS-DC version 2.0.

Example

```
#configure terminal
(config)#cross-connect temp
(config-XC)#link-fault-pass-through enable
(config-XC)#no link-fault-pass-through enable
```

show cross-connect

Use this command to show cross-connect entry.

Command Syntax

```
show cross-connect (name WORD| count|)
```

Parameters

WORD	Cross-connect name
count	Cross-connect count

Default

None

Command Mode

Exec mode

Applicability

This command was introduced in OcNOS-DC version 2.0.

Example

```
OcNOS#sh cross-connect
```

```
Cross-connect name : temp
EP1:ce13/1      EP2:ce4/1      Revertive:No      Bkp_EP1:ce14/1      Bkp_EP2:ce15/1
Admin Status:UP      Oper Status:UP
```

```

=====
=====+
| EP      | OVID    | IVID    | Rx packets | Rx bytes | Tx packets | Tx bytes
|Interface Status|
=====+
| EP1*   | -      | -      | 177629    | 12078772 | 0         | 0
|UP      |      |      |
| EP2*   | -      | -      | 0         | 0         | 177633    | 12079044
|UP      |      |      |
| bkp_EP1 | -      | -      | 0         | 0         | 0         | 0
|UP      |      |      |
| bkp_EP2 | -      | -      | 0         | 0         | 0         | 0
|UP      |      |      |
=====
=====+

```

```
cross-connect summary
```

```
Total XC      : 1
Admin Up       : 1
Admin Down     : 0
Total Rules    : 1
```

OcNOS#sh cross-connect temp

Cross-connect name : temp

EP1:ce13/1 EP2:ce4/1 Revertive:No Bkp_EP1:ce14/1 Bkp_EP2:ce15/1
 Admin Status:UP Oper Status:UP

```

=====+
=====+
| EP      | OVID    | IVID    | Rx packets | Rx bytes  | Tx packets | Tx bytes
|Interface Status|
=====+
=====+
| EP1*   | -      | -      | 177629    | 12078772 | 0          | 0
|UP      |        |        |           |          |           |
| EP2*   | -      | -      | 0          | 0         | 177633    | 12079044
|UP      |        |        |           |          |           |
| bkp_EP1 | -      | -      | 0          | 0         | 0          | 0
|UP      |        |        |           |          |           |
| bkp_EP2 | -      | -      | 0          | 0         | 0          | 0
|UP      |        |        |           |          |           |
=====+
=====+
    
```

cross-connect summary

Total XC : 1
 Admin Up : 1
 Admin Down : 0
 Total Rules : 1

OcNOS#sh cross-connect count

cross-connect summary

Total XC : 1
 Admin Up : 1
 Admin Down : 0
 Total Rules : 1

Index

B

begin modifier 12
 BGP community value
 command syntax 10
 braces
 command syntax 9

C

command abbreviations 8
 command completion 8
 command line
 errors 8
 help 7
 keyboard operations 11
 command modes 15
 configure 15
 exec 15
 interface 15
 privileged exec 15
 router 15
 command negation 9
 command syntax
 ? 10
 . 10
 () 9
 {} 9
 | 9
 A.B.C.D/M 10
 AA:NN 10
 BGP community value 10
 braces 9
 conventions 9
 curly brackets 9
 HH:MM:SS 10
 IFNAME 10
 interface name 10
 IPv4 address 10
 IPv6 address 10
 LINE 10
 lowercase 9
 MAC address 10
 monospaced font 9
 numeric range 10
 parentheses 9
 parenteses 9
 period 10
 question mark 10
 square brackets 10
 time 10
 uppercase 9
 variable placeholders 10
 vertical bars 9
 WORD 10

X::X:X 10
 X::X:X/M 10
 XX:XX:XX:XX:XX:XX 10
 configure mode 15
 curly brackets
 command syntax 9

E

exec command mode 15

I

IFNAME 10
 interface mode 15
 IPv4 address
 command syntax 10
 IPv6 address
 command syntax 10

L

LINE 10

M

MAC address
 command syntax 10

P

parentheses
 command syntax 9
 parenteses
 command syntax 9
 period
 command syntax 10
 privileged exec mode 15

Q

question mark
 command syntax 10

R

router mode 15

S

show commands 12
 exclude modifier 13
 include modifier 13
 redirect modifier 14
 square brackets
 command syntax 10

T

command syntax 9

time

command syntax 10

W

WORD 10

V

vertical bars